

# 2014 FAST FACTS



## TABLE OF CONTENTS

<b>HORIZON SERIES (SPORTBOATS)</b>	<b>PAGES</b>
Horizon 180 .....	4-7
Horizon 1800B .....	8-11
Horizon 190 .....	12-15
Horizon 200 .....	16-19
Horizon 210 .....	20-23
Horizon 230 .....	24-27
Horizon 260 .....	29-31
Horizon 290 .....	32-35
Horizon 310 .....	36-39

---

<b>SL SERIES (CROSS STREAM)</b>	
SL222 .....	42-45
SL242 .....	46-49
SL262 .....	50-53

---

<b>FUNSHIP SERIES (DECK BOATS)</b>	
Funship 224 .....	56-59
Funship 244 .....	60-63

---

<b>SUNDOWNER SERIES (CUDDIES)</b>	
Sundowner 215 .....	66-69
Sundowner 235 .....	70-73
Sundowner 265 .....	74-77

---

<b>VISTA SERIES (CRUISERS)</b>	
Vista 275 .....	80-83
Vista 305 .....	84-87
Vista 335 .....	88-89
Vista 355 .....	90-93
Vista 375 .....	94-97
Vista 435 .....	98-99
Vista 475 .....	100-101

---

<b>TRAILERS</b>	
Horizon / Sundowner Series .....	102-111
SL Series .....	112-114
Funship Series .....	115-116
Dimensional Data .....	118
Warranty .....	119-123



# HORIZON SERIES

## BOWRIDERS





# HORIZON 180

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	18'0"	5.49 m
LOA w/extended Swim Platform	19'8"	6.00 m
Beam	7'7"	2.31 m
Fuel Capacity	24 gal	91 L
Draft (drive up)	16"	41 cm
Draft (drive down)	33"	84 cm
Maximum Capacity	1200 lbs	544 kg
Persons Capacity	8	6
Approx. Boat & Engine Weight	2220-2500	1010-1130
Trailer Weight	900 lbs	408 kg
Deadrise	19°	19°
Storage Length on trailer	20'10"	6.35 m
Storage Length on trailer w/ext Swim	20'10"	6.35 m
Bridge Clearance	3'9"	1.14 m
Bridge Clearance w/Arch	6'6"	1.97 m
Total Height	4'9"	1.45 m
Total Height SS/RS	4'6"	1.37 m
Total Height on Trailer	6'3"	1.91 m
Total Height on Trailer SS/RS	6'0"	1.83 m
Height on Trailer w/Wakeboard tower Dn	7'4"	2.23 m
Height on Trailer w/Wakeboard tower Up	9'0"	2.74 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 3.0L/A	135	101	2220	1010
MC 4.3L/A	190	142	2470	1120
MC 4.3 MPI/A	220	164	2500	1130
VP V6-200/SX	200	149	2500	1130
VP V6-225/SX	225	168	2500	1130

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
H180 LBS	MC 4.3MPI	1590	910	144	100	861
<b>KG</b>						
H180 KG	MC 4.3MPI	721	413	65	45	390



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 3.0L/A/135/101	14 1/4 X 21	36 X 53	AL	39-42	63-68	90	145
MC 4.3L/A/190/142	14 1/4 X 23	36 X 58	AL	48-51	77-82	90	145
MC 4.3MPI/A/220/164	14 1/4 X 21	36 X 53	AL	49-52	79-84	95	155
VP V6-200/SX/200/149	14 1/4 X 23	36 X 58	AL	47-50	76-81	95	155
VP V6-225/SX/225/168	14 1/4 X 23	36 X 58	AL	49-52	79-84	95	155

## FUEL FLOW DATA - H180 W/ MC 3.0 L/A/135/101 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	3	11
2500rpm	10	16	4	15
3000rpm	24	39	6	23
3500rpm	32	52	7	26
4000rpm	38	61	10	38
WOT	40	64	12	45

## FUEL FLOW DATA - H180 W/ MC 4.3 L/A/190/142 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	22	35	5	18
3000rpm	31	50	7	26
3500rpm	35	56	9	34
4000rpm	41	66	13	49
4500rpm	48	77	18	68
WOT	50	81	19	72

## FUEL FLOW DATA - H180 W/ MC 4.3 MPI/A/220/164 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	22	35	5	18
3000rpm	30	48	7	26
3500rpm	35	56	9	34
4000rpm	41	66	13	49
4500rpm	47	76	17	64
WOT	49	79	18	68



## FUEL FLOW DATA - H180 W/ VP V6-200/SX/200/146 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	22	35	5	18
3000rpm	30	48	7	26
3500rpm	35	56	9	34
4000rpm	41	66	12	45
4500rpm	47	76	16	60
WOT	48	77	18	68

## FUEL FLOW DATA - H180 W/ VP V6-225/SX/225/168 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	22	35	5	18
3000rpm	31	50	7	26
3500rpm	35	56	9	34
4000rpm	41	66	13	49
4500rpm	48	77	18	68
WOT	50	81	19	72

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.







# HORIZON 180 OB

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	17'11"	5.46 m
Beam	7'7"	2.31 m
Fuel Capacity	24 gal	91 L
Draft (drive up)	14"	36 cm
Draft (drive down)	31"	79 cm
Maximum Capacity	1800 lbs	816 kg
Persons Capacity	8	7
Approx. Boat & Engine Weight	1940-2080 lbs	880-943 kg
Trailer Weight	639 lbs	290 kg
Deadrise	19°	19°
Storage Length on Trailer	21'2"	6.45 m
Bridge Clearance	3'9"	1.14 m
Bridge Clearance w/Arch	6'6"	1.97 m
Total Height	4'9"	1.45 m
Total Height SS/RS	4'6"	1.37 m
Total Height on Trailer	6'3"	1.91 m
Total Height on Trailer SS/RS	6'0"	1.83 m
Height on Trailer w/Wakeboard Tower Dn	7'4"	2.23 m
Height on Trailer w/Wakeboard Tower Up	9'0"	2.74 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
EVINRUDE 90 E-TEC	90	67	1940	880
EVINRUDE 115 E-TEC	115	86	1980	898
EVINRUDE 150 E-TEC	150	112	2020	916
MERCURY 90 EFI 4S	90	67	1980	898
MERCURY 115 EFI 4S	115	86	2000	907
MERCURY 150 EFI 4S	150	112	2060	934
YAMAHA 90 4S	90	67	1970	893
YAMAHA 115 4S	115	86	2010	912
YAMAHA 150 4S	150	112	2080	943

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
H1800B	Merc 115 4S	1600	400	144	100	639
H1800B	Merc 115 4S	726	181	65	45	290



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
EV 90 E-TEC/90/67	13 1/4 X 17	34 X 43	AL	38-41	61-66	110	180
EV 115 E-TEC/115/86	13 1/4 X 17	34 X 43	AL	41-44	66-71	110	180
EV 150 E-TEC/150/112	14.8 x 17	38 X 43	AL	45-48	72-77	110	180
Merc 90 EFI 4S/90/67	13 1/4 X 17	34 X 43	AL	38-41	61-66	110	180
Merc 115 EFI 4S/115/86	13 1/4 X 17	34 X 43	AL	41-44	66-71	120	190
Merc 150 EFI 4S/150/112	14 1/2 19	37 X 48	AL	47-50	76-81	120	190
Yamaha 90 4S/90/67	13 1/4 X 17	34 X 43	AL	38-41	61-66	110	180
Yamaha 115 4S/115/86	13 1/4 X 17	34 X 43	AL	41-44	66-71	110	180
Yamaha 150 4S/150/112	14 X 19	36 X 48	AL	47-50	76-81	120	190

## FUEL FLOW DATA - H1800B W/ EVINRUDE 90 E-TEC/90/67 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	1	4
2500rpm	8	13	2	8
3000rpm	10	16	3	11
3500rpm	20	32	4	15
4000rpm	25	40	5	19
4500rpm	29	47	7	26
5000rpm	34	55	8	30
WOT	38	61	9	34

## FUEL FLOW DATA - H1800B W/ EVINRUDE 115 E-TEC/115/86 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	1	4
2500rpm	8	13	3	8
3000rpm	10	16	4	11
3500rpm	20	32	5	19
4000rpm	25	40	6	23
4500rpm	30	48	8	30
5000rpm	35	56	9	34
5500rpm	40	64	10	38
WOT	41	66	11	42

## FUEL FLOW DATA - H1800B W/ EVINRUDE 150 E-TEC/150/112 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	2	8
2500rpm	10	16	5	19
3000rpm	21	34	6	23
3500rpm	27	43	7	26
4000rpm	32	52	8	30
4500rpm	37	60	11	42
5000rpm	41	66	13	49
WOT	45	72	15	57



### FUEL FLOW DATA - H1800B W/ MERCURY 90 EFI 4S/90/67 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	6	10	1	4
2500rpm	7	11	2	8
3000rpm	8	13	3	11
3500rpm	13	21	4	15
4000rpm	22	35	4	15
4500rpm	27	43	6	23
5000rpm	31	50	6	23
5000rpm	35	56	7	26
WOT	38	61	9	34

### FUEL FLOW DATA - H1800B W/ MERCURY 115 EFI 4S/115/86 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	6	10	1	4
2500rpm	7	11	2	8
3000rpm	8	13	3	11
3500rpm	13	21	4	42
4000rpm	22	35	5	19
4500rpm	28	45	6	23
5000rpm	33	53	7	26
5500rpm	38	61	9	34
WOT	41	66	11	42

### FUEL FLOW DATA - H1800B W/ MERCURY 150 EFI 4S/150/112 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	2	8
2500rpm	10	16	4	15
3000rpm	23	37	4	15
3500rpm	28	45	5	19
4000rpm	33	53	7	26
4500rpm	39	63	10	38
5000rpm	42	68	11	42
5500rpm	47	76	13	49
WOT	48	77	14	53



### FUEL FLOW DATA - H1800B W/ YAMAHA 90 4S/90/67 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	2	8
2500rpm	10	16	4	15
3000rpm	23	37	4	15
3500rpm	28	45	5	19
4000rpm	33	53	7	26
4500rpm	39	63	10	38
5000rpm	42	68	11	42
5500rpm	47	76	13	49
WOT	48	77	14	53

### FUEL FLOW DATA - H1800B W/ YAMAHA 115 4S/115/86 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	6	10	1	4
2500rpm	7	11	2	8
3000rpm	9	14	3	11
3500rpm	16	26	4	15
4000rpm	23	37	5	19
4500rpm	29	47	6	23
5000rpm	34	55	8	30
5500rpm	39	63	10	38
WOT	41	66	11	42

### FUEL FLOW DATA - H1800B W/ YAMAHA 150 4S/150/112 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	2	8
2500rpm	10	16	4	15
3000rpm	22	35	4	15
3500rpm	28	45	5	19
4000rpm	33	53	7	26
4500rpm	38	61	9	34
5000rpm	41	66	11	42
5500rpm	46	74	13	49
WOT	47	76	15	57

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



# HORIZON 190

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	19'0"	5.79 m
LOA w/ext Swim Platform	20'8"	6.30 m
Beam	7'11"	2.41 m
Fuel Capacity	32 gal	121 L
Draft (drive up)	16"	41 cm
Draft (drive down)	33"	84 cm
Maximum Capacity	1400 lbs	635 kg
Persons Capacity	9	8
Approx. Boat & Engine Weight	2620-2830 lbs	1190-1280 kg
Trailer Weight	1025(S)/1212(T) lbs	465(S)/550(T) kg
Deadrise	20°	20°
Storage Length on Trailer	20'9"	6.32 m
Storage Length on Trailer w/ext Swim	21'2"	6.45 m
Bridge Clearance	3'10"	1.17 m
Bridge Clearance with arch/tower	6'0"	2.06 m
Total Height	5'0"	1.52 m
Total Height SS/RS	4'9"	1.45 m
Total Height on Trailer	6'6"	1.98 m
Total Height on Trailer SS/RS	6'3"	1.91 m
Height on Trailer w/Wakeboard Tower Dn	8'4"	2.54 m
Height on Trailer w/Wakeboard Tower Up	9'5"	2.87 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 4.3L/A	190	142	2620	1190
MC 4.3 MPI/A	220	164	2660	1210
MC 5.0 MPI/A	260	194	2810	1270
VP V6-200/SX	200	149	2670	1210
VP V6-225/SX	225	168	2670	1210
VP V8-225C/SX	225	168	2830	1280
VP V8-270/SX	270	201	2830	1280

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
H190	MC 4.3 MPI/A 220	1750	910	192	100	861(S) 1,123(T)
<b>KG</b>						
H190	MC 4.3 MPI/A 220	794	413	87	45	390(S) 509(T)



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 4.3L/A 190/142	14 1/4 X 21	36 X 53	AL	44-47	71-76	105	169
MC 4.3 MPI/A 220/164	14 1/2 X 19	37 X 48	AL	45-48	72-77	115	185
MC 5.0MPI/A 260/194	14 1/4 X 21	36 X 53	AL	50-53	81-85	115	185
VP V6-200/SX 200/149	14 1/4 X 21	36 X 53	AL	44-47	71-76	115	185
VP V6-225/SX 225/168	14 1/4 X 21	36 X 53	AL	46-49	74-79	115	185
VP V8-225C/SX 225/168	14 1/4 X 21	36 X 53	AL	46-49	74-79	115	185
VP V8-270/SX 270/201	14 1/4 X 21	36 X 53	AL	50-53	81-85	115	185

## FUEL FLOW DATA - H190 W/ MC 4.3L/A/190/142 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	10	16	7	26
3000rpm	26	42	8	30
3500rpm	32	52	10	38
4000rpm	36	58	13	49
4500rpm	41	66	15	57
WOT	45	72	16	60

## FUEL FLOW DATA - H190 W/ MC 4.3 MPI/A/220/164 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	10	16	7	26
3000rpm	26	42	7	26
3500rpm	32	52	9	34
4000rpm	36	58	13	49
4500rpm	42	68	17	64
WOT	46	74	18	68

## FUEL FLOW DATA - H190 W/ MC 5.0 MPI/A/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	3	11
2500rpm	9	14	6	23
3000rpm	25	40	7	26
3500rpm	32	52	9	34
4000rpm	38	61	11	42
4500rpm	42	68	14	53
5000rpm	48	77	18	68
WOT	51	82	20	76



### FUEL FLOW DATA - H190 W/ VP V6-200/SX/200/149 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
Engine Speed - RPM	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	10	16	7	26
3000rpm	26	42	7	26
3500rpm	31	50	9	34
4000rpm	36	58	12	45
4500rpm	41	66	15	57
WOT	45	72	16	60

### FUEL FLOW DATA - H190 W/ VP V6-225/SX/225/168 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	3	11
2500rpm	10	16	5	19
3000rpm	24	39	6	23
3500rpm	31	50	10	38
4000rpm	35	56	12	45
4500rpm	40	64	15	57
WOT	47	76	17	64

### FUEL FLOW DATA - H190 W/ VP V8-225/SX/225/168 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	3	11
2500rpm	10	16	6	23
3000rpm	25	40	6	23
3500rpm	32	52	9	34
4000rpm	35	56	11	42
4500rpm	40	64	15	57
WOT	47	76	17	64

### FUEL FLOW DATA - H190 W/ VP V8-270/SX/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	3	11
2500rpm	9	14	6	23
3000rpm	24	39	7	26
3500rpm	32	52	9	34
4000rpm	37	60	11	42
4500rpm	42	68	14	53
5000rpm	47	76	18	68
WOT	51	82	20	76

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.







# HORIZON 200

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	20'1"	6.12 m
LOA w/Extended Swim Platform	21'9"	6.63 m
Beam	8'3"	2.5 m
Fuel Capacity	32 gal	121 L
Draft (drive up)	16"	41 cm
Draft (drive down)	33"	84 cm
Maximum Capacity	1500 lbs	680 kg
Persons Capacity	9	8
Approx. Boat & Engine Weight	2900-3200 lbs	1320-1450 kg
Trailer Weight	1165 lbs	529 kg
Deadrise	20°	20°
Storage Length on Trailer	20'10"	7.88 m
Storage Length on Trailer w/Extended Swim	21'9"	6.63 m
Bridge Clearance	4'0"	1.22 m
Bridge Clearance with Arch/Tower	7'5"	2.31 m
Total Height	5'0"	1.52 m
Total Height SS/RS	4'9"	1.45 m
Total Height on Trailer	6'6"	1.98 m
Total Height on Trailer SS/RS	6'3"	1.88 m
Height on Trailer w/Wakeboard Tower Dn	8'4"	2.54 m
Height on Trailer w/Wakeboard Tower Up	10'1"	3.07 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 4.3MPI/A	220	164	2900	1320
MC 5.0MPI/A	260	194	3190	1450
MC 350MPI/B1	300	224	3220	1560
VP V6-225/SX	225	168	2920	1320
VP V8-225C/SX	225	168	3200	1450
VP V8-270/SX	270	201	3200	1450
VP V8-300/SX	300	224	3200	1450

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng	Fuel	Access.	Trail Wt.
<b>LBS</b>						
H200	VP V8-270/SX	2190	1010	192	100	894(S)1,101(T)
<b>KG</b>						
H200	VP V8-270/SX	993	458	87	45	406(S) 500(T)



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 4.3MPI/A/220/164	14 1/2 X 19	37 X 48	AL	45-48	72-77	115	185
MC 5.0MPI/A/260/194	14 1/4 X 21	36 X 53	AL	49-52	79-84	115	185
MC 350MPI/B1/300/224	13 3/4 X 21	35 X 53	SST	53-56	85-90	115	185
VP V6-225/SX/225/168	14 1/4 X 21	36 X 53	AL	46-49	74-79	115	185
VP V8-225C/SX/225/168	14 1/4 X 21	36 X 53	AL	46-49	74-79	115	185
VP V8-270/SX/270/201	14 1/4 X 21	36 X 53	AL	49-52	79-84	115	185
VP V8-300/SX/300/224	14 3/4 X 19	37 X 48	SST	52-55	84-89	115	185

## FUEL FLOW DATA - H200 W/ MC 4.3MPI/A/220/164 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	22	35	5	19
3000rpm	29	47	7	26
3500rpm	35	56	9	34
4000rpm	40	64	13	49
4500rpm	45	72	16	60
WOT	47	76	18	68

## FUEL FLOW DATA - H200 W/ MC 5.0 MPI/A/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	10	16	6	23
3000rpm	27	43	8	30
3500rpm	34	55	10	38
4000rpm	40	64	13	49
4500rpm	45	72	17	64
5000rpm	48	77	20	76
WOT	50	81	21	79

## FUEL FLOW DATA - H200 W/ MC 350MPI/B1/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	5	19
2500rpm	10	16	7	26
3000rpm	28	45	8	30
3500rpm	35	56	10	38
4000rpm	41	66	13	49
4500rpm	47	76	18	68
5000rpm	52	84	22	83
WOT	54	87	23	87



### FUEL FLOW DATA - H200 W/ VP V6-225/SX/225/168 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	21	34	5	19
3000rpm	29	47	7	26
3500rpm	34	55	9	34
4000rpm	39	63	12	45
4500rpm	45	72	16	60
WOT	47	76	18	68

### FUEL FLOW DATA - H200 W/ VP V8-225C/SX/225/168 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	4	15
2500rpm	22	35	5	19
3000rpm	29	47	7	26
3500rpm	34	55	9	34
4000rpm	39	63	12	45
4500rpm	45	72	17	64
WOT	47	76	18	68

### FUEL FLOW DATA - H200 W/ VP V8-270/SX/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	10	16	6	23
3000rpm	26	42	8	30
3500rpm	35	56	10	38
4000rpm	40	64	13	49
4500rpm	45	72	18	68
5000rpm	48	77	20	76
WOT	50	81	21	79

### FUEL FLOW DATA - H200 W/ VP V8-300/SX/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	4	15
2500rpm	21	34	5	19
3000rpm	30	48	8	30
3500rpm	36	58	10	38
4000rpm	41	66	13	49
4500rpm	47	76	16	60
5000rpm	52	84	20	76
WOT	53	85	21	79

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# HORIZON 210

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	21'4"	6.50 m
Beam	8'5"	2.55 m
Fuel Capacity	40 gal	151 L
Draft (drive up)	16"	40 cm
Draft (drive down)	33"	83 cm
Maximum Capacity	1600 lbs	725 kg
Persons Capacity	10	9
Approx. Boat & Engine Weight	3380-3580 lbs	1530-1580 kg
Trailer Weight	1051(S)/1234(T) lbs	477 (S)/560(T) kg
Deadrise	20°	20°
Storage Length on Trailer	21'4"	6.50 m
Bridge Clearance	4'4"	1.32 m
Bridge Clearance with Arch/Tower	7'4"	2.24 m
Total Height	5'4"	1.63 m
Total Height SS/RS	5'1"	1.55 m
Total Height on Trailer	7'0"	2.13 m
Total Height on Trailer SS/RS	6'9"	2.06 m
Height on Trailer w/Wakeboard Tower Dn	8'6"	2.59 m
Height on Trailer w/Wakeboard Tower Up	10'0"	3.05 m
Potable Water (standard or optional)	12 gal	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
MC 4.3 MPI/A	220	164 KW	3380	1530
MC 5.0 MPI /A	260	194 KW	3450	1560
MC 5.0 MPI /B3	260	194 KW	3480	1580
MC 350 MPI/B1	300	224 KW	3450	1560
MC 350 MPI/B3	300	224 KW	3580	1580
VP V6-225/SX	225	168 KW	3380	1530
VP V8-270/DP	270	201 KW	3480	1580
VP V8-270/SX	270	201 KW	3480	1580
VP V8-300/DP	300	224 KW	3480	1580
VP V8-300/SX	300	224 KW	3450	1560

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
H210	VP V8-270/DP	2290	1030	240	150	1051(S)/1234(T)
<b>KG</b>						
H210	VP V8-270/DP	1040	470	109	68	477(S)/560(T)



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 4.3 MPI/A/220/164	15" x 17"	38 x 43	A	41-44	66-71	120	190
MC 5.0 MPI /A/260/194	14 1/2" x 19"	37 x 48	A	45-48	72-77	120	190
MC 5.0 MPI /B3/260/194	24"	61	SST	47-50	76-81	120	190
MC 350 MPI/B1/300/224	15 1/4" x 19"	39 x 48	SST	49-52	79-84	120	190
MC 350 MPI/B3/300/224	26"	66	SST	51-54	82-85	120	190
VP V6-225/SX/225/168	14 1/2" x 19"	37 x 48	A	41-44	66-71	120	190
VP V8-270/DP/270/201	FH5	FH5	SST	47-50	76-81	120	190
VP V8-270/SX/270/201	15" x 17"	38 x 43	A	45-48	72-77	120	190
VP V8-300/DP/300/224	FH5	FH5	SST	51-54	82-85	120	190
VP V8-300/SX/300/224	14 3/4" x 17"	37 x 43	SST	49-52	79-84	120	190

## FUEL FLOW DATA - H210 W/ MC 4.3 MPI/A/220/164 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	3	11
2500rpm	8	13	5	19
3000rpm	10	16	8	30
3500rpm	26	42	8	30
4000rpm	31	50	10	38
4500rpm	37	60	13	49
WOT	41	66	16	60

## FUEL FLOW DATA - H210 W/ MC 5.0 MPI /A/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	9	14	6	23
3000rpm	24	39	7	26
3500rpm	31	50	9	34
4000rpm	35	57	12	45
4500rpm	41	66	16	60
WOT	46	74	20	76

## FUEL FLOW DATA - H210 W/ MC 5.0 MPI /B3/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	9	14	6	23
3000rpm	24	39	7	26
3500rpm	31	50	9	34
4000rpm	35	57	12	45
4500rpm	42	76	16	60
WOT	48	77	20	76



### FUEL FLOW DATA - H210 W/ MC 350 MPI/B1/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	19	31	6	23
3000rpm	27	43	7	26
3500rpm	33	53	9	34
4000rpm	38	61	12	45
4500rpm	44	71	15	57
5000rpm	49	79	20	76
WOT	51	82	23	87

### FUEL FLOW DATA - H210 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	19	31	6	23
3000rpm	27	43	7	26
3500rpm	33	53	9	34
4000rpm	38	61	12	45
4500rpm	44	71	15	57
5000rpm	49	79	20	76
WOT	53	85	23	87

### FUEL FLOW DATA - H210 W/ VP V6-225/SX/225/168 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	3	11
2500rpm	8	13	5	19
3000rpm	10	16	8	30
3500rpm	26	42	8	30
4000rpm	31	50	10	38
4500rpm	37	60	13	49
WOT	41	66	16	60

### FUEL FLOW DATA - H210 W/ VP V8-270/DP/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	9	14	6	23
3000rpm	24	39	7	26
3500rpm	31	50	9	34
4000rpm	35	57	12	45
4500rpm	42	76	16	60
WOT	48	77	20	76



### FUEL FLOW DATA - H210 W/ VP V8-270/SX/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	9	14	6	12
3000rpm	24	39	7	26
3500rpm	31	50	9	34
4000rpm	35	57	12	45
4500rpm	41	66	16	60
WOT	46	74	20	78

### FUEL FLOW DATA - H210 W/ VP V8-300/SX/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	19	31	6	23
3000rpm	27	43	7	26
3500rpm	33	53	9	34
4000rpm	38	61	12	45
4500rpm	44	71	15	57
5000rpm	49	79	20	76
WOT	51	82	23	87

### FUEL FLOW DATA - H210 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	19	31	6	23
3000rpm	27	43	7	26
3500rpm	33	53	9	34
4000rpm	38	61	12	45
4500rpm	44	71	15	57
5000rpm	49	79	20	76
WOT	53	85	23	87

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# HORIZON 230

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	23'4"	7.11 m
Beam	8'5"	2.55 m
Fuel Capacity	52 gal	197 L
Draft (drive up)	17"	43 cm
Draft (drive down)	34"	86 cm
Maximum Capacity	1800 lbs	862 kg
Persons Capacity	11	11
Approx. Boat & Engine Weight	4370-4450 lbs	1980-2020 kg
Trailer Weight	1505 lbs	683 kg
Deadrise	20°	20°
Storage Length on Trailer	23'4"	7.11 m
Bridge Clearance	4'5"	1.35 m
Bridge Clearance with Arch/Tower	7'5"	2.27 m
Total Height	5'6"	1.68 m
Total Height SS/RS	5'3"	1.60 m
Total Height on Trailer	7'2"	2.18 m
Total Height on Trailer SS/RS	6'11"	2.11 m
Height on Trailer w/Wakeboard Tower Dn	8'10"	2.69 m
Height on Trailer w/Wakeboard Tower Up	10'2"	3.10 m
Potable Water (standard or optional)	12 gal	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 5.0 MPI/A	260	194 KW	4370	1980
MC 5.0 MPI/B3	260	194 KW	4400	2000
MC 350 MPI/B3	300	224 KW	4400	2000
MC 377 MPI/B3 DTS	320	239 KW	4400	2000
VP V8-270/DP	270	201 KW	4400	2000
VP V8-270/SX	270	201 KW	4370	1980
VP V8-300/DP	300	224 KW	4400	2000
VP V8-320/DP	320	239 KW	4400	2000
VP V8-380/DP EVC	380	280KW	4450	2020

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
H230	VP V8-320/DP	3350	1030	310	150	1505
<b>KG</b>						
H230	VP V8-320/DP	1520	470	141	68	683



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 5.0 MPI/A/260/194	15" x 17"	38 x 43	AL	42-45	68-72	130	210
MC 5.0 MPI/B3/260/194	22 1/2"	57	SST	44-47	70-76	130	210
MC 350 MPI/B3/300/224	26"	66	SST	46-49	74-78	130	210
MC 377 MPI/B3 DTS/320/239	26"	66	SST	48-51	77-82	130	210
VP V8-270/DP/270/201	FH5	FH5	SST	44-47	70-76	130	210
VP V8-270/SX/270/201	15" x 17"	36 x 43	AL	42-45	68-72	130	210
VP V8-300/DP/300/224	FH5	FH5	SST	46-49	74-79	130	210
VP V8-320/DP/320/239	FH5	FH5	SST	48-51	77-82	130	210
VP V8-380/DP/380/280	FH5	FH5	SST	53-56	85-90	140	225

## FUEL FLOW DATA - H230 W/ MC 5.0 MPI/A/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	15	24	6	23
3000rpm	23	37	8	30
3500rpm	31	50	9	34
4000rpm	37	59	12	45
4500rpm	39	63	16	60
WOT	43	69	20	76

## FUEL FLOW DATA - H230 W/ MC 5.0 MPI/B3/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	16	26	6	23
3000rpm	24	39	8	30
3500rpm	32	52	9	34
4000rpm	38	61	12	45
4500rpm	41	66	16	60
WOT	45	72	20	76

## FUEL FLOW DATA - H230 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	6	23
2500rpm	21	34	7	27
3000rpm	28	45	9	34
3500rpm	36	58	11	42
4000rpm	41	66	15	57
4500rpm	46	74	19	72
WOT	48	77	23	87



### FUEL FLOW DATA - H230 W/ MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	6	23
2500rpm	21	34	8	30
3000rpm	28	45	10	38
3500rpm	34	55	12	45
4000rpm	40	64	17	64
4500rpm	46	74	21	79
WOT	49	79	24	91

### FUEL FLOW DATA - H230 W/ VP V8-270/DP/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	16	26	6	23
3000rpm	24	39	8	30
3500rpm	32	52	9	34
4000rpm	38	61	12	45
4500rpm	41	66	16	60
WOT	45	72	20	76

### FUEL FLOW DATA - H230 W/ VP V8-270/SX/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	15	24	6	23
3000rpm	23	37	8	30
3500rpm	31	50	9	34
4000rpm	37	59	12	45
4500rpm	39	63	16	60
WOT	43	69	20	76

### FUEL FLOW DATA - H230 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	6	23
2500rpm	21	34	7	27
3000rpm	28	45	9	34
3500rpm	36	58	11	42
4000rpm	41	66	15	57
4500rpm	46	74	19	72
WOT	48	77	23	87



### FUEL FLOW DATA - H230 W/ VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	6	23
2500rpm	21	34	8	30
3000rpm	28	45	10	38
3500rpm	34	55	12	45
4000rpm	40	64	17	64
4500rpm	46	74	21	79
WOT	49	79	24	91

### FUEL FLOW DATA - H230 W/ VP V8-380/DP/380/260 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	13	21	6	23
3000rpm	23	37	7	26
3500rpm	29	47	9	34
4000rpm	34	55	11	42
4500rpm	40	64	14	53
5000rpm	44	71	19	72
5500rpm	50	81	25	95
WOT	55	89	28	106

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



# HORIZON 260

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	26'6"	8.08 m
Beam	8'5"	2.55 m
Fuel Capacity	70 gal	265 L
Draft (drive up)	18"	46 cm
Draft (drive down)	35"	89 cm
Maximum Capacity	2250 lbs	1021 kg
Persons Capacity	13	13
Approx. Boat & Engine Weight	5100-5400 lbs	2310-2450 kg
Trailer Weight	1610 lbs	730 kg
Deadrise	20°	20°
Storage Length on Trailer	26'6"	8.08 m
Bridge Clearance	5'3"	1.60 m
Bridge Clearance with Arch/Tower	8'6"	2.59 m
Total Height	6'3"	1.90 m
Total Height SS/RS	6'0"	1.82 m
Total Height on Trailer	7'10"	2.39 m
Total Height on Trailer SS/RS	7'7"	2.13 m
Height on Trailer w/Wakeboard Tower Dn	8'10"	2.69 m
Height on Trailer w/Wakeboard Tower Up	10'4"	3.15 m
Potable Water (standard or optional)	12 gal	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 350 MPI/B3	300	224 KW	5100	2310
MC 377 MPI/B3 DTS	320	239 KW	5100	2310
MC 8.2MPI/B3XDTS	380	283 KW	5400	2450
VP V8-300/DP	300	224 KW	5100	2310
VP V8-320/DP	320	239 KW	5100	2310
VP V8 380C/DP	380	283 KW	5200	2360

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
LBS						
H260	VP V8-320/DP	4090	1010	420	200	1610
KG						
H260	VP V8-320/DP	1850	460	190	91	683



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 350 MPI/B3/300/224	26"	66	SST	43-46	71-76	130	210
MC 377 MPI/B3/320/239	26"	66	SST	45-48	72-77	130	210
MC 8.2MPI/B3X/380/283	28"	71	SST	52-55	84-89	130	210
VP V8-300/DP/300/224	FH5	FH5	SST	42-45	68-72	130	210
VP V8-320/DP/320/239	FH5	FH5	SST	43-46	69-74	130	210
VP V8-380C/DP/380/ 283	FH5	FH5	SST	50-53	81-85	140	225

## FUEL FLOW DATA - H260 W/ MC 350 MPI/B3

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	6	23
2500rpm	21	34	8	30
3000rpm	29	46	10	34
3500rpm	35	56	11	41
4000rpm	40	64	16	61
4500rpm	43	69	20	76
WOT	45	72	23	87

## FUEL FLOW DATA - H260 W/ MC 377 MPI/B3 DTS

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	6	23
2500rpm	21	34	9	34
3000rpm	30	48	10	38
3500rpm	35	56	12	45
4000rpm	40	64	17	64
4500rpm	44	71	21	79
WOT	47	76	24	91

## FUEL FLOW DATA - H260 W/ MC 8.2MPI/B3XDTS

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	8	20
2500rpm	22	35	9	34
3000rpm	34	55	12	45
3500rpm	40	64	16	60
4000rpm	46	74	20	76
4500rpm	51	82	26	98
WOT	53	85	29	110



### FUEL FLOW DATA - H260 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	6	23
2500rpm	21	34	8	30
3000rpm	29	46	10	38
3500rpm	35	56	11	41
4000rpm	40	64	16	61
4500rpm	43	69	20	76
WOT	45	72	23	87

### FUEL FLOW DATA - H260 W/ VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	6	23
2500rpm	21	34	9	34
3000rpm	30	48	10	38
3500rpm	35	56	12	45
4000rpm	40	64	17	64
4500rpm	44	74	21	79
WOT	47	76	24	91

### FUEL FLOW DATA - H260 W/ VP V8-380C/DP/380/280 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	6	23
2500rpm	14	23	8	30
3000rpm	25	40	10	38
3500rpm	34	55	14	53
4000rpm	39	63	17	64
4500rpm	42	68	20	76
5000rpm	45	72	23	87
5500rpm	48	77	25	95
WOT	51	82	27	102

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.







# HORIZON 290

includes SS

SPECIFICATIONS*	US	METRIC
LOA	30'1"	9.17 m
Beam	9'5"	2.87 m
Fuel Capacity	120 gal	454 L
Draft (drive up)	25"	64 cm
Draft (drive down)	36"	91 cm
Maximum Capacity	YACHT	1200 kg
Persons Capacity	YACHT	12 (CE)
Approx. Boat & Engine Weight	7600 - 8800 lbs	3447 - 3992 kg
Trailer Weight	n/a	n/a
Deadrise	21°	21°
Bridge Clearance	5'6"	1.68 m
Bridge Clearance with Arch	8'0"	2.44 m
Total Height	7'4"	2.23m
Potable Water	20 gal	76 L
Holding Tank	6.5 gal	25 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 8.2MPI/B3X	380	283	7900	3580
MC 8.2MPI HO/B3X	430	321	7900	3580
TWIN MC 350MPI/B3	600	448	8800	3990
TWIN MC 377MPI/B3	640	477	8800	3990
VP-V8-380/DP	380	283	7600	3450
VP-V8-430/DP	430	321	7600	3450
TWIN VP V8-300/DP	600	448	8700	3950
TWIN VP V8-320/DP	640	477	8700	3950
TWIN VP V8-380/DP	760	567	8700	3950

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
LBS						
H290	Twin VP V8-320/DP	6600	2100	780	300	n/a
KG						
H290	Twin VP V8-320/DP	2990	952	354	136	n/a



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 8.2MPI/B3X/380/283	22.5	56	SST	41-44	66-71	120	190
MC 8.2MPI HO/B3X/430/321	22.5	56	SST	43-46	69-74	120	190
Twin MC 350MPI/B3 300/224	26	66	SST	50-53	81-85	130	210
Twin MC 377MPI/B3 320/239	26	66	SST	51-54	82-87	130	210
VP-V8-380/DP/380/283	FH4	FH4	SST	41-44	66-71	130	210
VP-V8-430/DP/430/321	FH4	FH4	SST	43-46	69-74	130	210
Twin VP V8-300/DP/300/224	FH5	FH5	SST	50-53	81-85	130	210
Twin VP V8-320/DP/320/239	FH5	FH5	SST	51-54	82-87	130	210
Twin VP V8-380/DP/380/283	FH6	FH6	SST	56-59	90-95	130	210

## FUEL FLOW DATA - H290 W/ MC 8.2MPI/B3X/380/283

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	7	26
2500rpm	11	18	11	42
3000rpm	14	23	15	57
3500rpm	29	47	16	60
4000rpm	34	55	19	72
4500rpm	39	63	27	102
WOT	42	68	32	121

## FUEL FLOW DATA - H290 W/ MC 8.2MPI HO/B3X/430/321

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	7	26
2500rpm	11	18	12	45
3000rpm	14	23	15	57
3500rpm	30	48	17	64
4000rpm	35	56	19	72
4500rpm	40	64	28	106
WOT	44	71	35	132

## FUEL FLOW DATA - H290 W/ TWIN MC 350MPI/B3 300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000RPM	10	16	10	38
2500RPM	16	26	15	57
3000RPM	26	42	18	68
3500RPM	32	52	21	79
4000RPM	38	61	28	106
4500RPM	43	69	34	129
5000RPM	47	76	40	151
WOT	50	81	46	174



### FUEL FLOW DATA - H290 W/ TWIN MC 377MPI/B3 320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000RPM	10	16	10	38
2500RPM	16	26	15	57
3000RPM	26	42	18	68
3500RPM	32	52	21	79
4000RPM	38	61	28	106
4500RPM	43	69	35	132
5000RPM	48	77	42	159
WOT	52	84	48	181

### FUEL FLOW DATA - H290 W/ VP-V8-380/DP/380/283

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000RPM	8	13	5	19
2500RPM	10	16	6	23
3000RPM	12	19	7	26
3500RPM	26	42	9	34
4000RPM	30	48	11	48
4500RPM	36	58	14	53
5000RPM	39	63	19	72
5500RPM	41	66	25	95
WOT	42	68	30	113

### FUEL FLOW DATA - H290 W/ VP-V8-430/DP/430/321

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000RPM	8	13	5	19
2500RPM	10	16	6	23
3000RPM	13	21	7	26
3500RPM	26	42	9	34
4000RPM	30	48	11	48
4500RPM	36	58	15	57
5000RPM	39	63	19	72
5500RPM	42	68	26	98
WOT	44	71	33	125

### FUEL FLOW DATA - H290 W/ TWIN VP V8-300/DP/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000RPM	10	16	10	38
2500RPM	16	26	15	57
3000RPM	27	43	17	64
3500RPM	33	53	21	79
4000RPM	38	61	28	106
4500RPM	43	69	34	128
5000RPM	47	76	40	151
WOT	50	81	45	170



### FUEL FLOW DATA - H290 W/ TWIN VP V8-320/DP/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000RPM	10	16	10	38
2500RPM	16	26	15	57
3000RPM	27	43	17	64
3500RPM	33	53	21	79
4000RPM	38	61	28	106
4500RPM	43	69	34	128
5000RPM	48	77	42	159
WOT	52	84	48	181

### FUEL FLOW DATA - H290 W/ TWIN VP V8-380/DP/380/283

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000RPM	10	16	9	34
2500RPM	15	24	13	49
3000RPM	26	42	15	57
3500RPM	33	53	18	68
4000RPM	38	61	22	83
4500RPM	44	71	29	110
5000RPM	49	79	39	147
5500RPM	54	87	51	193
WOT	59	95	60	227

## FAST FACTS NOTES

---

---

---

---

---

---

---



# HORIZON 310

SPECIFICATIONS*	US	METRIC
LOA	31'4"	9.55 m
Beam	9'8"	2.84 m
Fuel Capacity	130 gal	492 L
Draft (drive up)	24"	61 cm
Draft (drive down)	35"	89 cm
Maximum Capacity	Yacht	Yacht
Persons Capacity	14	14
Approx. Boat & Engine Weight	8340-6360 lbs	3780-3790 kg
Deadrise	21°	21°
Storage Length on Trailer	31'4"	9.55 m
Bridge Clearance	5'2"	1.57 m
Bridge Clearance with Arch	8'0"	2.44 m
Total Height	7'5"	2.26 m
Potable Water (standard or optional)	20 gal	76 L
Holding Tank	12 gal	45 L
Grey Water	12 gal	45 L
Generator	3.0 kw	3.0 kw

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
TWIN MC 350 MPI/B3	300	224 KW	8340	3780
TWIN MC 377 MPI/B3	320	239 KW	8340	3780
TWIN VP V8-300/DP	300	224 KW	8360	3790
TWIN VP V8-320/DP	320	239 KW	8360	3790

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
H310	VP V8-320/DP	6420	2060	780	200	2450
<b>KG</b>						
H310	VP V8-320/DP	2910	934	354	90	1111



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin MC 350 MPI/B3/300/224	26"	66	SST	51-54	82-87	180	290
Twin MC 377 MPI/B3/320/239	26"	66	SST	53-56	85-90	180	290
Twin VP V8-300/DP/300/224	F5	F5	SST	52-55	84-89	180	290
Twin VP V8-320/DP/320/239	F6	F6	SST	54-57	87-92	180	290

## FUEL FLOW DATA - H310 W/ TWIN MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	12	45
2500rpm	18	29	14	53
3000rpm	30	48	18	68
3500rpm	37	60	22	83
4000rpm	43	69	29	110
4500rpm	48	77	38	144
WOT	53	85	46	174

## FUEL FLOW DATA - H310 W/ TWIN MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	12	45
2500rpm	18	29	14	53
3000rpm	30	48	18	68
3500rpm	37	60	22	83
4000rpm	43	69	30	113
4500rpm	49	79	40	151
WOT	55	89	48	181

## FUEL FLOW DATA - H310 W/ TWIN VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	12	45
2500rpm	18	29	14	53
3000rpm	30	48	18	68
3500rpm	37	60	22	83
4000rpm	43	69	29	110
4500rpm	48	77	38	144
WOT	53	85	46	174



## FUEL FLOW DATA - H310 W/ TWIN VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	12	45
2500rpm	18	29	14	53
3000rpm	30	48	18	68
3500rpm	37	60	22	83
4000rpm	43	69	30	113
4500rpm	49	79	40	151
WOT	55	89	48	181

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.







FOUR WINNS

SL SERIES  
CROSS STREAM





# SL222

SPECIFICATIONS*	US	METRIC
LOA	22'7"	6.88 m
Beam	8'6"	2.59 m
Fuel Capacity	50 gal	189 L
Draft (drive up)	17"	43 cm
Draft (drive down)	33"	84 cm
Maximum Capacity	1800 lbs	816 kg
Persons Capacity	10	10
Approx. Boat & Engine Weight	4450-4470 lbs	2020-2030 kg
Trailer Weight	1256 lbs	570 kg
Deadrise	20°	20°
Storage Length on Trailer	23'5"	7.14 m
Bridge Clearance	4'2"	1.27 m
Bridge Clearance with Arch/Tower	6'8"	2.09 m
Total Height	5'8"	1.73 m
Total Height on Trailer	7'5"	2.26 m
Height on Trailer w/Wakeboard Tower Dn	9'1"	2.77 m
Height on Trailer w/Wakeboard Tower Up	10'5"	3.23 m
Potable Water (standard or optional)	12 gal	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
MC 350 MPI/B3	300	224 KW	4450	2020
MC 377 MPI/B3	320	239 KW	4450	2020
VP V8-300/DP	300	224 KW	4470	2030
VP V8-320/DP	320	239 KW	4470	2030

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
SL222	VP V8-300/DP	3490	1040	300	150	NA
<b>KG</b>						
SL222	VP V8-300/DP	1580	472	136	68	NA



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 350 MPI/B3/300/224	24"	61	SST	47-50	76-80	140	225
MC 377 MPI/B3/320/239	26"	66	SST	50-53	81-85	140	225
VP V8-300/DP/300/224	F5	F5	SST	47-50	76-80	140	225
VP V8-320/DP/320/239	F5	F5	SST	49-52	79-84	140	225

## FUEL FLOW DATA - SL222 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	16	26	7	27
3000rpm	25	40	8	30
3500rpm	32	52	10	38
4000rpm	38	61	13	49
4500rpm	43	69	16	61
WOT	48	77	23	87

## FUEL FLOW DATA - SL222 W/ MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	16	26	7	27
3000rpm	25	40	8	30
3500rpm	32	52	10	38
4000rpm	39	63	13	49
4500rpm	45	72	17	64
WOT	51	82	24	91

## FUEL FLOW DATA - SL222 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	16	26	7	27
3000rpm	25	40	8	30
3500rpm	32	52	10	38
4000rpm	38	61	13	49
4500rpm	43	69	16	61
WOT	48	77	23	87



## FUEL FLOW DATA - SL222 W/ VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	16	26	7	27
3000rpm	25	40	8	30
3500rpm	32	52	10	38
4000rpm	39	63	13	49
4500rpm	44	71	17	64
WOT	50	80	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# SL242

SPECIFICATIONS*	US	METRIC
LOA	24'5"	7.44 m
Beam	8'6"	2.59 m
Fuel Capacity	58 gal	220 L
Draft (drive up)	17"	43 cm
Draft (drive down)	33"	84 cm
Maximum Capacity	2100 lbs	953 kg
Persons Capacity	12	12
Approx. Boat & Engine Weight	4870-5050 lbs	2210-2290 kg
Trailer Weight	1495 lbs	678 kg
Deadrise	20°	20°
Storage Length on Trailer	24'5"	7.44 m
Bridge Clearance	4'8"	1.42 m
Bridge Clearance with Arch/Tower	7'3"	2.21 m
Total Height	6'4"	1.93 m
Total Height on Trailer	7'9"	2.36 m
Height on Trailer w/Wakeboard Tower Dn	9'5"	2.87 m
Height on Trailer w/Wakeboard Tower Up	10'9"	3.28 m
Potable Water (standard or optional)	15 gal	57 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 350 MPI/B3	300	224 KW	4870	2210
MC 377 MPI/B3	320	239 KW	4870	2210
MC 8.2MPI/B3X	380	283 KW	5050	2290
VP V8-300/DP	300	224 KW	4890	2220
VP V8-320/DP	320	239 KW	4890	2220
VP V8-380/DP	380	280 KW	4950	2240

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
SL242	VP V8-320/DP	3910	1040	350	150	NA
<b>KG</b>						
SL242	VP V8-320/DP	1770	472	159	68	NA



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 350 MPI/B3/300/224	24"	61	SST	45-48	72-77	200	320
MC 377 MPI/B3/320/239	24"	61	SST	46-49	74-79	200	320
MC 8.2MPI/B3X/380/283	26"	66	SST	52-55	84-89	190	310
VP V8-300/DP/300/224	F4	F4	SST	45-48	72-77	200	320
VP V8-320/DP/320/239	F4	F4	SST	46-49	74-79	200	320
VP V8-375/DP/375/280	FH5	FH5	SST	51-54	82-87	200	320

## FUEL FLOW DATA - SL242 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	5	19
2500rpm	16	26	7	27
3000rpm	25	40	11	42
3500rpm	33	53	13	49
4000rpm	40	64	16	60
4500rpm	45	72	21	79
WOT	47	76	23	87

## FUEL FLOW DATA - SL242 W/ MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	5	19
2500rpm	17	27	7	27
3000rpm	26	42	11	42
3500rpm	34	55	13	49
4000rpm	41	66	16	60
4500rpm	46	74	21	79
WOT	48	77	24	91

## FUEL FLOW DATA - SL242 W/ MC 8.2MPI/B3X/380/283 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	7	27
2500rpm	24	39	9	34
3000rpm	31	50	12	45
3500rpm	37	60	16	61
4000rpm	44	71	20	76
4500rpm	51	82	30	114
WOT	54	87	33	125





### FUEL FLOW DATA - SL242 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	5	19
2500rpm	16	26	7	27
3000rpm	25	40	11	42
3500rpm	33	53	13	49
4000rpm	40	64	16	60
4500rpm	45	72	21	79
WOT	47	76	23	87

### FUEL FLOW DATA - SL242 W/ VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	5	19
2500rpm	17	27	7	27
3000rpm	26	42	11	42
3500rpm	34	55	13	49
4000rpm	41	66	16	60
4500rpm	46	74	21	79
WOT	48	77	24	91

### FUEL FLOW DATA - SL242 W/ VP V8-380/DP/380/280 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	11	18	6	23
3000rpm	16	26	8	30
3500rpm	25	40	9	34
4000rpm	31	50	11	42
4500rpm	36	58	14	53
5000rpm	41	66	19	72
5500rpm	46	74	25	95
WOT	52	84	28	106

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# SL262

SPECIFICATIONS*	US	METRIC
LOA	26'6"	8.08 m
Beam	8'6"	2.59 m
Fuel Capacity	75 gal	284 L
Draft (drive up)	17"	43 cm
Draft (drive down)	33"	84 cm
Maximum Capacity	2400 lbs	1089 kg
Persons Capacity	14	14
Approx. Boat & Engine Weight	5380-5560 lbs	2440-2520 kg
Trailer Weight	1968 lbs	893 kg
Deadrise	20°	20°
Storage Length on Trailer	26'6"	8.08 m
Bridge Clearance	5'0"	1.53 m
Bridge Clearance with Arch/Tower	7'4"	2.24 m
Total Height	6'3"	1.91 m
Total Height on Trailer	7'11"	2.41 m
Height on Trailer w/Wakeboard Tower Dn	9'5"	2.87 m
Height on Trailer w/Wakeboard Tower Up	10'11"	3.33 m
Potable Water (standard or optional)	15 gal	57 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
MC 377 MPI/B3	320	239 KW	5380	2440
MC 8.2MPI/B3X	380	283 KW	5560	2520
VP V8-320/DP	320	239 KW	5400	2340
VP V8-380/DP	380	280 KW	5450	2470

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
LBS						
SL262	VP V8-380/DP	4390	1060	450	200	1968
KG						
SL262	VP V8-380/DP	1990	480	204	91	893



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 377 MPI/B3/320/239	24"	61	SST	44-47	71-76	200	320
MC 8.2MPI/B3X/380/283	26"	66	SST	50-53	80-85	190	310
VP V8-320/DP/320/239	F4	F4	SST	44-47	71-76	200	320
VP V8-375/DP/375/280	FH4	FH4	SST	48-51	77-82	200	320

## FUEL FLOW DATA - SL262 W/ MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	13	21	7	27
3000rpm	23	37	9	34
3500rpm	30	48	11	42
4000rpm	34	55	13	49
4500rpm	39	63	19	72
WOT	45	72	24	91

## FUEL FLOW DATA - SL262 W/ MC 8.2MPI/B3X/380/283 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	7	27
2500rpm	20	32	9	34
3000rpm	29	47	12	45
3500rpm	36	58	16	61
4000rpm	43	69	20	76
4500rpm	49	79	25	95
WOT	52	84	29	110

## FUEL FLOW DATA - SL262 W/ VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	13	21	7	27
3000rpm	23	37	9	34
3500rpm	30	48	11	42
4000rpm	34	55	13	49
4500rpm	39	63	19	72
WOT	45	72	24	91



## FUEL FLOW DATA - SL262 W/ VP V8-380/DP/380/280 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	<b>8</b>	13	<b>4</b>	15
2500rpm	<b>11</b>	18	<b>6</b>	23
3000rpm	<b>17</b>	27	<b>8</b>	30
3500rpm	<b>26</b>	42	<b>9</b>	34
4000rpm	<b>30</b>	48	<b>11</b>	42
4500rpm	<b>35</b>	56	<b>14</b>	53
5000rpm	<b>39</b>	63	<b>19</b>	72
5500rpm	<b>44</b>	71	<b>25</b>	95
WOT	<b>49</b>	79	<b>28</b>	106

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# FUNSHIP SERIES

## DECK BOATS







# FUNSHIP 224

SPECIFICATIONS*	US	METRIC
LOA	<b>23'8"</b>	7.21 m
Beam	<b>8'6"</b>	2.59 m
Fuel Capacity	<b>50 gal</b>	189 L
Draft (drive up)	<b>14"</b>	36 cm
Draft (drive down)	<b>31"</b>	79 cm
Maximum Capacity	<b>1900 lbs</b>	862 kg
Persons Capacity	<b>13</b>	13
Approx. Boat & Engine Weight	<b>4190-4240 lbs</b>	1900-1920 kg
Trailer Weight	<b>1365 lbs</b>	619 kg
Deadrise	<b>17°</b>	17°
Storage Length on Trailer	<b>25'7"</b>	7.80 m
Bridge Clearance	<b>4'6"</b>	1.37 m
Bridge Clearance with Arch/Tower	<b>7'4"</b>	2.24 m
Total Height	<b>6'2"</b>	1.88 m
Total Height on Trailer	<b>8'0"</b>	2.44 m
Height on Trailer w/Wakeboard Tower Dn	<b>8'0"</b>	2.44 m
Height on Trailer w/Wakeboard Tower Up	<b>10'10"</b>	3.30 m
Potable Water (standard or optional)	<b>12 gal</b>	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 350 MPI/B1	<b>300</b>	224 KW	<b>4190</b>	1900
MC 350 MPI/B3	<b>300</b>	224 KW	<b>4210</b>	1910
VP V8-300/DP	<b>300</b>	224 KW	<b>4240</b>	1920
VP V8-300/SX	<b>300</b>	224 KW	<b>4230</b>	1920

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
<b>F224</b>	<b>VP V8-300/DP</b>	<b>3260</b>	<b>1040</b>	<b>300</b>	<b>150</b>	<b>1365</b>
<b>KG</b>						
<b>F224</b>	<b>VP V8-300/DP</b>	<b>1480</b>	<b>472</b>	<b>136</b>	<b>68</b>	<b>619</b>



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 350 MPI/B1/300/224	15 1/4" x 19"	39 x 48	SST	47-50	76-81	115	185
MC 350 MPI/B3/300/224	26"	66	SST	47-50	76-81	115	185
VP V8-300/DP/300/224	F5	F5	SST	47-50	76-81	120	193
VP V8-300/SX/300/224	14 3/4" x 19"	37 x 48	SST	47-50	76-81	115	185

## FUEL FLOW DATA - F224 W/ MC 350 MPI/B1/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	6	23
2500rpm	18	29	7	27
3000rpm	26	42	10	38
3500rpm	34	55	14	53
4000rpm	41	66	17	64
4500rpm	46	74	20	76
WOT	49	79	23	87

## FUEL FLOW DATA - F224 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	6	23
2500rpm	20	32	7	27
3000rpm	28	45	10	38
3500rpm	36	58	14	53
4000rpm	42	68	17	64
4500rpm	46	74	20	76
WOT	49	79	23	87

## FUEL FLOW DATA - F224 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	6	23
2500rpm	20	32	7	27
3000rpm	28	45	10	38
3500rpm	36	58	14	53
4000rpm	42	68	17	64
4500rpm	46	74	20	76
WOT	49	79	23	87



## FUEL FLOW DATA - F224 W/ VP V8-300/SX/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	6	23
2500rpm	18	29	7	27
3000rpm	26	42	10	38
3500rpm	34	55	14	53
4000rpm	41	66	17	64
4500rpm	46	74	20	76
WOT	49	79	23	87

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# FUNSHIP 244

SPECIFICATIONS*	US	METRIC
LOA	25'6"	7.77 m
Beam	8'6"	2.59 m
Fuel Capacity	65 gal	246 L
Draft (drive up)	17"	43 cm
Draft (drive down)	33"	84 cm
Maximum Capacity	2050 lbs	930 kg
Persons Capacity	13	13
Approx. Boat & Engine Weight	4680-4700 lbs	2120-2130 kg
Trailer Weight	2030 lbs	921 kg
Deadrise	17°	17°
Storage Length on Trailer	28'7"	8.71 m
Bridge Clearance	5'2"	1.57 m
Bridge Clearance with Arch/Tower	8'0"	2.43 m
Total Height	6'4"	1.93 m
Total Height on Trailer	8'2"	2.49 m
Height on Trailer w/Wakeboard Tower Dn	8'2"	2.49 m
Height on Trailer w/Wakeboard Tower Up	11'0"	3.35 m
Potable Water (standard or optional)	12 gal	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 350 MPI/B3	300	224 KW	4680	2120
MC 377 MPI/B3	320	239 KW	4680	2120
VP V8-300/DP	300	224 KW	4700	2130
VP V8-320/DP	320	239 KW	4700	2130

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
F244	VP V8-320/DP	3720	1040	390	150	2030
<b>KG</b>						
F244	VP V8-320/DP	1690	472	177	68	921



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 350 MPI/B3/300/224	26"	66	SST	46-49	74-79	150	240
MC 377 MPI/B3/320/239	26"	66	SST	47-50	76-80	150	240
VP V8-300/DP/300/224	F4	F4	SST	45-48	72-77	150	240
VP V8-320/DP/320/239	F4	F4	SST	46-49	74-79	150	240

## FUEL FLOW DATA - F244 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	5	19
2500rpm	23	37	7	22
3000rpm	31	50	11	42
3500rpm	38	61	13	49
4000rpm	41	66	16	60
4500rpm	45	72	21	79
WOT	47	76	23	87

## FUEL FLOW DATA - F244 W/ MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	5	19
2500rpm	23	37	7	22
3000rpm	32	52	11	42
3500rpm	39	63	13	49
4000rpm	45	72	16	60
4500rpm	47	76	21	79
WOT	49	79	24	91

## FUEL FLOW DATA - F244 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	5	19
2500rpm	23	37	7	22
3000rpm	31	50	11	42
3500rpm	38	61	13	49
4000rpm	41	66	16	60
4500rpm	45	72	21	79
WOT	47	76	23	87



## FUEL FLOW DATA - F244 W/ VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	5	19
2500rpm	23	37	7	22
3000rpm	32	52	11	42
3500rpm	39	63	13	49
4000rpm	45	72	16	60
4500rpm	47	76	21	79
WOT	49	79	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.







FOUR WINNS

5215

SUNDOWNER **SERIES**  
CUDDY CABINS





# SUNDOWNER 215

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	21'4"	6.50 m
Beam	8'5"	2.55 m
Fuel Capacity	40 gal	151 L
Draft (drive up)	16"	40 cm
Draft (drive down)	33"	83 cm
Maximum Capacity	1600 lbs	725 kg
Persons Capacity	9	8
Approx. Boat & Engine Weight	3450-4250 lbs	1560-1930 kg
Trailer Weight	1051(S)/1234(T) lbs	477(S)/560(T) kg
Deadrise	20°	20°
Storage Length on Trailer	21'4"	6.50 m
Bridge Clearance	4'8"	1.42 m
Total Height	5'7"	1.70 m
Total Height SS/RS	5'4"	1.63 m
Total Height on Trailer	7'3"	2.21 m
Total Height on Trailer RS/SS	7'0"	2.13 m
Potable Water (standard or optional)	12 gal	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 4.3 MPI/A	220	164 KW	4080	1850
MC 5.0 MPI/A	260	194 KW	3450	1560
MC 5.0 MPI/B3	260	194 KW	4250	1930
MC 350 MPI/B1	300	224 KW	4230	1920
MC 350 MPI/B3	300	224 KW	4230	1930
VP V6-225/SX	225	168 KW	4080	1850
VP V8-270/DP	270	201 KW	3480	1580
VP V8-270/SX	270	201 KW	3450	1560
VP V8-300/DP	300	224 KW	3480	1580
VP V8-300/SX	300	224 KW	3450	1560

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
S215	VP V8-300/DP	3150	1030	240	150	1051(S)/1234(T)
<b>KG</b>						
S215	VP V8-300/DP	1430	470	109	68	477(S)/560(T)

## PERFORMANCE



Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 4.3 MPIC/A/220/164	15" x 17"	38 x 43	AL	41-44	66-71	120	190
MC 5.0 MPI/A/260/194	14 1/2" x 19"	37 x 48	AL	45-48	72-77	120	190
MC 5.0 MPI/B3/260/194	24"	61	SST	47-50	76-81	120	190
MC 350 MPI/B1/300/224	15 1/4" x 19"	39 x 48	SST	49-52	79-84	120	190
MC 350 MPI/B3/300/224	26"	66	SST	51-54	82-87	120	190
VP V6-225/SX/225/168	14 1/2" x 19"	37 x 48	AL	41-44	67-71	120	190
VP V8-270/DP/270/201	FH5	FH5	SST	47-50	76-81	120	190
VP V8-270/SX/270/201	15" x 17"	38 x 43	AL	45-48	72-77	120	190
VP V8-300/DP/300/224	FH5	FH5	SST	51-54	82-85	120	190
VP V8-300/SX/300/224	14 3/4" x 17"	37 x 43	SST	49-52	79-84	120	190

### FUEL FLOW DATA - S215 W/ MC 4.3 MPIC/A/220/164 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	3	11
2500rpm	8	13	5	19
3000rpm	10	16	8	30
3500rpm	26	42	8	30
4000rpm	31	50	10	38
4500rpm	37	60	13	49
WOT	41	66	16	60

### FUEL FLOW DATA - S215 W/ MC 5.0 MPI/A/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	9	14	6	23
3000rpm	24	39	7	26
3500rpm	31	50	9	34
4000rpm	35	57	12	45
4500rpm	42	66	16	60
WOT	46	74	20	76

### FUEL FLOW DATA - S215 W/ MC 5.0 MPI/B3/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	9	14	6	23
3000rpm	24	39	7	26
3500rpm	31	50	9	34
4000rpm	35	57	12	45
4500rpm	42	76	16	60
WOT	48	77	20	76



### FUEL FLOW DATA - S215 W/ MC 350 MPI/B1/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	19	31	6	23
3000rpm	27	43	7	26
3500rpm	33	53	9	34
4000rpm	38	61	12	45
4500rpm	44	71	15	57
5000rpm	49	79	20	76
WOT	51	82	23	87

### FUEL FLOW DATA - S215 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	19	31	6	23
3000rpm	27	43	7	26
3500rpm	33	53	9	34
4000rpm	38	61	12	45
4500rpm	44	71	15	57
5000rpm	49	79	20	76
WOT	53	85	23	87

### FUEL FLOW DATA - S215 W/ VP V6-225/SX/225/168 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	7	11	3	11
2500rpm	8	13	5	19
3000rpm	10	16	8	30
3500rpm	26	42	8	30
4000rpm	31	50	10	38
4500rpm	37	60	13	49
WOT	41	66	16	60

### FUEL FLOW DATA - S215 W/ VP V8-270/DP/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	9	14	6	23
3000rpm	24	39	7	26
3500rpm	31	50	9	34
4000rpm	35	57	12	45
4500rpm	42	76	16	60
WOT	48	77	20	76



### FUEL FLOW DATA - S215 W/ VP V8-270/SX/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	4	15
2500rpm	9	14	6	23
3000rpm	24	39	7	26
3500rpm	31	50	9	34
4000rpm	35	57	12	45
4500rpm	41	66	16	60
WOT	46	74	20	78

### FUEL FLOW DATA - S215 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	19	31	6	23
3000rpm	27	43	7	26
3500rpm	33	53	9	34
4000rpm	38	61	12	45
4500rpm	44	71	15	57
5000rpm	49	79	20	76
WOT	53	85	23	87

### FUEL FLOW DATA - S215 W/ VP V8-300/SX/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	19	31	6	23
3000rpm	27	43	7	26
3500rpm	33	53	9	34
4000rpm	38	61	12	45
4500rpm	44	71	15	57
5000rpm	49	79	20	76
WOT	51	82	23	87

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



# SUNDOWNER 235

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	23'4"	7.11 m
Beam	8'5"	2.55 m
Fuel Capacity	52 gal	197 L
Draft (drive up)	17"	43 cm
Draft (drive down)	34"	86 cm
Maximum Capacity	1800 lbs	816 kg
Persons Capacity	10	9
Approx. Boat & Engine Weight	4370-4400 lbs	1980-2000 kg
Trailer Weight	1505 lbs	683 kg
Deadrise	20°	20°
Storage Length on Trailer	23'4"	7.11 m
Bridge Clearance	4'8"	1.42 m
Bridge Clearance with Arch/Tower	7'8"	2.34 m
Total Height	5'10"	1.78 m
Total Height SS/RS	5'7"	1.70 m
Total Height on Trailer	7'6"	2.29 m
Total Height on Trailer RS/SS	7'3"	2.21 m
Height on Trailer w/Wakeboard Tower Dn	8'11"	2.72 m
Height on Trailer w/Wakeboard Tower Up	10'3"	3.18 m
Potable Water (standard or optional)	12 gal	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 5.0 MPI/A	260	194 KW	4370	1980
MC 5.0 MPI/B3	260	194 KW	4400	2000
MC 350 MPI/B3	300	224 KW	4400	2000
MC 377 MPI/B3 DTS	320	239 KW	4400	2000
VP V8-270/DP	270	201 KW	4400	2000
VP V8-270/SX	270	201 KW	4370	1980
VP V8-300/DP	300	224 KW	4400	2000
VP V8-320/DP	320	239 KW	4400	2000

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
S235	VP V8-320/DP	3350	1030	310	150	1505
<b>KG</b>						
S235	VP V8-320/DP	1520	470	141	68	683



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 5.0 MPI/A/260/194	15" x 17"	38 x 43	AL	42-45	68-72	130	210
MC 5.0 MPI/B3/260/194	22 1/2"	57	SST	44-47	70-76	130	210
MC 350 MPI/B3/300/224	26"	66	SST	46-49	74-78	130	210
MC 377 MPI/B3 DTS/320/239	26"	66	SST	48-51	77-82	130	210
VP V8-270/DP/201	FH5	FH5	SST	44-47	70-76	130	210
VP V8-270/SX/270/201	15" x 17"	36 x 43	AL	42-45	68-72	130	210
VP V8-300/DP/300/224	FH5	FH5	SST	46-49	74-79	130	210
VP V8-320/DP/320/239	FH5	FH5	SST	48-51	77-82	130	210

## FUEL FLOW DATA - S235 W/ MC 5.0 MPI/A/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	15	24	6	23
3000rpm	23	37	8	30
3500rpm	31	50	9	34
4000rpm	37	59	12	45
4500rpm	39	63	16	60
WOT	43	69	20	76

## FUEL FLOW DATA - S235 W/ MC 5.0 MPI/B3/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	16	26	6	23
3000rpm	24	39	8	30
3500rpm	32	52	9	34
4000rpm	38	61	12	45
4500rpm	41	66	16	60
WOT	45	72	20	76

## FUEL FLOW DATA - S235 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	6	23
2500rpm	21	34	7	27
3000rpm	28	45	9	34
3500rpm	36	58	11	42
4000rpm	41	66	15	57
4500rpm	46	74	19	72
WOT	48	77	23	87





### FUEL FLOW DATA - S235 W/ MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	6	23
2500rpm	21	34	8	30
3000rpm	28	45	10	38
3500rpm	34	55	12	45
4000rpm	40	64	17	64
4500rpm	46	74	21	79
WOT	49	79	24	91

### FUEL FLOW DATA - S235 W/ VP V8-270/DP/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	16	26	6	23
3000rpm	24	39	8	30
3500rpm	32	52	9	34
4000rpm	38	61	12	45
4500rpm	41	66	16	60
WOT	45	72	20	76

### FUEL FLOW DATA - S235 W/ VP V8-270/SX/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	5	19
2500rpm	15	24	6	23
3000rpm	23	37	8	30
3500rpm	31	50	9	34
4000rpm	37	59	12	45
4500rpm	39	63	16	60
WOT	43	69	20	76

### FUEL FLOW DATA - S235 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	6	23
2500rpm	21	34	7	27
3000rpm	28	45	9	34
3500rpm	36	58	11	42
4000rpm	41	66	15	57
4500rpm	46	74	19	72
WOT	48	77	23	87



## FUEL FLOW DATA - S235 W/ VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	6	23
2500rpm	21	34	8	30
3000rpm	28	45	10	38
3500rpm	34	55	12	45
4000rpm	40	64	17	64
4500rpm	46	74	21	79
WOT	49	79	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



# SUNDOWNER 265

includes SS & RS

SPECIFICATIONS*	US	METRIC
LOA	26'6"	8.08 m
Beam	8'5"	2.55 m
Fuel Capacity	70 gal	265 L
Draft (drive up)	18"	46 cm
Draft (drive down)	35"	89 cm
Maximum Capacity	2100 lbs	952 kg
Persons Capacity	11	10
Approx. Boat & Engine Weight	5100-5400 lbs	2310-2450 kg
Trailer Weight	1610 lbs	730 kg
Deadrise	20°	20°
Storage Length on Trailer	26'6"	8.08 m
Bridge Clearance	5'2"	1.60 m
Bridge Clearance with Arch/Tower	7'10"	2.39 m
Total Height	6'8"	2.03 m
Total Height SS/RS	6'5"	2.01 m
Total Height on Trailer	8'3"	2.51 m
Total Height on Trailer SS/RS	8'0"	2.44 m
Height on Trailer w/Wakeboard Tower Dn	9'7"	2.92 m
Height on Trailer w/Wakeboard Tower Up	11'3"	3.42 m
Potable Water (standard or optional)	12 gal	45 L

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 350 MPI/B3	300	224 KW	5100	2310
MC 377 MPI/B3 DTS	320	239 KW	5100	2310
MC 8.2MPI/B3XDTS	380	283 KW	5400	2450
VP V8-300/DP	300	224 KW	5100	2310
VP V8-320/DP	320	239 KW	5100	2310
VP V8 380C/DP	380	283 KW	5200	2360

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
LBS						
S265	VP V8-320/DP	4090	1010	420	200	1610
KG						
S265	VP V8-320/DP	1850	460	190	91	683



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 350 MPI/B3/300/224	26"	66	SST	43-46	71-76	130	210
MC 377 MPI/B3/320/239	26"	66	SST	45-48	72-77	130	210
MC 8.2MPI/B3X/380/283	28"	71	SST	52-55	84-89	130	210
VP V8-300/DP/300/224	FH5	FH5	SST	42-45	68-72	130	210
VP V8-320/DP/320/239	FH5	FH5	SST	43-46	69-74	130	210
VP V8-380C/DP/380/ 283	FH5	FH5	SST	50-53	81-85	140	225

## FUEL FLOW DATA - S265 W/ MC 350 MPI/B3

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	6	23
2500rpm	21	34	8	30
3000rpm	29	46	10	34
3500rpm	35	56	11	41
4000rpm	40	64	16	61
4500rpm	43	69	20	76
WOT	45	72	23	87

## FUEL FLOW DATA - S265 W/ MC 377 MPI/B3 DTS

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	6	23
2500rpm	21	34	9	34
3000rpm	30	48	10	38
3500rpm	35	56	12	45
4000rpm	40	64	17	64
4500rpm	44	71	21	79
WOT	47	76	24	91

## FUEL FLOW DATA - S265 W/ MC 8.2MPI/B3XDTS

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	11	18	8	20
2500rpm	22	35	9	34
3000rpm	34	55	12	45
3500rpm	40	64	16	60
4000rpm	46	74	20	76
4500rpm	51	82	26	98
WOT	53	85	29	110



### FUEL FLOW DATA - S265 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	6	23
2500rpm	21	34	8	30
3000rpm	29	46	10	38
3500rpm	35	56	11	41
4000rpm	40	64	16	61
4500rpm	43	69	20	76
WOT	45	72	23	87

### FUEL FLOW DATA - S265 W/ VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	6	23
2500rpm	21	34	9	34
3000rpm	30	48	10	38
3500rpm	35	56	12	45
4000rpm	40	64	17	64
4500rpm	44	74	21	79
WOT	47	76	24	91

### FUEL FLOW DATA - S265 W/ VP V8-380C/DP/380/280 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	6	23
2500rpm	14	23	8	30
3000rpm	25	40	10	38
3500rpm	34	55	14	53
4000rpm	39	63	17	64
4500rpm	42	68	20	76
5000rpm	45	72	23	87
5500rpm	48	77	25	95
WOT	51	82	27	102

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





V435

FOUR WINNS

**VISTA SERIES**  
**EXPRESS CRUISERS**







# VISTA 275

SPECIFICATIONS*	US	METRIC
LOA	28'0"	8.53 m
Beam	9'2"	2.79 m
Fuel Capacity	85 gal	322 L
Draft (drive up)	22"	56 cm
Draft (drive down)	39"	99 cm
Maximum Capacity	2450 lbs	1100 kg
Persons Capacity	10	10
Approx. Boat & Engine Weight	7310-7630 lbs	3320-3460 kg
Deadrise	18°	18°
Bridge Clearance	6'8"	2.03 m
Bridge Clearance w/Arch (excl. electronics)	8'10"	2.69 m
Total Height	8'6"	2.59 m
Total Height w/Arch (excl. electronics)	10'8"	3.35 m
Potable Water (standard or optional)	25 gal	95 L
Holding Tank	17 gal	68 L
Generator, Gas	4 kw	4 kw
Air Conditioning/Heater (Cabin)	8000 BTU	8000 BTU
Headroom (max)	6'3"	1.91 m
Maximum Sleeping Depth (V-Berth)	6'11"	2.11 m
Maximum Sleeping Width (V-Berth)	7'0"	2.13 m
Maximum Sleeping Depth (Mid Cabin)	6'4"	1.93 m
Maximum Sleeping Width (Mid Cabin)	4'6"	1.37 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
MC 350 MPI/B3	300	224 KW	7310	3320
MC 377 MPI/B3 DTS	320	239 KW	7310	3320
MC 8.2 MPI/BX DTS	380	293 KW	7630	3460
VP V8-300/DP	300	224 KW	7310	3320
VP V8-320/DP EVC	320	239 KW	7310	3320

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
V275	VP V8-320/DP/E	6160	1030	510	600	N/A
<b>KG</b>						
V275	VP V8-320/DP/E	2800	470	231	272	N/A



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC 350 MPI/B3/300/224	22 1/2"	57	SST	37-40	60-64	160	260
MC 377 MPI/B3 DTS/320/239	22 1/2"	57	SST	39-42	62-68	160	260
MC 8.2 MPI/BX DTS/380/283	24"	61	SST	44-47	71-76	160	260
VP V8-300/DP/300/224	FH4	FH4	Nibral	37-40	60-64	160	260
VP V8-320/DP/320/239	FH4	FH4	SST	39-42	62-68	160	260

## FUEL FLOW DATA - V275 W/ MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	6	23
2500rpm	11	18	8	30
3000rpm	24	42	11	42
3500rpm	31	50	14	53
4000rpm	35	58	17	64
4500rpm	37	63	20	76
WOT	41	66	23	87

## FUEL FLOW DATA - V275 W/ MC 377 MPI/B3 DTS/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	6	23
2500rpm	11	18	8	30
3000rpm	24	42	11	42
3500rpm	31	50	14	53
4000rpm	35	58	17	64
4500rpm	37	60	20	76
WOT	41	66	24	91

## FUEL FLOW DATA - V275 W/ MC 8.2 MPI/BX DTS/380/283 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	15	7	27
2500rpm	13	21	10	38
3000rpm	29	46	12	45
3500rpm	35	56	17	57
4000rpm	40	64	21	79
4500rpm	44	71	27	102
WOT	45	72	31	117



### FUEL FLOW DATA - V275 W/ VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	6	23
2500rpm	11	18	8	30
3000rpm	24	42	11	42
3500rpm	31	50	14	53
4000rpm	35	58	17	64
4500rpm	37	63	20	76
WOT	41	66	23	87

### FUEL FLOW DATA - V275 W/ VP V8-320EVC/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	6	23
2500rpm	11	18	8	30
3000rpm	24	42	11	42
3500rpm	31	50	14	53
4000rpm	35	58	17	64
4500rpm	38	61	20	76
WOT	42	66	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# VISTA 305

SPECIFICATIONS*	US	METRIC
LOA	30'5"	9.27 m
Beam	10'2"	3.10 m
Fuel Capacity	120 gal	454 L
Draft (drive up)	30"	76 cm
Draft (drive down)	40"	102 cm
Maximum Capacity	Yacht	Yacht
Persons Capacity	10	10
Approx. Boat & Engine Weight	10300-10800 lbs	4670-4900 kg
Deadrise	18°	8°
Bridge Clearance w/Arch (excl. electronics)	9'9"	2.97 m
Total Height w/Arch (excl. electronics)	11'10"	3.61 m
Potable Water (standard or optional)	36 gal	136 L
Holding Tank	28 gal	106 L
Generator, Gas	4 kw	4 kw
Air Conditioning/Heater (Cabin)	12000 BTU	12000 BTU
Air Conditioning/Heater (Cockpit)	12000 BTU	12000 BTU
Headroom (max)	6'4"	1.93 m
Maximum Sleeping Depth (V-Berth)	5'10"	1.78 m
Maximum Sleeping Width (V-Berth)	6'1"	1.85 m
Maximum Sleeping Depth (Mid Cabin)	6'8"	2.03 m
Maximum Sleeping Width (Mid Cabin)	5'0"	1.52 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
TWIN MC 4.3 MPI/B3	220	164 KW	10560	4790
TWIN MC 5.0 MPI/B3	260	194 KW	10800	4900
TWIN VP D3-220/DPS	209	154 KW	10300	4670
TWIN VP V6-225/DP	225	168 KW	10560	4790
TWIN VP V8-320/DP	270	201 KW	10800	4900

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
V305	VP V8-270/DP	8720	2080	720	600	n/a
<b>KG</b>						
V305	VP V8-270/DP	3950	943	344	272	n/a



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin MC 4.3MPI/B3/220/164	22.5"	57	SST	37-39	60-63	130	210
Twin MC 5.0 MPI/B3/260/194	57"	57	SST	41-43	66-69	130	210
Twin VP D3-220/DPS/209/154	F4	F4	SST	38-41	61-66	180	290
Twin VP V6-225/DP/225/168	F4	F4	SST	37-39	60-63	130	210
Twin VP V8-270/DP/270/201	F4	F4	SST	41-43	66-69	130	210

## FUEL FLOW DATA - V305 W/ TWIN MC 4.3MPI/B3/200/164 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	6	10	7	26
2500rpm	9	14	12	45
3000rpm	12	19	17	64
3500rpm	24	39	20	76
4000rpm	28	45	26	98
4500rpm	35	56	32	121
WOT	38	61	36	136

## FUEL FLOW DATA - V305 W/ TWIN MC 5.0 MPI/B3/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	7	26
2500rpm	10	16	14	53
3000rpm	13	21	20	76
3500rpm	26	42	21	79
4000rpm	32	52	24	91
4500rpm	37	60	30	113
5000rpm	41	66	37	140
WOT	42	68	40	151

## FUEL FLOW DATA - V305 W/ TWIN VP D3-220/DPS/209/154 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	7	26
2500rpm	12	19	12	45
3000rpm	23	37	13	49
3500rpm	31	50	15	57
4000rpm	37	60	22	83
WOT	39	63	25	95



### FUEL FLOW DATA - V305 W/ TWIN VP V6-225/DP/225/168 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	6	10	7	26
2500rpm	10	16	12	45
3000rpm	12	19	17	64
3500rpm	24	39	21	79
4000rpm	29	47	26	98
4500rpm	35	56	33	124
WOT	38	61	36	136

### FUEL FLOW DATA - V305 W/ TWIN VP V8-270/DP/270/201 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	8	13	7	26
2500rpm	10	16	14	53
3000rpm	13	21	20	76
3500rpm	26	42	21	80
4000rpm	32	52	24	91
4500rpm	37	60	30	113
5000rpm	41	66	37	140
WOT	42	68	40	151

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.







# VISTA 335

SPECIFICATIONS*	US	METRIC
LOA	33'0"	10.06 m
Beam	10'9"	3.28 m
Fuel Capacity	170 gal	6441 L
Draft (drive up)	26"	66 cm
Draft (drive down)	38"	97 cm
Maximum Capacity	Yacht	Yacht
Persons Capacity	11	11
Approx. Boat & Engine Weight	11900-12350 lbs	5400-5600 kg
Deadrise	19°	19°
Bridge Clearance (excl. electronics)	10'6"	3.20 m
Total Height	12'2"	3.71 m
Potable Water (standard or optional)	35 gal	132 L
Holding Tank	27 gal	1041 L
Generator, Gas	5.0 KW @ 110 VAC	5.0 KW @ 110 VAC
Generator, Gas	4.0 KW @ 220 VAC	4.0 KW @ 220 VAC
Air Conditioning/Heater (Cabin)	10000 BTU	10000 BTU
Headroom (max)	6'5"	1.96 m
Maximum Sleeping Depth (V-Berth)	6'8"	2.03 m
Maximum Sleeping Width (V-Berth)	6'2"	1.88 m
Maximum Sleeping Depth (Mid Cabin)	6'0"	1.83 m
Maximum Sleeping Width (Mid Cabin)	4'4"	1.32 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
TWIN MC 350 MPI/B3	300	224 KW	12310	5580
TWIN VP D3-220/DPS	209	154 KW	11900	5400
TWIN VP V8-300/DP	300	224 KW	12350	5600

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
V335	VP V8-300/DP	10200	2080	1020	750	n/a
<b>KG</b>						
V335	VP V8-300/DP	4630	943	463	344	n/a



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin MC 350 MPI/B3/300/224	24"	61	SST	43-46	69-74	220	350
Twin VP D3-220/DPS/209/154	F4	F4	SST	40-42	64-68	310	500
Twin VP V8-300/DP/300/224	F3	F3	SST	42-45	68-72	220	350

## FUEL FLOW DATA - V335 W/ TWIN MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	9	34
2500rpm	19	31	14	53
3000rpm	26	42	18	68
3500rpm	31	50	24	91
4000rpm	38	61	30	114
4500rpm	43	69	38	144
WOT	45	72	46	174

## FUEL FLOW DATA - V335 W/ TWIN VP D3-220/DPS/209/154 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	8	30
2500rpm	13	21	13	49
3000rpm	25	40	13	49
3500rpm	33	53	16	60
4000rpm	40	64	22	83
WOT	42	68	25	95

## FUEL FLOW DATA - V335 W/ TWIN VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	9	34
2500rpm	19	31	14	53
3000rpm	26	42	18	68
3500rpm	31	50	24	91
4000rpm	37	60	30	114
4500rpm	42	68	38	144
WOT	44	71	46	174

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



# VISTA 355

SPECIFICATIONS*	US	METRIC
LOA	35'0"	10.67 m
Beam	11'6"	3.51 m
Fuel Capacity	200 gal	757 L
Draft (drive up)	28"	71 cm
Draft (drive down)	40"	102 cm
Maximum Capacity	Yacht	Yacht
Persons Capacity	11	11
Approx. Boat & Engine Weight	13300-13850 lbs	6030-6280 kg
Deadrise	19°	19°
Bridge Clearance (excl. electronics)	10'2"	3.10 m
Total Height	12'2"	3.71 m
Potable Water (standard or optional)	45 gal	170 L
Holding Tank	30 gal	113 L
Generator, Gas	5.0 KW @ 110 VAC	5.0 KW @ 110 VAC
Generator, Gas	4.0 KW @ 220 VAC	4.0 KW @ 220 VAC
Air Conditioning/Heater (Cabin)	12000 BTU	12000 BTU
Headroom (max)	6'8"	2.03 m
Maximum Sleeping Depth (V-Berth)	6'0"	1.83 m
Maximum Sleeping Width (V-Berth)	6'2"	1.88 m
Maximum Sleeping Depth (Mid Cabin)	6'0"	1.83 m
Maximum Sleeping Width (Mid Cabin)	5'6"	1.32 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
TWIN MC 350 MPI/B3	300	224 KW	13810	6260
TWIN MC 377 MPI/B3	320	239 KW	13810	6260
TWIN VP D3-220/DPS	209	154 KW	13300	6030
TWIN VP V8-300/DP	300	224 KW	13850	6280
TWIN VP V8-320/DP	320	239 KW	13850	6280

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
V355	VP V8-320/DP	11660	2080	1200	900	n/a
<b>KG</b>						
V355	VP V8-320/DP	5290	943	544	408	n/a



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin MC 350 MPI/B3/300/224	24"	61	SST	41-44	66-71	230	370
Twin MC 377 MPI/B3/320/239	24"	61	SST	43-46	69-74	230	370
Twin VP D3-220/DPS/209/154	F3	F3	SST	38-40	61-64	320	515
Twin VP V8-300/DP/300/224	F4	F4	SST	41-44	66-71	230	370
Twin VP V8-320/DP/320/239	F4	F4	SST	43-46	69-74	230	370

## FUEL FLOW DATA - V355 W/ TWIN MC 350 MPI/B3/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	10	38
2500rpm	17	27	15	57
3000rpm	25	40	20	76
3500rpm	31	50	25	95
4000rpm	37	60	32	121
4500rpm	41	66	39	147
WOT	43	69	46	174

## FUEL FLOW DATA - V355 W/ TWIN MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	10	38
2500rpm	17	27	15	57
3000rpm	25	40	20	76
3500rpm	31	50	25	95
4000rpm	37	60	33	125
4500rpm	41	66	40	151
WOT	44	71	48	181

## FUEL FLOW DATA - V355 W/ TWIN VP D3-220/DPS/209/154 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	9	14	8	30
2500rpm	12	19	13	49
3000rpm	24	39	13	49
3500rpm	32	52	16	60
4000rpm	38	61	22	83
WOT	39	63	25	95



### FUEL FLOW DATA - V355 W/ TWIN VP V8-300/DP/300/224 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	10	38
2500rpm	17	27	15	57
3000rpm	25	40	20	76
3500rpm	31	50	25	95
4000rpm	37	60	32	121
4500rpm	41	66	39	147
WOT	43	69	46	174

### FUEL FLOW DATA - V355 W/ TWIN VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	10	38
2500rpm	17	27	15	57
3000rpm	25	40	20	76
3500rpm	31	50	25	95
4000rpm	37	60	33	125
4500rpm	41	66	40	151
WOT	44	71	48	181

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# VISTA 375

SPECIFICATIONS*	US	METRIC
LOA	<b>37'0"</b>	11.28 m
Beam	<b>12'0"</b>	3.66 m
Fuel Capacity	<b>230 gal</b>	871 L
Draft (drive up)	<b>28"</b>	71 cm
Draft (drive down)	<b>40"</b>	102 cm
Maximum Capacity	<b>Yacht</b>	Yacht
Persons Capacity	<b>12</b>	12
Approx. Boat & Engine Weight	<b>14710-16750 lbs</b>	6670-7600 kg
Deadrise	<b>19°</b>	19°
Bridge Clearance (excl. electronics)	<b>10'3"</b>	3.13 m
Total Height	<b>12'5"</b>	3.78 m
Potable Water (standard or optional)	<b>51 gal</b>	193 L
Holding Tank	<b>30 gal</b>	113 L
Generator, Gas	<b>5.0 KW @ 110 VAC</b>	5.0 KW @ 110 VAC
Generator, Gas	<b>4.0 KW @ 220 VAC</b>	4.0 KW @ 220 VAC
Generator, Diesel	<b>6.0 KW @ 110 VAC</b>	6.0 KW @ 110 VAC
Generator, Diesel	<b>4.5 KW @ 220 VAC</b>	4.5 KW @ 220 VAC
Air Conditioning/Heater (Cabin)	<b>16000 BTU</b>	16000 BTU
Headroom (max)	<b>6'4"</b>	1.93 m
Maximum Sleeping Depth (V-Berth)	<b>6'2"</b>	1.88 m
Maximum Sleeping Width (V-Berth)	<b>6'6"</b>	1.98 m
Maximum Sleeping Depth (Mid Cabin)	<b>6'0"</b>	1.83 m
Maximum Sleeping Width (Mid Cabin)	<b>5'6"</b>	1.68 m

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
TWIN MC 377 MPI/B3	320	239 KW	14710	6670
TWIN VP D4 260/DPH	250	184 KW	16750	7600
TWIN VP V8-320/DP	320	239 KW	14750	6690
TWIN VP D4 260	260	194 KW	16450	7460

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
V375	VP V8-320/DP	13500	2080	1380	1000	n/a
<b>KG</b>						
V375	VP V8-320/DP	6120	943	626	454	n/a



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin MC 377 MPI/B3/320/239	22.5"	57	SST	41-44	68-71	230	370
Twin VP D4 260/DPH/250/184	G5	G5	Nibra	38-40	61-64	330	530
Twin VP V8-320/DP/320/239	F4	F4	SST	41-44	68-71	230	370
Twin VP D4 260/260/194	19" x 23"	48 x 58	Nibra	32-34	51-55	250	400

## FUEL FLOW DATA - V375 W/ TWIN MC 377 MPI/B3/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	10	38
2500rpm	17	27	15	57
3000rpm	25	40	20	76
3500rpm	31	50	25	95
4000rpm	36	58	33	125
4500rpm	40	64	40	151
WOT	42	68	48	181

## FUEL FLOW DATA - V375 W/ TWIN VP D4 260/DPH/250/184 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1500rpm	9	14	5	19
2000rpm	11	18	11	42
2500rpm	19	31	16	61
3000rpm	31	50	17	64
3250rpm	34	55	20	76
3500rpm	37	60	25	95
WOT	39	63	28	106

## FUEL FLOW DATA - V375 W/ TWIN VP V8-320/DP/320/239 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000rpm	10	16	10	38
2500rpm	17	27	15	57
3000rpm	25	40	20	76
3500rpm	31	50	25	95
4000rpm	36	58	33	125
4500rpm	40	64	40	151
WOT	42	68	48	181





## FUEL FLOW DATA - V375 W/ TWIN VP D4 260/260/194 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1000rpm	6	9	1	4
1500rpm	9	14	3	11
2000rpm	11	18	8	30
2500rpm	14	23	14	53
3000rpm	24	39	17	64
3250rpm	28	45	20	76
3500rpm	31	50	24	91
WOT	33	53	27	102

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





# VISTA 435

SPECIFICATIONS*	US	METRIC
LOA	43'6"	13.3 m
Beam	13'4"	4.07 m
Fuel Capacity	300 gal	1,130 L
Draft	44"	112 cm
Maximum Capacity	Yacht	Yacht
Persons Capacity	16	16
Approx. Boat & Engine Weight	26000 lbs	12700 kg
Deadrise	19°	19°
Bridge Clearance (excl. electronics)	12'8"	3.86 m
Total Height	13'9"	4.19 m
Potable Water (standard or optional)	85 gal	321 L
Holding Tank	53 gal	200 L
Gray Water	45 gal	170 L
Generator, Diesel	10 KW @ 110 VAC	10 KW @ 110 VAC
Generator, Diesel	8 KW @ 220 VAC	8 KW @ 220 VAC
Air Conditioning/Heater (Cabin)	24,000 BTU	24,000 BTU
Air Conditioning/Heater (Cockpit)	16,000 BTU	16,000 BTU
Headroom (max)	7'1"	2.16 m
Maximum Sleeping Depth (V-Berth)	6'5"	1.96 m
Maximum Sleeping Width (V-Berth)	5'10"	1.78 m
Maximum Sleeping Depth (Mid Cabin)	4'6"	1.37 m
Maximum Sleeping Width (Mid Cabin)	6'0"	1.83 m
Maximum capacity or Hydraulic	1000 lbs	454 kg

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
TWIN VP IPS 500	352	259 KW	26000	12700
TWIN VP IPS 600	418	307 KW	26000	12700

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
V435	VP IPS 600	24200	3920	2160	1300	n/a
<b>KG</b>						
V435	VP IPS 600	11000	1780	980	590	n/a



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin VP IPS 500/352/259	T3	T3	Nibra	35-37	56-60	310	500
Twin VP IPS 600/418/307	T4	T4	Nibra	39-41	63-66	310	500

## FUEL FLOW DATA - V435 W/ TWIN VP IPS 500/352/259 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1000rpm	6	10	2	8
1500rpm	9	14	5	19
2000rpm	13	21	14	53
2500rpm	22	35	21	79
3000rpm	30	48	28	106
3500rpm	35	56	39	147
WOT	36	58	41	155

## FUEL FLOW DATA - V435 W/ TWIN VP IPS 600/418/307 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1000rpm	7	11	2	8
1500rpm	11	18	6	23
2000rpm	15	24	15	57
2500rpm	25	40	25	95
3000rpm	34	55	29	110
3500rpm	39	63	40	151
WOT	40	64	44	166

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



# VISTA 475

SPECIFICATIONS*	US	METRIC
LOA	49'4"	15.03 m
Beam	14'0"	4.27 m
Fuel Capacity	380 gal	1,438 L
Draft	4'3"	109 cm
Maximum Capacity	Yacht	Yacht
Persons Capacity	18	18
Approx. Boat & Engine Weight	30,000 lbs	13,600 kg
Deadrise	19°	19°
Length w/o Swim Platform	44'6"	13.56 m
Bridge Clearance (excl. electronics)	12'0"	3.66 m
Total Height	12'0"	3.66 m
Potable Water (standard or optional)	101 gal	382 L
Holding Tank	57 gal	215 L
Gray Water	42 gal	159 L
Generator, Diesel	10 KW @ 110 VAC	10 KW @ 110 VAC
Generator, Diesel	8 KW @ 220 VAC	8 KW @ 220 VAC
Air Conditioning/Heater (Cabin)	24,000 BTU	24,000 BTU
Air Conditioning/Heater (Cockpit)	32,000 BTU	32,000 BTU
Headroom (max)	6'6"	1.98 m
Maximum Sleeping Depth (V-Berth)	6'1"	1.85 m
Maximum Sleeping Width (V-Berth)	6'4"	1.93 m
Maximum Sleeping Depth (Mid Cabin)	6'8"	2.03 m
Maximum Sleeping Width (Mid Cabin)	6'9"	2.06 m
Maximum Capacity or Hydraulic	1000 lbs	454 kg

\*Dimensional diagram is located on page 118

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	kW	Lbs	KG
TWIN VP IPS 600	418	307 KW	30000	13600

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Fuel	Access.	Trail Wt.
<b>LBS</b>						
V475	VP IPS 600	26000	3960	2740	1500	n/a
<b>KG</b>						
V475	VP IPS 600	11800	1800	1240	680	n/a



## PERFORMANCE

Power HP/ kW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin VP IPS 600/418/307 KW	T3	T3	Nibra	37-39	60-63	380	610

## FUEL FLOW DATA - V475 W/ TWIN VP IPS 600/418/307 KW

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1000rpm	7	11	2	8
1500rpm	10	16	6	23
2000rpm	15	24	15	57
2500rpm	26	42	22	83
3000rpm	33	53	28	106
3500rpm	37	60	40	151
WOT	38	61	44	167

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## H180 OB SINGLE AXLE TRAILER

(Model #D0180SMS)

Length w/ Tongue	<b>20' 1"</b>	6.121 M
Length w/ Tongue Folded	<b>17' 11"</b>	5.461 M
Width	<b>8' 2"</b>	2.489 M
Empty Weight	<b>639 LBS</b>	290 KG
Carrying Capacity	<b>2,861 LBS</b>	1,298 KG
GVWR (Gross Vehical Weight Rating)	<b>3,500 LBS</b>	1,996 KG
GAWR (Gross Axle Weight Rating)	<b>3,500 LBS</b>	2,268 KG
Tire Size / Range (Standard)	<b>ST 205/75D14 BIAS</b>	ST 205/75D14 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 215/75R14-C</b>	ST 215/75R14-C
Tire Pressure (Standard)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Pressure (Rugged Tow)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Capacity (Standard)	<b>1,760 LBS</b>	798 KG
Tire Capacity (Rugged Tow)	<b>1,870 LBS</b>	848 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>SINGLE</b>	SINGLE
Axle Rating (Per Axle)	<b>3,500 LBS</b>	1,588 KG
Hub	<b>5 LUG 4.5" PATTERN</b>	5 LUG 11 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,200 LBS</b>	544 KG
Winch	<b>1,800 LBS</b>	818 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>21"</b>	53.3 CM
Ball Towing Height (Rugged Tow)	<b>22.5"</b>	57 CM



## H180 SINGLE AXLE TRAILER

(Model #D0180LRS)

Trailer length w/ Tongue	<b>20' 1"</b>	6.121 M
Trailer length w/ Tongue Folded	<b>17' 11"</b>	5.461 M
Width	<b>8' 2"</b>	2.489 M
Empty weight	<b>900 LBS</b>	408 KG
Carrying Capacity	<b>3,539 LBS</b>	1606 KG
GVWR (Gross Vehical Weight Rating)	<b>4,400 LBS</b>	1,996 KG
GAWR (Gross Axle Weight Rating)	<b>4,400 LBS</b>	1,996KG
Tire Size / Range (Standard)	<b>ST 225/75D15 BIAS</b>	ST 225/75D15 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 225/75R15-E</b>	ST 225/75R15-E
Tire Pressure (standard)	<b>65 PSI COLD</b>	450 KPA COLD
Tire Pressure (Rugged Tow)	<b>80 PSI COLD</b>	550 KPA COLD
Tire Capacity (Standard)	<b>2,540 LBS</b>	1,152 KG
Tire capacity (Rugged Tow)	<b>2,830 LBS</b>	1,283 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>SINGLE</b>	SINGLE
Axle Rating (Per Axle)	<b>5,000 LBS</b>	1,996KG
Hub	<b>6 LUG 5.5" PATTERN</b>	6 LUG 14 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,200 LBS</b>	544 KG
Winch	<b>1,800 LBS</b>	818 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>24"</b>	61 CM
Ball Towing Height (Rugged Tow)	<b>24"</b>	61 CM





## H190 SINGLE AXLE TRAILER

(Model #D0190MDS)

Trailer length w/ Tongue	<b>20' 1"</b>	6.121 M
Trailer length w/ Tongue Folded	<b>17' 11"</b>	5.461 M
Width	<b>8' 2"</b>	2.489 M
Empty weight w/spare	<b>861 LBS</b>	390 KG
Carrying Capacity	<b>4139 LBS</b>	1877 KG
GVWR (Gross Vehical Weight Rating)	<b>5,000 LBS</b>	2,268 KG
GAWR (Gross Axle Weight Rating)	<b>5,000 LBS</b>	2,268 KG
Tire Size / Range. (Standard)	<b>ST 225/75D15 BIAS</b>	ST 225/75D15 BIAS
Tire Size / Range. (Rugged Tow)	<b>ST 225/75R15-E</b>	ST 225/75R15-E
Tire Pressure (standard)	<b>65 PSI COLD</b>	450 KPA COLD
Tire Pressure (Rugged Tow)	<b>80 PSI COLD</b>	550 KPA COLD
Tire Capacity (Standard)	<b>2,540 LBS</b>	1,152 KG
Tire capacity (Rugged Tow)	<b>2,830 LBS</b>	1,283 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>SINGLE</b>	SINGLE
Axle Rating (Per Axle)	<b>5,000 LBS</b>	1,996KG
Hub	<b>6 LUG 5.5" PATTERN</b>	6 LUG 14 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,200 LBS</b>	544 KG
Winch	<b>1,800 LBS</b>	818 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>24"</b>	61 CM
Ball Towing Height (Rugged Tow)	<b>24"</b>	61 CM



## H190 TANDEM AXLE TRAILER

(Model #D0190MDT)

Length w/ Tongue	<b>20' 1"</b>	6.121 M
Length w/ Tongue Folded	<b>17' 11"</b>	5.461 M
Width	<b>8' 0"</b>	2.44 M
Empty Weight w/ spare	<b>1,123 LBS</b>	509 KG
Carrying Capacity	<b>5,877 LBS</b>	2666 KG
GVWR (Gross Vehical Weight Rating)	<b>7,000 LBS</b>	3,175 KG
GAWR (Gross Axle Weight Rating)	<b>7,000 LBS</b>	3,175 KG
Tire Size / Range (Standard)	<b>ST 205/75D14 BIAS</b>	ST 205/75D14 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 215/75R14-C</b>	ST 215/75R14-C
Tire Pressure (Standard)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Pressure (Rugged Tow)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Capacity (Standard)	<b>1,760 LBS</b>	798 KG
Tire Capacity (Rugged Tow)	<b>1,870 LBS</b>	848 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>3,500 LBS</b>	1,588 KG
Hub	<b>5 LUG 4.5" PATTERN</b>	5 LUG 11 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>1,800 LBS</b>	818 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>21"</b>	53.3 CM
Ball Towing Height (Rugged Tow)	<b>22.5"</b>	57 CM



## H200 SINGLE AXLE TRAILER

(Model #DO200MWS)

Length w/ Tongue	<b>20' 1"</b>	6.12 M
Length w/ Tongue Folded	<b>17' 11"</b>	5.461 M
Width	<b>8' 6"</b>	2.59 M
Empty Weight w/ spare	<b>894 LBS</b>	405.5 KG
Carrying Capacity	<b>4,106 LBS</b>	1,862 KG
GVWR (Gross Vehical Weight Rating)	<b>5,000 LBS</b>	2,268 KG
GAWR (Gross Axle Weight Rating)	<b>5,000 LBS</b>	2,268 KG
Tire Size / Range (Standard)	<b>ST 225/75D15 BIAS</b>	ST 225/75D15 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 225/75R15-E</b>	ST 225/75R15-E
Tire Pressure (Standard)	<b>65 PSI COLD</b>	450 KPA COLD
Tire Pressure (Rugged Tow)	<b>80 PSI COLD</b>	550 KPA COLD
Tire Capacity (Standard)	<b>2,540 LBS</b>	1,152 KG
Tire Capacity (Rugged Tow)	<b>2,830 LBS</b>	1,283 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6 NM-162.8NM
Axle	<b>SINGLE</b>	SINGLE
Axle Rating (Per Axle)	<b>5,000 LBS</b>	2,268 KG
Hub	<b>6 LUG 5.5" PATTERN</b>	6 LUG 14 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,200 LBS</b>	544 KG
Winch	<b>1,800 LBS</b>	818 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>24"</b>	61 CM
Ball Towing Height (Rugged Tow)	<b>24"</b>	61 CM



## H200 TANDEM AXLE TRAILER

(Model #DO200MWT)

Length w/ Tongue	20' 1"	6.12 M
Length w/ Tongue Folded	17' 1"	5.461 M
Width	8' 6"	2.59 M
Empty Weight w/ spare	1,101 LBS	500 KG
Carrying Capacity	5,899 LBS	2676 KG
GVWR (Gross Vehical Weight Rating)	7,000 LBS	3,175 KG
GAWR (Gross Axle Weight Rating)	7,000 LBS	3,175 KG
Tire Size / Range (Standard)	ST 205/75D14 BIAS	ST 205/75D14 BIAS
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure (Standard)	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 LBS	798 KG
Tire Capacity (Rugged Tow)	1,870 LBS	848 KG
Lug Nut Torque	90-120 FT/LBS	120.6NM-162.8NM
Axle	TANDEM	TANDEM
Axle Rating (Per Axle)	3,500 LBS	1,588 KG
Hub	5 LUG 4.5" PATTERN	5 LUG 11CM PATTERN
Wheel Type	SILVER	SILVER
Jack Capacity	1,600 LBS	726 KG
Winch	1,800 LBS	818 KG
Ball Size	2"	5 CM
Ball Towing Height	21"	53.3 CM
Ball Towing Height (Rugged Tow)	22.5"	57 CM



## H210 SINGLE AXLE TRAILER

(Model #D0210MTS)

Length w/ Tongue	<b>24' 8"</b>	6.27 M
Length w/ Tongue Folded	<b>22'</b>	6.706 M
Width	<b>8' 6"</b>	2.59 M
Empty Weight	<b>1,029 LBS</b>	467 KG
Carrying Capacity	<b>3,971 LBS</b>	1,801 KG
GVWR (Gross Vehical Weight Rating)	<b>5,000 LBS</b>	2,268 KG
GAWR (Gross Axle Weight Rating)	<b>5,000 LBS</b>	2,268 KG
Tire Size / Range (Standard)	<b>ST 225/75D15 BIAS</b>	ST 225/75D15 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 225/75R15-E</b>	ST 225/75R15-E
Tire Pressure (Standard)	<b>65 PSI COLD</b>	450 KPA COLD
Tire Pressure (Rugged Tow)	<b>80 PSI COLD</b>	550 KPA COLD
Tire Capacity (Standard)	<b>2,540 LBS</b>	1,152 KG
Tire Capacity (Rugged Tow)	<b>2,830 LBS</b>	1,283 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>SINGLE</b>	SINGLE
Axle Rating (Per Axle)	<b>5,000 LBS</b>	2,268 KG
Hub	<b>6 LUG 5.5" PATTERN</b>	6 LUG 14 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,200 LBS</b>	544 KG
Winch	<b>1,800 LBS</b>	818 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>24"</b>	61 CM
Ball Towing Height (Rugged Tow)	<b>24"</b>	61 CM



## H210 & S215 TANDEM AXLE TRAILER

(Model #DO210MTT)

Length w/ Tongue	<b>24' 8"</b>	7.518 M
Length w/ Tongue Folded	<b>22'</b>	6.706 M
Width	<b>8' 6"</b>	2.59 M
Empty Weight w/spare	<b>1,196 LBS</b>	543 KG
Carrying Capacity	<b>5,804 LBS</b>	2,633 KG
GVWR (Gross Vehical Weight Rating)	<b>7,000 LBS</b>	3,175 KG
GAWR (Gross Axle Weight Rating)	<b>7,000 LBS</b>	3,175 KG
Tire Size / Range (Standard)	<b>ST 205/75D14 BIAS</b>	ST 205/75D14 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 215/75R14-C</b>	ST 215/75R14-C
Tire Pressure (Standard)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Pressure (Rugged Tow)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Capacity (Standard)	<b>1,760 LBS</b>	798 KG
Tire Capacity (Rugged Tow)	<b>1,870 LBS</b>	848 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>3,500 LBS</b>	1,588 KG
Hub	<b>5 LUG 4.5" PATTERN</b>	5 LUG 11CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>1,800 LBS</b>	818 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>21"</b>	53.3 CM
Ball Towing Height (Rugged Tow)	<b>22.5"</b>	57 CM



## H230/S235 TANDEM AXLE TRAILER

(Model #D0230MUT)

Boat & Trailer Length w/ Tongue	<b>23' 10"</b>	7.264 M
Boat & Trailer Length w/ Tongue Folded	<b>21' 2"</b>	6.452 M
Width	<b>8' 6"</b>	2.591 M
Trailer Empty Weight w/spare	<b>1,505 LBS</b>	683 KG
Carrying Capacity	<b>5,495 LBS</b>	2,493 KG
GVWR (Gross Vehical Weight Rating)	<b>7,000 LBS</b>	3,175 KG
GAWR (Gross Axle Weight Rating)	<b>7,000 LBS</b>	3,175 KG
Tire Size / Range (Standard)	<b>ST 205/75D14 BIAS</b>	ST 205/75D14 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 215/75R14-C</b>	ST 215/75R14-C
Tire Pressure (Standard)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Pressure (Rugged Tow)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Capacity	<b>1,760 LBS</b>	798 KG
Tire Capacity (Rugged Tow)	<b>1,870 LBS</b>	848 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>3,500</b>	1,588 KG
Hub	<b>5 LUG 4.5" PATTERN</b>	5 LUG 11CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>2,600 LBS</b>	1,179 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>21"</b>	53.3 CM
Ball Towing Height (Rugged Tow)	<b>22.5"</b>	57 CM



## H260 & S265 TANDEM AXLE TRAILER

(Model #D0260MYT)

Length w/ Tongue	<b>28'</b>	8.534 M
Length w/ Tongue Folded	<b>23' 4"</b>	7.112 M
Width	<b>8' 6"</b>	2.59 M
Empty Weight w/spare	<b>1,658 LBS</b>	752 KG
Carrying Capacity	<b>8,142 LBS</b>	3,693 KG
GVWR (Gross Vehical Weight Rating)	<b>9,800 LBS</b>	4,445 KG
GAWR (Gross Axle Weight Rating)	<b>10,000 LBS</b>	4,535 KG
Tire Size / Range (Standard)	<b>ST 225/75D15 BIAS</b>	ST 225/75D15 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 225/75R15-E</b>	ST 225/75R15-E
Tire Pressure (Standard)	<b>65 PSI COLD</b>	450 KPA COLD
Tire Pressure (Rugged Tow)	<b>80 PSI COLD</b>	550 KPA COLD
Tire Capacity (Standard)	<b>2,540 LBS</b>	1,152 KG
Tire Capacity (Rugged Tow)	<b>2,830 LBS</b>	1,283 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>5,000 LBS</b>	2,268 KG
Hub	<b>6 LUG 5.5" PATTERN</b>	6 LUG 14 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>2,600 LBS</b>	1,179 KG
Ball Size	<b>2 5/16"</b>	6 CM
Ball Towing Height	<b>24.5"</b>	62.23 CM
Ball Towing Height (Rugged Tow)	<b>24.5"</b>	62.23 CM





## SL222 TANDEM AXLE TRAILER

(Model #D0222SLT)

Length w/ Tongue	<b>22'10"</b>	6.96 M
Length w/ Tongue Folded	<b>20' 2"</b>	6.147 M
Width	<b>8'6"</b>	2.59 M
Empty Weight w/ spare	<b>1,256 LBS</b>	570 KG
Carrying Capacity	<b>5,744 LBS</b>	2,605 KG
GVWR (Gross Vehical Weight Rating)	<b>7,000 LBS</b>	3,175 KG
GAWR (Gross Axle Weight Rating)	<b>7,000 LBS</b>	3,175 KG
Tire Size / Range (Standard)	<b>ST 205/75D14 BIAS</b>	ST 205/75D14 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 215/75R14-C</b>	ST 215/75R14-C
Tire Pressure (Standard)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Pressure (Rugged Tow)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Capacity (Standard)	<b>1,760 LBS</b>	798 KG
Tire Capacity (Rugged Tow)	<b>1,870 LBS</b>	848 KG
Lug Nut Torque	<b>90 - 120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>3,500 LBS</b>	1,588 KG
Hub	<b>5 LUG 4.5" PATTERN</b>	5 LUG 11 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>1,800 LBS</b>	818 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>21"</b>	53.3 CM
Ball Towing Height (Rugged Tow)	<b>22.5"</b>	57 CM



## SL242 TANDEM AXLE TRAILER

(Model #DO242SLT)

Length w/ Tongue	<b>25' 5"</b>	7.75 M
Length w/ Tongue Folded	<b>20' 9"</b>	6.32 M
Width	<b>8' 6"</b>	2.59 M
Empty Weight w/ spare	<b>1,495 LBS</b>	678 KG
Carrying Capacity	<b>8,305 LBS</b>	3,767 KG
GVWR (Gross Vehical Weight Rating)	<b>9,800 LBS</b>	4,445 KG
GAWR (Gross Axle Weight Rating)	<b>10,000 LBS</b>	4,535 KG
Tire Size / Range (Standard)	<b>ST 225/75D15 BIAS</b>	ST 225/75D15 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 225/75R15-E</b>	ST 225/75R15-E
Tire Pressure (Standard)	<b>65 PSI COLD</b>	450 KPA COLD
Tire Pressure (Rugged Tow)	<b>80 PSI COLD</b>	550 KPA COLD
Tire Capacity (Standard)	<b>2,540 LBS</b>	1,152 KG
Tire Capacity (Rugged Tow)	<b>2,830 LBS</b>	1,283 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>5,000 LBS</b>	2,268 KG
Hub	<b>6 LUG 5.5" PATTERN</b>	6 LUG 14 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>2,600 LBS</b>	1,179 KG
Ball Size	<b>2 5/16"</b>	6 CM
Ball Towing Height	<b>24.5"</b>	62.23 CM
Ball Towing Height (Rugged Tow)	<b>24.5"</b>	62.23 CM



## SL262 TANDEM AXLE TRAILER

(Model #D0262SLT)

Length w/ Tongue	<b>25' 5"</b>	7.75 M
Length w/ Tongue Folded	<b>20' 9"</b>	6.32 M
Width	<b>8' 6"</b>	2.59 M
Empty Weight	<b>1,968 LBS</b>	893 KG
Carrying Capacity	<b>7,832 LBS</b>	3,553 KG
GVWR (Gross Vehical Weight Rating)	<b>9,800 LBS</b>	4,445 KG
GAWR (Gross Axle Weight Rating)	<b>10,000 LBS</b>	4,535 KG
Tire Size / Range (Standard)	<b>ST 225/75D15 BIAS</b>	ST 225/75D15 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 225/75R15-E</b>	ST 225/75R15-E
Tire Pressure (Standard)	<b>65 PSI COLD</b>	450 KPA COLD
Tire Pressure (Rugged Tow)	<b>80 PSI COLD</b>	550 KPA COLD
Tire Capacity (Standard)	<b>2,540 LBS</b>	1,152 KG
Tire Capacity (Rugged Tow)	<b>2,830 LBS</b>	1,283 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>5,000 LBS</b>	2,268 KG
Hub	<b>6 LUG 5.5" PATTERN</b>	6 LUG 14 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>2,600 LBS</b>	1,179 KG
Ball Size	<b>2 5/16"</b>	6 CM
Ball Towing Height	<b>24.5"</b>	62.23 CM
Ball Towing Height (Rugged Tow)	<b>24.5"</b>	62.23 CM



## F224 TANDEM AXLE TRAILER

(Model #D0224MT)

Length w/ Tongue	<b>23' 6"</b>	7.163 M
Length w/ Tongue Folded	<b>19' 10"</b>	6.35 M
Width	<b>8' 6"</b>	2.59 M
Empty Weight	<b>1,365 LBS</b>	619 KG
Carrying Capacity	<b>5,635 LBS</b>	2,556 KG
GVWR (Gross Vehical Weight Rating)	<b>7,000 LBS</b>	3,175 KG
GAWR (Gross Axle Weight Rating)	<b>7,000 LBS</b>	3,175 KG
Tire Size / Range (Standard)	<b>ST 205/75D14 BIAS</b>	ST 205/75D14 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 215/75R14-C</b>	ST 215/75R14-C
Tire Pressure (Standard)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Pressure (Rugged Tow)	<b>50 PSI COLD</b>	350 KPA COLD
Tire Capacity (Standard)	<b>1,760 LBS</b>	798 KG
Tire Capacity (Rugged Tow)	<b>1,870 LBS</b>	848 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>3,500 LBS</b>	1,588 KG
Hub	<b>5 LUG 4.5" PATTERN</b>	5 LUG 11CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>2,600 LBS</b>	1,179 KG
Ball Size	<b>2"</b>	5 CM
Ball Towing Height	<b>21"</b>	53.3 CM
Ball Towing Height (Rugged Tow)	<b>22.5"</b>	57 CM



## F244 TANDEM AXLE TRAILER




(Model #DO244NT)

Length w/ Tongue	<b>28' 1"</b>	8.56 M
Length w/ Tongue Folded	<b>23' 5"</b>	7.137 M
Width	<b>8' 6"</b>	2.59 M
Empty Weight w/ spare	<b>2,030 LBS</b>	921 KG
Carrying Capacity	<b>7,770 LBS</b>	3,524 KG
GVWR (Gross Vehical Weight Rating)	<b>9800 LBS</b>	4,445 KG
GAWR (Gross Axle Weight Rating)	<b>10,000 LBS</b>	4,535 KG
Tire Size / Range (Standard)	<b>ST 225/75D15 BIAS</b>	ST 225/75D15 BIAS
Tire Size / Range (Rugged Tow)	<b>ST 225/75R15-E</b>	ST 225/75R15-E
Tire Pressure (Standard)	<b>65 PSI COLD</b>	450 KPA COLD
Tire Pressure (Rugged Tow)	<b>80 PSI COLD</b>	550 KPA COLD
Tire Capacity (Standard)	<b>2,540 LBS</b>	1,152 KG
Tire Capacity (Rugged Tow)	<b>2,830 LBS</b>	1,283 KG
Lug Nut Torque	<b>90-120 FT/LBS</b>	120.6NM-162.8NM
Axle	<b>TANDEM</b>	TANDEM
Axle Rating (Per Axle)	<b>5,000 LBS</b>	2,268 KG
Hub	<b>6 LUG 5.5" PATTERN</b>	6 LUG 14 CM PATTERN
Wheel Type	<b>SILVER</b>	SILVER
Jack Capacity	<b>1,600 LBS</b>	726 KG
Winch	<b>2,600 LBS</b>	1,179 KG
Ball Size	<b>2 5/16"</b>	6 CM
Ball Towing Height	<b>24.5"</b>	62.23 CM
Ball Towing Height (Rugged Tow)	<b>24.5"</b>	62.23





## DIMENSIONAL DATA

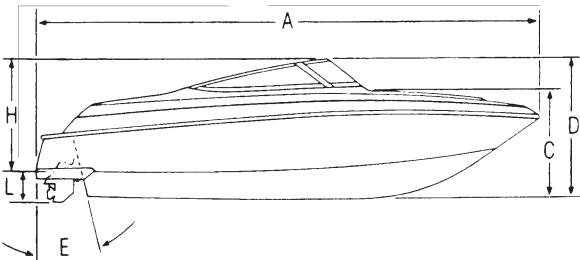

- A. LOA
- B. BEAM
- C. KEEL TO W/S SHELF
- D. TOTAL HEIGHT
- E. TRANSOM ANGLE
- F. DEAD RISE
- G. OB TRANSOM HEIGHT
- H. BRIDGE CLEARANCE
- I. COCKPIT HEIGHT
- J. COCKPIT
- STERN
- HEIGHT HELM
- K. FREEBOARD
- L. DRAFT



## WINNING EDGE DOMESTIC OWNER PROTECTION PLAN

### 2014 LIMITED WARRANTY FOUR WINNS FIBERGLASS BOATS AND TRAILERS

Rec Boat Holdings, LLC dba Four Winns ("Four Winns") warrants to you, the first North American retail purchaser of this 2014 model year Four Winns boat and/or trailer or a second North American retail purchaser as noted below ("you"), that it will repair or replace, at its sole discretion, defects in materials or workmanship that occur and are reported to Four Winns, or its factory authorized dealer, within the applicable limited warranty periods, subject to the terms, conditions and exclusions set forth below. Your acceptance of delivery of the warranted Four Winns boat and/or trailer constitutes your acceptance of the terms of this limited warranty. This limited warranty gives you specific legal rights and you may have other rights which may vary from state to state.

**This limited warranty is the sole and exclusive express warranty from Four Winns regarding your 2014 Four Winns boat and/or trailer and there are no express warranties which extend beyond those outlined in this limited warranty. There are no implied warranties from Four Winns, unless otherwise required under applicable law, and ALL IMPLIED WARRANTIES (INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) ARE EXCLUDED AND DISCLAIMED WHERE ALLOWED BY APPLICABLE LAW. ANY IMPLIED WARRANTIES (IF APPLICABLE) ARE LIMITED TO THE MINIMUM PERIOD OF TIME ALLOWED UNDER APPLICABLE LAW. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.**

#### Coverage Under This Limited Warranty

**Trailer Limited Warranty:** The limited warranty period runs for one (1) year for defects in trailer components, except as noted below.

**Exterior Cosmetic Gel Coat Limited Warranty:** The limited warranty period runs for one (1) year for defects in the boat's exterior cosmetic gel coat, including cracking, crazing, discoloring and fading, except as noted below.

**Non-Structural Parts and Components Limited Warranty:** The limited warranty period runs for one (1) year for defects in the boat's non-structural parts and components, except as noted below.

**Osmotic Hull Blister Limited Warranty:** The limited warranty period to the first North American retail purchaser runs for five (5) years, except as noted below, for osmotic Hull (defined below) blisters on the boat, which are defined as blisters larger than 1/8" diameter and with a depth of 1/16" or greater, which occur on the boat Hull below the waterline. This limited warranty is not transferrable to a second North American retail purchaser.

If the boat is bottom painted or left in water for more than sixty (60) days in any ninety (90) day period, this limited warranty will only apply if a marine barrier coating with proper surface preparation is applied to the boat Hull before it is bottom painted or left in water for more than sixty (60) days in any ninety (90) day period.

In the event of osmotic blistering, Four Winns must approve of any repairs, and their method and cost, before the repairs are performed, for this limited warranty to apply. Once any repairs are completed, a marine barrier coating will be applied to the affected Hull surface area(s).

Repairs under this osmotic Hull blister limited warranty are limited to one time. Any repair costs covered under this limited warranty are limited to labor and materials only. They will be paid on a prorated basis, according to the schedule outlined below. The repair costs cannot exceed \$150 (US) per foot of boat length prior to the prorating outlined on the next page:





Osmotic Hull blistering reported to Four Winns:	Amount of repair costs paid:
Less than two (2) years from date of delivery	100%
Two (2) to less than three (3) years from date of delivery	75%
Three (3) to less than four (4) years from date of delivery	50%
Four (4) to five (5) years from date of delivery	25%

**Structural Component Limited Warranty:** The limited warranty period to the first North American retail purchaser runs for the duration of the first North American retail purchaser's period of ownership for Structural Hull or Deck Defects (defined below), except as noted below. The limited warranty period to the second (if applicable) North American retail purchaser runs for ten (10) years for Structural Hull or Deck Defects, except as noted below. For purposes of this limited warranty, the "Hull" shall mean the single fiberglass molded shell and integral structural within the shell, including stringers, floorboards, transom and related structural reinforcements, all of which are below the Hull flange (i.e. gunwale) and the "Deck" shall mean the single fiberglass molded shell and integral fiberglass structural components above the Hull flange (i.e. gunwale). A "Structural Hull or Deck Defect" shall mean a substantial defect in the boat's Hull or Deck, which causes the boat to be unfit or unsafe for use as a pleasure craft under normal operating conditions.

The applicable limited warranty period, for both the First and Second (if applicable) North American retail purchasers, runs from the date of delivery of the boat and/or trailer to the first North American retail purchaser, provided that the boat and/or trailer is delivered to that purchaser within twelve (12) months from the date of its manufacture. For a boat and/or trailer delivered to that purchaser more than twelve (12) months after the date of its manufacture, the limited warranty period runs from the date of its manufacture, not from the date the boat and/or trailer was delivered to that purchaser. For a boat and/or trailer delivered to that purchaser more than twelve (12) months and up to thirty-six (36) months after its date of manufacture, the selling dealer will be required to submit a condition report on the boat and/or trailer with photos to Four Winns before delivery of the boat and/or trailer to that purchaser; Four Winns will then determine and advise what limited warranty coverage remains in effect on the boat and/or the trailer, if any. For a boat and/or trailer delivered to that purchaser more than thirty-six (36) months after the date of its manufacture, only the structural limited warranty on the boat will be in effect; all other limited warranties are voided. All limited warranties run concurrently.

Certain portions of this limited warranty, as noted above, extend only to the first North American retail purchaser. Other portions of this limited warranty, as noted above, may be transferred to a second North American retail purchaser, if the transfer occurs within five (5) years of the boat's and/or trailer's sale to the first North American retail purchaser, for a non-refundable recording fee of \$150 (US), for boats less than twenty (20) feet in length, or \$300 (US), for boats twenty (20) feet or more over in length, provided the second North American retail purchaser purchases the boat and/or trailer from the first North American retail purchaser or an authorized Four Winns dealer. To transfer the limited warranty, the second North American retail purchaser or the authorized Four Winns dealer must send to Four Winns, within fifteen (15) days of the boat's and/or trailer's purchase, at the address noted below, the: 1) first North American retail purchaser's plastic registration card, if available; 2) proof of the purchase; and 3) the non-refundable recording fee made payable to Rec Boat Holdings, LLC dba Four Winns. This limited warranty may only be transferred **once**. Four Winns will confirm all limited warranty transfers, in writing, to the authorized Four Winns dealer and/or second North American retail purchaser via email. Four Winns reserves the right to reject a limited warranty transfer request for a Four Winns boat and/or trailer that has been damaged, neglected or otherwise previously excluded from limited warranty coverage.

### **THIS LIMITED WARRANTY DOES NOT COVER**

1. A boat and/or trailer purchased from any party other than an authorized Four Winns dealer or the first North American retail purchaser.
2. A boat and/or trailer, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability, as determined by Four Winns, or a



- boat and/or trailer that has been salvaged, declared a total loss or a constructive total loss for any reason not covered in this limited warranty.
3. Any damage resulting from an accident or impact with another object or any damage caused by an act of nature.
  4. Damage, breakage and leakage around windshields, hatches or other designed openings.
  5. Boats or trailers that are damaged due to storage or exposure conditions including, but not limited to, sun or cold weather.
  6. Engines, power trains, outdrives, jet pumps, controls, propellers, batteries, appliances and other equipment, accessories or components that are not manufactured by Four Winns, whether or not they are warranted by other manufacturers. Note: it is the purchaser's responsibility to complete any limited warranty registration procedure that may be applicable to these components.
  7. Window glass, mirrors, varnish, paint, fabrics and chromium, stainless steel and other metal finishes.
  8. Gel coat fading or discoloration that occurs below or at the water line on the Hull.
  9. The original gel surface that has been altered in any way, including by repair, application of any coating other than marine barrier coating or marine barrier coating followed by bottom paint, improper surface preparation for paint or improper or excessive sanding, scraping or sandblasting.
  10. The cost of removal or re-instatement of parts or disassembly of units to repair or replace components covered by this limited warranty.
  11. A boat that has been overpowered, according to the boat's maximum recommended engine horsepower, or overloaded in excess of the maximum limits as stated on the U.S. Coast Guard Capacity Plate.
  12. Any boat and/or trailer that has been misused or used in a negligent manner; a boat that has been used for racing, speed or endurance contests; used for rental or charter; used for military, rescue, fire, safety, medical, police, law enforcement, patrol or similar government uses; used for commercial purposes; used without normal maintenance; operated contrary to any instruction furnished by Four Winns; improperly lifted or trailered; improperly secured to a trailer; or operated in violation of any federal, state, local, Coast Guard or other governmental agency laws, rules or regulations. Also, this limited warranty does not cover any damage to a boat resulting from failure to use a lower unit support device when transporting the boat.
  13. Estimated characteristics such as weight, speed, range, fuel consumption or other estimated performance characteristics.
  14. Dealer preparation, cleaning, final adjustments and alignments in preparing the boat and/or trailer for delivery.
  15. Fit and adjustment of exterior canvas tops, enclosures and weather covers or other soft goods.
  16. Sacrificial deterioration of anti-fouling paint or zinc anodes.
  17. Damage resulting from electrolysis or corrosion of any nature from any source.
  18. Any failure or defect arising from previous repairs made by a non-authorized service provider, unless preapproved by Four Winns.
  19. Any defect that results in the redesign of the Four Winns boat and/or trailer.
  20. Trailer tires, paint or Gatorhyde defects caused by fading, peeling, chipping, scratches or rusting attributed to normal use.

**THE SOLE AND EXCLUSIVE REMEDY UNDER THIS LIMITED WARRANTY AND ANY APPLICABLE IMPLIED WARRANTY IS THE REPAIR OR REPLACEMENT, AT FOUR WINNS' SOLE OPTION, OF WARRANTED PARTS AND COMPONENTS. FOUR WINNS EXCLUDES AND DISCLAIMS ANY**



LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF TIME, INCONVENIENCE, INSTALLMENT PAYMENTS, INSURANCE PAYMENTS, MARINA FEES, RETAIL CHARGES, TRAVEL EXPENSES, LOSS OF USE, HAUL OUT, LAUNCH, TOWING AND/OR STORAGE CHARGES, LOSS OF OR DAMAGE TO PERSONAL PROPERTY OR OTHER SIMILAR COSTS AND EXPENSES OR ANY CLAIM NOT SPECIFICALLY COVERED BY THIS LIMITED WARRANTY. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any legal action alleging breach of any applicable warranty coverage must be brought within one (1) year from the date the alleged breach first occurred or the shortest period allowed under applicable law, whichever is earlier.

### **PRE-DELIVERY SERVICE AND LIMITED WARRANTY REGISTRATION**

Prior to delivering a new Four Winns boat and/or trailer to the first North American retail purchaser, the authorized dealer is required to inspect and perform all necessary pre-delivery services including completing the "Pre-Delivery Service Record" portion of the limited warranty. Any cost associated with the pre-delivery inspection is the responsibility of the first North American retail purchaser. After completion of the necessary pre-delivery services, the first North American retail purchaser must sign the Four Winns limited warranty registration form and Pre-Delivery Service Record provided by the dealer, where indicated. No limited warranty coverage is applicable to the boat and/or trailer unless these forms are completed, signed and returned to Four Winns at the address indicated below, or via an authorized Four Winns dealer's online dealer extranet. All information received by Four Winns via the limited warranty registration or transfer process shall be the property of Four Winns, and submission of information, directly or indirectly, via the limited warranty registration process shall, to the extent permitted by applicable law, be deemed to constitute consent by the purchaser and dealer to Four Winns' use of such information at any time for all purposes allowed by law, including use of that information by third parties selected by Four Winns. You may opt to not have your personal information disclosed to third parties and/or to not receive marketing materials from Four Winns by sending a written request to: Four Winns Warranty Department, 925 Frisbie Street, Cadillac, MI 49601.

### **OBTAINING REPAIRS UNDER THIS LIMITED WARRANTY**

The authorized Four Winns dealer will carry out the limited warranty procedures on your behalf. All limited warranty work must be performed at an authorized dealer or a sublet repair facility chosen by an authorized dealer, at the Four Winns factory, or at another repair facility approved by Four Winns. You are responsible for the expense associated with transporting the boat and/or trailer to and from the repair facility. Four Winns must receive written notice of all limited warranty claims prior to the expiration of this limited warranty and be allowed an opportunity to resolve them.

To obtain limited warranty service, you must return the boat and/or trailer, including any alleged defective part, to an authorized Four Winns dealer and present the Owner's Registration Card. If necessary, you should call Four Winns for assistance to locate the nearest Four Winns dealer in your area. The following procedures will apply to a limited warranty claim:

- A. The dealer will contact and receive an authorization number from Four Winns for repairs.
- B. Upon completion of repairs, you must pay the dealer for non-covered items.
- C. You assume all liability for payment of non-authorized repairs.
- D. You must sign the Four Winns limited warranty claim form if the claim is not submitted through the Four Winns extranet by the dealer.

If sublet limited warranty repairs are required for any reason, the authorized Four Winns dealer will be responsible for choosing a qualified and reputable repair facility and the authorized **Four Winns Dealer will be responsible for all work performed by the sublet repair facility. Before referring any work to a sublet repair facility, the authorized Four Winns dealer must submit a written estimate to Four Winns' claims department to obtain written pre-authorization (including a claim authorization number).** Four Winns will not honor or pay for claims submitted for repairs by sublet repair facilities unless this procedure has been followed. Four Winns will not authorize or pay for sublet repairs initiated because of a lack of dealer service facilities.

This document contains the entire limited warranty provided by Four Winns. Any questions concerning the scope of this limited warranty should be directed to Four Winns. The terms and conditions contained in this limited warranty may not be modified, altered, or waived by any action, inaction or



representation, whether oral or in writing, except upon the express, written authority of a senior management level employee of Four Winns. Four Winns does not authorize any person or persons (except a senior management level employee of Four Winns), including Four Winns dealers, to change the terms of this limited warranty. (Note that your authorized Four Winns dealer is an independent business, authorized to sell and service Four Winns products, but is not an agent of Four Winns). Four Winns reserves the right to change or improve the design or manufacture of Four Winns boats and/or trailers without obligation to modify any boat and/or trailer previously manufactured.

**Four Winns**

925 Frisbie Street  
Cadillac, MI 49601

Telephone: (231) 775-1351



## WINNING EDGE INTERNATIONAL OWNER PROTECTION PLAN

### **2014 LIMITED WARRANTY** **FOUR WINNS FIBERGLASS BOATS AND TRAILERS**

Rec Boat Holdings, LLC dba Four Winns ("Four Winns") warrants to you, the first International retail purchaser of this 2014 model year Four Winns boat or a second International retail purchaser as noted below ("you"), that it will repair or replace, at its sole discretion, defects in materials or workmanship that occur and are reported to Four Winns, or its factory authorized dealer, within the applicable limited warranty periods, subject to the terms, conditions and exclusions set forth below. Your acceptance of delivery of the warranted Four Winns boat constitutes your acceptance of the terms of this limited warranty.

**This limited warranty is the sole and exclusive express warranty from Four Winns regarding your 2014 Four Winns boat, and there are no express warranties which extend beyond those outlined in this limited warranty. There are no implied warranties from Four Winns, unless otherwise required under applicable law, and ALL IMPLIED WARRANTIES (INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) ARE EXCLUDED AND DISCLAIMED WHERE ALLOWED BY APPLICABLE LAW. ANY IMPLIED WARRANTIES (IF APPLICABLE) ARE LIMITED TO THE MINIMUM PERIOD OF TIME ALLOWED UNDER APPLICABLE LAW.** Retail purchasers in the European Union (EU) may have legal rights under applicable national legislation and the Consumers Protective Directive 1999/44/EC of the European Parliament and of the Council of 25 May 1999, governing the sale of consumer goods, which are not affected by this limited warranty. Retail purchasers in other countries may also have legal rights which are not affected by this limited warranty.

#### **Coverage Under This Limited Warranty**

**Exterior Cosmetic Gel Coat Limited Warranty:** The limited warranty period runs for one (1) year for defects in the exterior cosmetic gel coat, including cracking, crazing, discoloring and fading, except as noted below.

**Non-Structural Parts And Components Limited Warranty:** The limited warranty period runs for one (1) year for defects in non-structural parts and components, except as noted below.

**Osmotic Hull Blister Limited Warranty:** The limited warranty period to the first International retail purchaser runs for five (5) years, except as noted below, for osmotic Hull (defined below) blisters on the boat, which are defined as blisters larger than 1/8" diameter and with a depth of 1/16" or greater, which occur on the boat Hull below the waterline. This limited warranty is not transferrable to a second International retail purchaser.

If the boat is bottom painted or left in water for more than sixty (60) days in any ninety (90) day period, this limited warranty will only apply if a marine barrier coating with proper surface preparation is applied to the boat Hull before it is bottom painted or left in water for more than sixty (60) days in any ninety (90) day period.

In the event of osmotic blistering, Four Winns must approve of any repairs, and their method and cost, before the repairs are performed, for this limited warranty to apply. Once any repairs are completed, a marine barrier coating will be applied to the affected Hull surface area(s).

Repairs under this osmotic Hull limited warranty are limited to one time. Any repair costs covered under this limited warranty are limited to labor and materials only. They will be paid on a prorated basis, according to the schedule outlined below. The repair costs cannot exceed \$150 (US) per foot of boat length prior to the prorating outlined below:

Osmotic Hull blistering reported to Four Winns:	Amount of repair costs paid:
Less than two (2) years from date of delivery	100%
Two (2) to less than three (3) years from date of delivery	75%
Three (3) to less than four (4) years from date of delivery	50%
Four (4) to five (5) years from date of delivery	25%



**Structural Hull or Deck Limited Warranty:** The limited warranty period to the first International retail purchaser runs for the duration of the first International retail purchaser's period of ownership for Structural Hull or Deck Defects (defined below), except as noted below. The limited warranty period to the second (if applicable) International retail purchaser runs for ten (10) years for Structural Hull or Deck Defects, except as noted below. For purposes of this limited warranty, the "Hull" shall mean the single fiberglass molded shell and integral structural within the shell, including stringers, floorboards, transom and related structural reinforcements, all of which are below the Hull flange (i.e. gunwale) and the "Deck" shall mean the single fiberglass molded shell and integral fiberglass structural components above the Hull flange (i.e. gunwale). A "Structural Hull or Deck Defect" shall mean a substantial defect in the boat's Hull or Deck, which causes the boat to be unfit or unsafe for use as a pleasure craft under normal operating conditions.

The applicable limited warranty period for both the first and second International retail purchaser runs from the date of delivery of the boat to the first International retail purchaser, provided that the boat is delivered to that purchaser within twelve (12) months from the date of its manufacture. For a boat delivered to that purchaser more than twelve (12) months after the date of its manufacture, the limited warranty period runs from the date of its manufacture, not from the date the boat was delivered to that purchaser. For a boat delivered to that purchaser more than twelve (12) months and up to thirty-six (36) months after its date of manufacture, the selling dealer will be required to submit a condition report on the boat with photos to Four Winns before delivery of the boat to the first International retail purchaser; Four Winns will then determine and advise what limited warranty coverage remains in effect on the boat, if any. For a boat delivered to that purchaser more than thirty-six (36) months after the date of its manufacture, only the structural limited warranty on the boat will be in effect; all other limited warranties are voided. All limited warranties run concurrently.

Certain portions of this limited warranty, as noted above, extend only to the first International retail purchaser. Other portions of this limited warranty, as noted above, may be transferred to a second International retail purchaser, if the transfer occurs within five (5) years of the boat's sale to the first International retail purchaser, for a non-refundable recording fee of \$150 (US), for boats less than twenty (20) feet in length, or \$300 (US), for boats twenty (20) feet or more in length, provided the second International retail purchaser purchases the boat from the first International retail purchaser or an authorized Four Winns dealer. To transfer the limited warranty, the second International retail purchaser or the authorized Four Winns dealer must send to Four Winns, within fifteen (15) days of the boat's purchase, at the address noted below, the: 1) first International retail purchaser's plastic registration card, if available; 2) proof of the purchase; and 3) the non-refundable recording fee made payable to Rec Boat Holdings, LLC dba Four Winns. This limited warranty may only be transferred once. Four Winns will confirm all limited warranty transfers, in writing, to the authorized Four Winns dealer and/or second International retail purchaser via email. Four Winns reserves the right to reject a limited warranty transfer request for a Four Winns boat that has been damaged, neglected or otherwise previously excluded from limited warranty coverage.

#### **THIS LIMITED WARRANTY DOES NOT COVER**

1. A boat purchased from any party other than an authorized Four Winns dealer or the first International retail purchaser.
2. A boat, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability, as determined by Four Winns, or a boat that has been salvaged, declared a total loss or a constructive total loss for any reason not covered in this limited warranty, and/or trailer that has been salvaged, declared a total loss or a constructive total loss for any reason not covered in this limited warranty.
3. Any damage resulting from an accident or impact with another object or any damage caused by an act of nature.
4. Damage, breakage and leakage around windshields, hatches or other designed openings.
5. Boats that are damaged due to storage or exposure conditions including, but not limited to, sun or cold weather.



6. Engines, power trains, outdrives, jet pumps, controls, propellers, batteries, appliances and other equipment, accessories or components that are not manufactured by Four Winns, whether or not they are warranted by other manufacturers. Note: it is the purchaser's responsibility to complete any limited warranty registration procedure that may be applicable to these components.
7. Window glass, mirrors, varnish, paint, fabrics and chromium, stainless steel and other metal finishes.
8. Gel coat fading or discoloration that occurs below or at the water line on the Hull.
9. The original gel surface that has been altered in any way, including by repair, application of any coating other than marine barrier coating or marine barrier coating followed by bottom paint, improper surface preparation for paint or improper or excessive sanding, scraping or sandblasting.
10. The cost of removal or re-instatement of parts or disassembly of units to repair or replace components covered by this limited warranty.
11. A boat that has been overpowered, according to the boat's maximum recommended engine horsepower, or overloaded in excess of the maximum limits as stated on the Capacity Plate (if applicable).
12. Any boat that has been misused or used in a negligent manner; that has been used for racing, speed or endurance contests; used for rental or charter; used for military, rescue, fire, safety, medical, police, law enforcement, patrol or similar government uses; used for commercial purposes; used without normal maintenance; operated contrary to any instruction furnished by Four Winns; improperly lifted or trailered; improperly secured to a trailer; or operated in violation of any federal, state, local, or other governmental agency laws, rules or regulations. Also, this limited warranty does not cover any damage to a boat resulting from failure to use a lower unit support device when transporting the boat.
13. Estimated characteristics such as weight, speed, range, fuel consumption or other estimated performance characteristics.
14. Dealer preparation, cleaning, final adjustments and alignments in preparing the boat for delivery.
15. Fit and adjustment of exterior canvas tops, enclosures and weather covers or other soft goods.
16. Sacrificial deterioration of anti-fouling paint or zinc anodes.
17. Damage resulting from electrolysis or corrosion of any nature from any source.
18. Any failure or defect arising from previous repairs made by a non-authorized service provider, unless preapproved by Four Winns.
19. Any defect that results in the redesign of the Four Winns boat.
20. Trailers.

**THE SOLE AND EXCLUSIVE REMEDY UNDER THIS LIMITED WARRANTY AND ANY APPLICABLE IMPLIED WARRANTY IS THE REPAIR OR REPLACEMENT, AT FOUR WINNS' SOLE OPTION, OF WARRANTED PARTS AND COMPONENTS. FOUR WINNS EXCLUDES AND DISCLAIMS ANY LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF TIME, INCONVENIENCE, INSTALLMENT PAYMENTS, INSURANCE PAYMENTS, MARINA FEES, RETAIL CHARGES, TRAVEL EXPENSES, LOSS OF USE, HAUL OUT, LAUNCH, TOWING AND/OR STORAGE CHARGES, LOSS OF OR DAMAGE TO PERSONAL PROPERTY OR OTHER SIMILAR COSTS AND EXPENSES OR ANY CLAIM NOT SPECIFICALLY COVERED BY THIS LIMITED WARRANTY. Any legal action alleging breach of any applicable warranty coverage must be brought within one (1) year from the date the alleged breach first occurred or the shortest period of time allowed under applicable law. Any claim by a retail purchaser in the EU that the boat was nonconforming at the time of delivery must be made within two (2) years from the date of delivery.**



## **PRE-DELIVERY SERVICE AND LIMITED WARRANTY REGISTRATION**

Prior to delivering a new Four Winns boat to the first International retail purchaser, the authorized dealer is required to inspect and perform all necessary pre-delivery services including completing the "Pre-Delivery Service Record" portion of the limited warranty. Any cost associated with the pre-delivery inspection is the responsibility of the first International retail purchaser. After completion of the necessary pre-delivery services, the first International retail purchaser must sign the Four Winns limited warranty registration form and Pre-Delivery Service Record provided by the dealer, where indicated. No limited warranty coverage is applicable to the boat unless these forms are completed, signed and returned to Four Winns at the address indicated below, or via an authorized Four Winns dealer's online dealer extranet. All information received by Four Winns via the limited warranty registration or transfer process shall be the property of Four Winns, and submission of information, directly or indirectly, via the limited warranty registration process shall, to the extent permitted by applicable law, be deemed to constitute consent by the purchaser and dealer to Four Winns' use of such information at any time for all purposes allowed by law, including use of that information by third parties selected by Four Winns. You may opt to not have your personal information disclosed to third parties and/or to not receive marketing materials from Four Winns by sending a written request to: Four Winns Warranty Department, 925 Frisbie Street, Cadillac, MI 49601.

## **OBTAINING REPAIRS UNDER THIS LIMITED WARRANTY**

The authorized Four Winns dealer will carry out the limited warranty procedures on your behalf. All limited warranty work must be performed at an authorized dealer or a sublet repair facility chosen by an authorized dealer, at the Four Winns factory, or at another repair facility approved by Four Winns. You are responsible for the expense associated with transporting the boat to and from the repair facility. Four Winns must receive written notice of all limited warranty claims prior to the expiration of this limited warranty and be allowed an opportunity to resolve them.

To obtain limited warranty service, you must return the boat, including any alleged defective part, to an authorized Four Winns dealer and present the Owner's Registration Card. If necessary, you should call Four Winns for assistance to locate the nearest Four Winns dealer in your area. The following procedures will apply to a warranty claim:

- A. The dealer will contact and receive an authorization number from Four Winns for repairs.
- B. Upon completion of repairs, you must pay the dealer for non-covered items.
- C. You assume all liability for payment of non-authorized repairs.
- D. You must sign the Four Winns limited warranty claim form if the claim is not submitted through the Four Winns extranet by the dealer.

If sublet limited warranty repairs are required for any reason, the authorized Four Winns dealer will be responsible for choosing a qualified and reputable repair facility and the authorized **Four Winns Dealer will be responsible for all work performed by the sublet repair facility. Before referring any work to a sublet repair facility, the authorized Four Winns dealer must submit a written estimate to Four Winns' claims department to obtain written pre-authorization (including a claim authorization number).** Four Winns will not honor or pay for claims submitted for repairs by sublet repair facilities unless this procedure has been followed. Four Winns will not authorize or pay for sublet repairs initiated because of a lack of dealer service facilities.

This document contains the entire limited warranty provided by Four Winns. Any questions concerning the scope of this limited warranty should be directed to Four Winns. The terms and conditions contained in this limited warranty may not be modified, altered, or waived by any action, inaction or representation, whether oral or in writing, except upon the express, written authority of a senior management level employee of Four Winns. Four Winns does not authorize any person or persons (except a senior management level employee of Four Winns), including Four Winns dealers, to change the terms of this limited warranty. (Note that your authorized Four Winns dealer is an independent business, authorized to sell and service Four Winns products, but is not an agent of Four Winns). Four Winns reserves the right to change or improve the design or manufacture of Four Winns boats and/or trailers without obligation to modify any boat and/or trailer previously manufactured.

**Four Winns**  
925 Frisbie Street  
Cadillac, MI 49601

Telephone: (231) 775-1351







925 FRISBIE STREET • CADILLAC, MI 49601  
231-775-1351

[www.fourwinns.com](http://www.fourwinns.com)

PART # 090-2527-14