



TABLE OF CONTENTS

SPORTBOATS	PAGES
180 Freedom	2, 3
190 Horizon	6, 7
200 Horizon	8, 9
220 Horizon	10, 11
DECK BOATS	
180 Candia	14, 15
200 Candia	16, 17
CUDDYS	
195 Sundowner	20, 21
205 Sundowner	22, 23
225 Sundowner	24, 25
255 Sundowner	26, 27
TRAILERABLE CRUISERS	
235 Vista	30, 31, 32
265 Vista	34, 35, 36
WIDE-BODY CRUISERS	
285	38, 39, 40, 41
315	42, 43, 44, 45
325	46, 47, 48
365	50, 51
PERFORMANCE	
201 Liberator	54, 55
221 Liberator	56, 57
251 Liberator	58, 59
QUEST	
187 Quest	62, 63
207 Quest	64, 65
217 Quest	66, 67
237 Quest	68, 69
257 Quest	70, 71
TRAILER SPECIFICATIONS	
Freedom	74
Horizon	76
Candia	78
Sundowner	80
Vista	82
Liberator	84
Quest	86
OB SPECIFICATIONS	88, 89
I/O SPECIFICATIONS	90, 91
DIMENSIONAL DATA	92
WINNING EDGE	94

180 FREEDOM

Specifications*

LOA/Transom to Bow:	18'6"/17'1"
Beam:	7'3"
Keel to W/S Shelf:	40"
Total Height:	54"
Transom Angle:	13°
Deadrise:	18°
OB Transom Height:	20"
Bridge Clearance:	3'8"
Cockpit Height (stern):	26½"
Cockpit Height (helm):	27½"
Freeboard (min.):	(I/O) 25" (OB) 27"
Draft (drive down):	(I/O) 26" (OB) 24"
Fuel (gal.):	18
Passengers:	(I/O) 7 (OB) 6
Maximum Capacity (lbs.):	(I/O) 1050 (OB) 1600

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
90 TL* /V-4 (OB)	NA	90	1790
120 TL* /V-4 (OB)	NA	120	1850
3.0L/L-4 (I/O)	130	115	2130
4.3L/V-6 (I/O)	175	150	2280

*(OB) Johnson® or Evinrude® TL includes power tilt, trim & VRO^{2™}.
NA = Not applicable

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
180F I/O	3.0L	1480	650	40	110	150	580
180F OB	90TL	1490	300	40	110	150	580



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
90 TL/90	13¼ x 17	AL	39-41	80
120 TL/120	13¼ x 17	AL	42-45	70
3.0L/130/115	14½ x 19	AL	40-42	80
4.3L/175/150	14¼ x 21	AL	46-49	70

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Anchor, with line • Canvas, aft • Canvas, cockpit cover • Canvas, forward • Canvas, full • Canvas, mooring cover • Canvas, sides • Canvas, walk-through curtain • Fish & ski package (OB) | <ul style="list-style-type: none"> • Flush out kit (I/O) • Oil drip pan • Prop, high alt./heavy load • Prop, stainless steel (exchange) • SS (sun sport) interior (I/O) • Seating, bow fill-in cushions • Seating, pedestal • Seating, stern couch (SS) • Ski pylon (OB) • Two-tone gelcoat | <p>Trailer Options:</p> <ul style="list-style-type: none"> • Brakes • Charcoal trailer (exchange) • Chrome wheels (exchange) • Galvanized trailer • Spare tire & wheel, white • Spare tire & wheel, chrome/galvanized • Spare tire cover |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Fish & Ski package includes: Pedestal seat, ski pylon & trolling motor

190 HORIZON

Specifications*

LOA/Transom to Bow:	(I/O) 19'8"/18'3" (OB) 20'1"
Beam:	7'3"
Keel to W/S Shelf:	45"
Total Height:	58"
Transom Angle:	13°
Deadrise:	18°
OB Transom Height:	25"
Bridge Clearance:	3'8"
Cockpit Height (stern):	28"
Cockpit Height (helm):	29"
Freeboard (min.):	(I/O) 29" (OB) 31"
Draft (drive down):	(I/O) 30" (OB) 27"
Fuel (gal.):	32
Passengers:	8
Maximum Capacity (lbs.):	(I/O) 1260 (OB) 1900

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
120 TX/V-4 (OB)	NA	120	2320
150 EX/V-6 (OB)	NA	150	2310
4.3L/V-6 (I/O)	175	150	2640
5.0L-HO/V-8 (I/O)	200	175	2740

NA = Not applicable

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
190H I/O	4.3L	1830	810	50	190	150	620
190H OB	120TX	1950	370	50	190	150	620



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
120 TX/120	13¼ x 17	AL	40-43	120
150 EX/150	14½ x 19	AL	45-48	120
4.3L/175/150	14½ x 19	AL	41-44	120
5.0L-HO/200/175	14¼ x 21	AL	46-49	120

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

<ul style="list-style-type: none"> • Anchor w/line • Automatic bilge pump • Canvas, aft • Canvas, cockpit cover • Canvas, forward • Canvas, full • Canvas, mooring cover • Canvas, sides • Canvas, walk-through curtain • 12V DC receptacle • Cockpit grab handles • Compass • Depth sounder • Dual battery switch • Fiberglass floor liner w/fiberglass seat box, engine cover • Flip-up engine box table • Flush out kit (I/O) • Halon fireboy (I/O) • Hour meter (I/O) • Lights, courtesy • Oil drip pan • Prop, high alt./ heavy load 	<ul style="list-style-type: none"> • Prop, stainless steel (exchange) • SS (sun sport) interior (I/O) • Seating, bow fill-in cushion • Seating, bucket, both (std. SS) • Seating, bucket, starboard • Seating, port adjuster • Seating, stern couch • Seating, wrap-around couch fill-in cushions (OB) • Ski pylon (OB) • SLX I Package • SLX II Package • Snap-in carpet • Steering, hydraulic (OB) • Stereo upgrade • Swim platform teak insert (I/O) • Table w/extra mount • Tilt steering • Transom washdown & shower (SS) • Two-tone gel coat • Windshield wiper, starboard 	<p>Trailer Options</p> <ul style="list-style-type: none"> • Brakes, one axle • Chrome wheels • Galvanized trailer • Spare tire & wheel, white • Spare tire & wheel, chrome/galvanized • Spare tire cover
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SLX Packages include: Automatic bilge switch, bow fill-in cushions, 12V DC dash receptacle, depth sounder, grab assist handles, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated canvas cockpit cover, forward cover.

SLX II includes: Color-coordinated full canvas (forward, aft, side).

200 HORIZON/ HORIZON CONVERTIBLE

Specifications*

LOA/Transom to Bow:	20'9"/19'4"
Beam:	7'8"
Keel to W/S Shelf:	50"
Total Height:	65"
Transom Angle:	14°
Deadrise:	21°
OB Transom Height:	25"
Bridge Clearance:	3'11"
Cockpit Height (stern):	29"
Cockpit Height (helm):	33½"
Freeboard (min.):	(I/O) 33" (OB) 35"
Draft (drive down):	(I/O) 34" (OB) 32"
Fuel (gal.):	44
Passengers:	10 (Convertible) 6
Maximum Capacity (lbs.):	(I/O) 1510 (OB) 2270

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
150 EX/V-6 (OB)	NA	150	2440
175 EX/V-6 (OB)	NA	175	2440
4.3L/V-6 (I/O)	175	150	2870
5.0L-HO/V-8 (I/O)	200	175	2970
5.8L/V-8 (I/O)	240	215	3040
351 CI/V-8 (I/O)	285	245	3140

NA = Not applicable

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
200H I/O	5.0L-HO	2060	910	50	260	150	980
200H OB	150 EX	2080	360	50	260	150	980



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
150 EX/150	14½ x 19	AL	43-46	140
175 EX/175	14½ x 19	AL	47-50	130
4.3L/175/150	15 x 17	AL	39-42	160
5.0L-HO/200/175	14½ x 19	AL	44-47	150
5.8L/240/215	14½ x 19	AL	47-50	140
351CI/285/245	14½ x 19	AL	50-53	140

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- Anchor w/line
- Automatic bilge pump
- Canvas, aft
- Canvas, cockpit cover
- Canvas, forward
- Canvas, full
- Canvas, mooring cover
- Canvas, sides
- Canvas, walk-through curtain
- 12V DC receptacle
- Cockpit grab handles
- Compass
- Depth sounder
- Dual battery switch
- Fiberglass floor liner w/fiberglass seat box, engine cover
- Flip-up engine box table
- Flush out kit (I/O)
- Halon fireboy (I/O)
- Hour meter (I/O)
- Lights, courtesy
- Oil drip pan
- Prop, high alt./heavy load
- Prop, stainless steel (exchange)
- SS (sun sport) interior (I/O)
- Seating, bow fill-in cushion
- Seating, bucket, both
- Seating, bucket, starboard
- Seating, bucket & fishwell
- Seating, port adjuster (std. SS)
- Seating, wrap-around couch fill-in cushions (OB)
- Ski pylon (OB)
- SLX Package I
- SLX Package II
- Snap-in carpet
- Steering, hydraulic (OB)
- Stereo upgrade
- Swim platform, teak insert (I/O)
- Table w/extra mount
- Tilt steering
- Transom washdown & shower (SS)
- Two-tone gelcoat
- Windshield wiper, starboard

Trailer Options

- Trailer, tandem axle
- Brakes
- Chrome wheels
- Galvanized trailer
- Spare tire and wheel, white
- Spare tire and wheel, chrome/galvanized
- Spare tire cover

SLX Packages include: Automatic bilge switch, bow fill-in cushions, 12V DC dash receptacle, depth sounder, grab assist handles, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated canvas cockpit cover, forward cover.

SLX II includes: Color-coordinated full canvas (forward, aft, side).

220 HORIZON

Specifications*

LOA/Transom to Bow:	23'3"/21'8"
Beam:	8'4"
Keel to W/S Shelf:	54"
Total Height:	70"
Transom Angle:	15°
Deadrise:	21°
Bridge Clearance:	4'6"
Cockpit Height (stern):	31"
Cockpit Height (helm):	34"
Freeboard (min.):	36"
Draft (drive down):	35"
Fuel (gal.):	65
Passengers:	10
Maximum Capacity (lbs.):	2410

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
5.8L/V-8	240	215	3580
351CI/V-8	285	245	3680
454CI/V-8	330	275	3760

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
220H	5.8L	2600	980	50	390	150	1200



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
5.8L/240/215	15 x 17	AL	44-47	180
351CI/285/245	15 x 17	AL	47-50	180
454CI/330/275	14½ x 19	AL	51-54	160

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- Anchor w/line
- Automatic bilge pump
- Canvas, aft
- Canvas, bow canopy
- Canvas, camper
- Canvas, cockpit cover
- Canvas, forward
- Canvas, full
- Canvas, mooring cover
- Canvas, sides
- Canvas, walk-through curtain
- 12V DC receptacle
- Cockpit grab handles
- Compass
- Depth sounder
- Dual battery switch
- Fiberglass floor liner w/fiberglass seat box, engine cover
- Flip-up engine box table
- Flush out kit
- Halon fireboy
- Head: portable
- Hour meter
- Lights, courtesy
- Oil drip pan
- Prop, high alt./ heavy load
- Prop, stainless steel (exchange)
- SS (sun sport) interior
- Seating, bow fill-in cushion
- Seating, bucket, both
- Seating, bucket, starboard
- Seating, bucket & fishwell
- Seating, port adjuster
- Seating, stern couch
- SLX Package I
- SLX Package II
- SLX Package III
- Snap-in carpet
- Stereo upgrade
- Swim platform teak insert
- Table w/extra mount
- Tilt steering
- Transom washdown & shower (SS)
- Trim tabs
- Two-tone gelcoat
- Windshield wiper, starboard

Trailer Options

- Brakes, two axles
- Chrome wheels
- Galvanized trailer
- Spare tire and wheel, white
- Spare tire and wheel, chrome/galvanized
- Spare tire cover

SLX packages include: Automatic bilge switch, bow fill-in cushions, 12V DC dash receptacle, depth sounder, grab assist handles, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated canvas cockpit cover, forward cover.

SLX II includes: Color-coordinated full canvas (forward, aft, side).

SLX III includes: Color-coordinated camper canvas (forward, aft, side).

180 CANDIA

Specifications*

LOA/Transom to Bow:	19'8"/18'1"
Beam:	7'8"
Keel to W/S Shelf:	45"
Total Height:	61"
Transom Angle:	12°
Deadrise:	19°
Bridge Clearance:	3'9"
Cockpit Height (stern):	31½"
Cockpit Height (helm):	31"
Freeboard (min.):	30"
Draft (drive down):	26"
Fuel (gal.):	32
Passengers:	10
Maximum Capacity (lbs.):	1600

*Dimensional diagram is located on page 92.

Power Rating & Weights (Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
3.0L/L-4	130	115	2700
4.3L/V-6	175	150	2860
5.0L-HO/V-8	200	175	2960

NA = Not applicable

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
180C	4.3L	2050	810	50	190	150	700



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
3.0L/130/115	15½ x 15	AL	29-32	125
4.3L/175/150	15 x 17	AL	39-41	120
5.0L-HO/200/175	14¼ x 21	AL	43-46	115

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Anchor w/line • Automatic bilge pump • Canvas, mooring cover • 12V DC receptacle • Cockpit grab handles • Compass • Depth sounder • Dual battery switch • Flush out kit • Grey water system • Halon fireboy • Hour meter • Lights, courtesy • Oil drip pan • Prop, high alt./heavy load | <ul style="list-style-type: none"> • Prop, stainless steel (exchange) • SS (sun sport) interior • Seating, bow fill-in cushions • Seating, stern couch (SS) • SLX Package • Stereo upgrade • Swim platform, teak insert • Table w/extra mount • Tilt steering • Transom washdown & shower (SS) • Two-tone gelcoat • Windshield, console • Windshield, venturi | <ul style="list-style-type: none"> Trailer Options • Brakes, one axle • Chrome wheels • Galvanized trailer • Spare tire and wheel, white • Spare tire and wheel, chrome/galvanized • Spare tire cover |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

SLX Package includes: Automatic bilge switch, bow fill-in cushions, 12V DC dash receptacle, depth sounder, courtesy lights, stereo upgrade and tilt steering.

200 CANDIA

Specifications*

LOA/Transom to Bow:	21'7"/20'
Beam:	8'
Keel to W/S Shelf:	43"
Total Height:	58"
Transom Angle:	12°
Deadrise:	19°
Bridge Clearance:	3'9"
Cockpit Height (stern):	31"
Cockpit Height (helm):	31"
Freeboard (min.):	30"
Draft (drive down):	28"
Fuel (gal.):	32
Passengers:	13
Maximum Capacity (lbs.):	1805

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
4.3L/V-6	175	150	3000
5.0L-HO / V-8	200	175	3100
5.8L/V-8	240	215	3170
351CI/V-8	285	245	3270

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
200C	5.8L	2180	980	50	190	150	1150



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
4.3L/175/150	15 x 17	AL	37-40	110
5.0L-HO/200/175	14½ x 19	AL	41-43	105
5.8L/240/215	14½ x 19	AL	44-47	100
351CI/285/245	14½ x 19	AL	48-51	100

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Anchor w/line • Automatic bilge pump • Canvas, mooring cover • 12V DC receptacle • Cockpit grab handles • Compass • Depth sounder • Dual battery switch • Flush out kit • Grey water system • Halon fireboy • Hour meter • Lights, courtesy • Oil drip pan | <ul style="list-style-type: none"> • Prop, high alt./heavy load • Prop, stainless steel (exchange) • SS (Sun Sport) interior • Seating, bow fill-in cushions • Seating, stern couch (SS) • SLX Package • Stereo upgrade • Swim platform, teak insert • Table w/extra mount • Tilt steering • Transom washdown & shower (SS) • Two-tone gelcoat • Windshield, console • Windshield, venturi | <p>Trailer Options</p> <ul style="list-style-type: none"> • Brakes, one axle • Brakes, two axles • Chrome wheels • Galvanized trailer • Spare tire and wheel, white • Spare tire and wheel chrome/galvanized • Spare tire cover |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

SLX Package includes: Automatic bilge switch, bow fill-in cushions, 12V DC dash receptacle, depth sounder, courtesy lights, stereo upgrade and tilt steering



195 SUNDOWNER

Specifications*

LOA/Transom to Bow:	(I/O) 19'8"/18'3" (OB) 20'1"
Beam:	7'3"
Keel to W/S Shelf:	55"
Total Height:	69"
Transom Angle:	13°
Deadrise:	18°
OB Transom Height:	25"
Bridge Clearance:	4'7"
Cockpit Height (stern):	29"
Cockpit Height (helm):	35"
Freeboard (min.):	(I/O) 32" (OB) 34"
Draft (drive down):	(I/O) 30" (OB) 27"
Fuel (gal.):	32
Passengers:	8
Maximum Capacity (lbs.):	(I/O) 1300 (OB) 1970

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
120 TX/V-4 (OB)	NA	120	2630
150 EX/V-6 (OB)	NA	150	2620
4.3L/V-6 (I/O)	175	150	2920

NA = Not applicable

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
195S I/O	4.3L	2110	810	50	190	150	620
195S OB	120 TX	2260	370	50	190	150	620



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
120 TX/120	13¼ x 17	AL	39-42	120
150 EX/150	14½ x 19	AL	43-46	110
4.3L/175/150	14½ x 19	AL	41-44	120

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Anchor with line • Canvas, aft • Canvas, cockpit cover • Canvas, full • Canvas, mooring cover • Canvas, sides • Cockpit grab handles • Compass • 12V DC receptacle • Depth sounder • Dual battery switch • Fiberglass floor liner w/fiberglass seat boxd, engine cover • Flush out kit (I/O) • Halon fireboy (I/O) • Hatch screen • Head, portable • Head, pump out • Hour meter (I/O) • Lights, courtesy • Oil drip pan | <ul style="list-style-type: none"> • Prop, high alt./heavy load • Prop, stainless steel (exchange) • SS (sun sport) interior (I/O) • Seating, bucket, both • Seating, bucket, stbd. • Seating, stern couch (SS) • Seating, wrap-around couch fill-in cushions (OB) • SLX Package I • SLX Package II • SLX Package III • Snap-in carpet • Steering, hydraulic (OB) • Stereo upgrade • Swim platform, teak insert (I/O) • Table w/extra mount • Tilt steering • Two-tone gelcoat • Windshield walk-through • Windshield wiper, stbd. | <p>Trailer Options:</p> <ul style="list-style-type: none"> • Brakes • Charcoal trailer (exchange) • Chrome wheels (exchange) • Galvanized trailer • Spare tire & wheel, white • Spare tire & wheel, chrome/galvanized • Spare tire cover |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

SLX Packages include: 12V DC dash receptacle, depth sounder, grab assist handles, hatch screen, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated cockpit cover.

SLX II includes: Color-coordinated full canvas (aft, side).

SLX III includes: Color-coordinated camper canvas (aft, side).

205 SUNDOWNER

Specifications*

LOA/Transom to Bow:	20'9"/19'4"
Beam:	7'8"
Keel to W/S Shelf:	55"
Total Height:	69"
Transom Angle:	14°
Deadrise:	21°
OB Transom Height:	25"
Bridge Clearance:	4'
Cockpit Height (stern):	32"
Cockpit Height (helm):	38"
Freeboard (min.):	(I/O) 38" (OB) 39"
Draft (drive down):	(I/O) 35" (OB) 34"
Fuel (gal.):	44
Passengers:	10
Maximum Capacity (lbs.):	(I/O) 1470 (OB) 2185

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
150 EX/V-6	NA	150	2670
175 EX/V-6	NA	175	2670
4.3L/V-6	175	150	3120
5.0L-HO/V-8	200	175	3220
5.8L/V-8	240	215	3290
351CI/V-8	285	245	3390

NA = Not applicable

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
205S	150 EX	2310	360	50	260	150	1070
205S	5.0L-HO	2310	910	50	260	150	1070



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
150 EX/150	15 x 17	AL	41-44	140
175 EX/175	14½ x 19	AL	45-48	130
4.3L/175/150	15 x 17	AL	38-41	150
5.0L-HO/200/175	14½ x 19	AL	43-46	145
5.8L/240/215	14½ x 19	AL	46-49	140
351CI/285/245	14½ x 19	AL	49-52	140

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Anchor w/line • Canvas, aft • Canvas, camper • Canvas, cockpit cover • Canvas, full • Canvas, mooring cover • Canvas, sides • 12V DC receptacle • Cockpit grab handles • Compass • Depth sounder • Dual battery switch • Fiberglass floor liner w/fiberglass seat box, engine cover • Flip-up engine box table • Flush out kit (I/O) • Halon fireboy • Hatch screen • Head, portable • Head, pump out • Horn, dual trumpet • Hour meter (I/O) | <ul style="list-style-type: none"> • Lights, courtesy • Oil drip pan • Prop, high alt./heavy load • Prop, stainless steel (exchange) • SS (sun sport) interior • Seating, bucket, both • Seating, bucket, stbd. • Seating, bucket & fishwell • Seating, port adjuster • Seating, stern couch • Seating, wraparound stern couch fill-in cushions (OB) • SLX Package I • SLX Package II • SLX Package III • Snap-in carpet • Step access to standard walk-thru windshield • Steering, hydraulic (OB) • Stereo upgrade • Swim platform teak insert (I/O) | <ul style="list-style-type: none"> • Table • Table w/extra mount • Tilt steering • Transom washdown & shower (SS) • Two-tone gelcoat • Windshield wiper, starboard <p>Trailer Options</p> <ul style="list-style-type: none"> • Brakes, one axle • Brakes, two axles • Chrome wheels (tandem) • Galvanized trailer • Spare tire and wheel, white • Spare tire and wheel, chrome/galvanized • Spare tire cover |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

SLX Packages include: 12V DC dash receptacle, depth sounder, grab assist handles, hatch screen, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated cockpit cover.

SLX II includes: Color-coordinated full canvas (aft, side).

SLX III includes: Color-coordinated camper canvas (aft, sides).

225 SUNDOWNER

Specifications*

LOA/Transom to Bow:	23'3"/21'8"
Beam:	8'4"
Keel to W/S Shelf:	65"
Total Height:	82"
Transom Angle:	15°
Deadrise:	21°
Bridge Clearance:	5'3"
Cockpit Height (stern):	31"
Cockpit Height (helm):	40"
Freeboard (min.):	40"
Draft (drive down):	35"
Fuel (gal.):	65
Passengers:	10
Maximum Capacity (lbs.):	2410

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
5.8L/V-8	240	215	4090
351CI/V-8	285	245	4190
454CI/V-8	330	275	4270

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
225S	5.8L	3110	980	50	390	250	1200



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
5.8L/240/215	15 x 17	AL	41-44	165
351CI/285/245	15 x 17	AL	44-47	150
454CI/330/275	14½ x 19	AL	47-50	150

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- Alcohol stove, 1 burner (requires cockpit galley)
- Anchor w/line
- Canvas, aft
- Canvas, camper
- Canvas, cockpit cover
- Canvas, full
- Canvas, mooring cover
- Canvas, sides
- 12V DC receptacle
- Cockpit galley
- Cockpit grab handles
- Compass
- Depth sounder
- Dual battery switch
- Fiberglass floor liner w/fiberglass seat box, engine cover
- Fiberglass transom door
- Flush out kit
- Grey water system
- Halon fireboy
- Hatch screen
- Head, enclosed
- Head, portable
- Head, pump out
- Horn, dual trumpet
- Hour meter
- Lights, courtesy
- Oil drip pan
- Prop, high alt./heavy load
- Prop, stainless steel (exchange)
- Radio, ship-to-shore
- SS (sun sport) interior
- Seating, bucket, both
- Seating, bucket, stbd.
- Seating, bucket & fishwell
- Seating, port adjuster
- Seating, stern couch
- Seating, wraparound stern couch
- Seating, wraparound stern couch with fill-in cushions
- SLX Package I
- SLX Package II
- SLX Package III
- Snap-in carpet
- Step access to standard walk-thru windshield
- Stereo upgrade
- Swim platform teak insert
- Table
- Table w/extra mount
- Tilt steering
- Transom washdown & shower (SS)
- Trim tabs
- Two-tone gelcoat
- Windshield wiper, starboard

Trailer Options

- Brakes, two axle
- Chrome wheels (tandem)
- Galvanized trailer
- Spare tire and wheel, white
- Spare tire and wheel, chrome/galvanized
- Spare tire cover

SLX Packages include: 12V DC dash receptacle, depth sounder, grab assist handles, hatch screen, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated cockpit cover.

SLX II includes: Color-coordinated full canvas (aft, side).

SLX III includes: Color-coordinated camper canvas (aft, side).



255 SUNDOWNER

Specifications*

LOA/Transom to Bow:	26'2"/24'7"
Beam:	8'6"
Keel to W/S Shelf:	71"
Total Height:	88"
Transom Angle:	14°
Deadrise:	21°
Bridge Clearance:	5'8"
Cockpit Height (stern):	29"
Cockpit Height (helm):	37"
Freeboard (min.):	40"
Draft (drive(s) down):	38"
Fuel (gal.):	100
Passengers:	10
Maximum Capacity (lbs.):	Y

*Dimensional diagram is located on page 92.

Y = Yacht certified

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
5.8L/V-8	240	215	4860
351CI/V-8	285	245	4950
454CI/V-8	330	275	5040
Twin 4.3L/V-6	175 EA	150 EA	5550

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
255S	351CI	3890	1080	50	600	250	1760



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
5.8L/240/215	15½ x 15	AL	37-40	190
351CI/285/245	15½ x 15	AL	40-43	190
454CI/330/275	15 x 17	AL	44-47	170
Twin 4.3L/175/150	14½ x 19	SSTII	43-47	180

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- Alcohol stove, 1 burner
- Anchor w/line
- Bow pulpit
- Canvas, aft
- Canvas, camper
- Canvas, cockpit cover
- Canvas, full
- Canvas, mooring cover
- Canvas, sides
- 12V DC receptacle
- Cockpit grab handles
- Compass
- Deck sunpad
- Depth sounder
- Dual battery switch
- Flush out kit
- Grey water system
- Halon fireboy
- Hatch screen
- Head, pump out
- Horn, dual trumpet
- Hour meter
- Lights, courtesy
- Lights, spot/floodlight remote (requires bow pulpit)
- Oil drip pan
- Prop, high alt./heavy load
- Prop, stainless steel (exchange)
- Radio, ship-to-shore
- Refrigerator
- SS (sun sport) interior
- Seating, bucket, both
- Seating, bucket, stbd.
- Seating, bucket & fishwell
- Seating, port adjuster
- Seating, stern couch
- Seating, wraparound stern couch, fill-in cushions
- SLX Package I
- SLX Package II
- SLX Package III
- Snap-in carpet
- Stereo upgrade
- Swim platform, teak insert
- Table w/extra mount
- Tilt steering
- Transom washdown & shower
- Trim tabs
- Two-tone gelcoat
- Windlass, chain/rope (requires bow pulpit)
- Windshield wiper, stbd.
- Windshield wiper, starboard & port

Trailer Options

- Trailer, tandem axle
- Brakes, two axles
- Chrome wheels, tandem
- Galvanized trailer
- Spare tire and wheel, white
- Spare tire and wheel chrome/galvanized
- Spare tire cover

SLX Packages include: 12V DC dash receptacle, depth sounder, grab assist handles, hatch screen, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated cockpit cover.

SLX II includes: Color-coordinated full canvas (aft, sides).

SLX III includes: Color-coordinated camper canvas (aft, side).

235 VISTA

Specifications*

LOA/Transom to Bow:	24'4"/22'9"
Beam:	8'6"
Keel to W/S Shelf:	77"
Total Height:	94"
Transom Angle:	15°
Deadrise:	17°
Bridge Clearance:	6'4"
Cockpit Height (stern):	26"
Cockpit Height (helm):	39"
Freeboard (min.):	47"
Draft (drive down):	36"
Fuel (gal.):	75
Water (gal.):	15
Passengers:	10
Maximum Capacity (lbs.):	2510

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
5.8L/V-8	240	215	4900
351CI/V-8	285	245	5000
454CI/V-8	330	275	5080

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
235V	351CI	3920	1080	50	450	250	1650



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
5.8L/240/215	15½ x 15	AL	35-38	130
351CI/285/245	15½ x 15	AL	38-41	130
454CI/330/275	15 x 17	AL	42-45	110

Fuel Flow Data - 235 Vista with 5.8L / 240 / 215

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	6
2500	15	8
3000	24	11
3500	29	14
4000	35	17
WOT	37	21

Fuel Flow Data - 235 Vista with 351CI / 285 / 245

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	6
2500	15	8
3000	25	11
3500	31	16
4000	36	19
WOT	40	23

Fuel Flow Data - 235 Vista with 454CI / 330 / 275

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	8
2500	15	11
3000	25	16
3500	31	22
4000	37	24
4500	43	25
WOT	44	27

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



235 VISTA

Options

- Anchor w/line
- Bow pulpit
- Canvas, aft
- Canvas, camper
- Canvas, cockpit cover
- Canvas, full
- Canvas, mooring cover
- Canvas, sides
- 12V DC receptacle
- C/O monitor
- Cockpit grab handles
- Compass
- Deck sunpad
- Depth sounder
- Dockside pwr/isol., bat. chg. switch & adapt.
- Dual battery switch
- Flush out kit
- Grey water system
- Halon fireboy
- Hatch screen
- Head, pump out
- Horn, dual trumpet
- Hour meter
- Lights, courtesy
- Lights, spot/floodlight remote (req. bow pulpit)
- Luxury package
- Microwave
- Oil drip pan
- Pillow package
- Prop, high alt./heavy load
- Prop, stainless steel (exchange)
- Radar arch
- Radio, ship-to-shore
- Refrigerator
- Seating, stern couch
- Seating, swivel companion couch (helm)
- Shower curtain
- SLX Package I
- SLX Package II
- SLX Package III
- Snap-in carpet
- Stereo remote
- Stereo upgrade
- Swim platform teak insert
- Table w/extra mount
- Tilt steering
- Transom washdown & shower
- Trim tabs
- Two-tone gelcoat
- Water heater
- Windshield wiper, stbd.
- Windshield wiper, starboard & port

Trailer Options

- Trailer, tandem axle
- Brakes, two axles
- Chrome wheels
- Galvanized trailer
- Spare tire and wheel, white
- Spare tire and wheel, chrome/galvanized
- Spare tire cover

SLX Packages include: 12V DC dash receptacle, depth sounder, grab assist handles, hatch screen, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated canvas cockpit cover.

SLX II includes: Color-coordinated full canvas (aft, side).

SLX III includes: Color-coordinated camper canvas (aft, side).

Luxury Package includes: Compass, dockside power w/switch adapter, microwave, refrigerator, shower curtain, snap-in carpet, water heater, and starboard windshield wiper.

265 VISTA

Specifications*

LOA/Transom to Bow:	26'2"/24'7"
Beam:	8'6"
Keel to W/S Shelf:	80"
Total Height:	8'2" (9'11"w/arch)
Transom Angle:	14°
Deadrise:	21°
Bridge Clearance:	6'8" (8' w/arch)
Cockpit Height (stern):	25"
Cockpit Height (helm):	27"/37"
Freeboard (min.):	48"
Draft (drive(s) down):	39"
Fuel (gal.):	85
Water (gal.):	20
Passengers:	10
Maximum Capacity:	Y

*Dimensional diagram is located on page 92.

Y = Yacht certified

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
351CI/V-8	285	245	5690
454CI/V-8	330	275	5770
Twin 4.3L/V-8	175 EA	150 EA	6300
Twin 5.0L-HO/V-8	200 EA	175 EA	6500

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
265V	454CI	4610	1160	60	510	350	1760

Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
351CI/285/245	15½ x 15	AL	36-39	120
454CI/330/275	15 x 17	AL	40-42	120
Twin 4.3L/175/150	14½ x 19	SSTII	43-45	140
Twin 5.0L-HO/200/175	14¼ x 21	SSTII	45-48	130

**Fuel Flow Data - 265 Vista with 351CI / 285 / 245**

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	8	5.5
2500	10	9
3000	25	16
3500	30	18
4000	36	22
WOT	38	23

Fuel Flow Data - 265 Vista with 454 CI / 330 / 275

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	8
2500	9	11
3000	13	15
3500	24	21
4000	34	23
4500	39	25
WOT	41	26

Fuel Flow Data - 265 Vista with Twin 4.3L / 175 / 150

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	10	9
2500	22	11
3000	30	20
3500	35	22
4000	39	24
4500	43	28
WOT	44	29

Fuel Flow Data - 265 Vista with Twin 5.0L-HO / 200 / 175

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	10	12
2500	24	12
3000	34	21
3500	40	22
4000	46	28
WOT	49	32

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

265 VISTA

Options

- A/C & heating
- Alcohol/electric stove
- Anchor w/line
- Bow pulpit
- Canvas, camper
- Canvas, cockpit cover
- Canvas, sides
- 12V DC receptacle
- C/O monitor
- Cockpit grab handles
- Compass
- Deck sunpad
- Depth sounder
- Docksider pwr/isol., bat. chg. switch & adapt.
- Dual battery switch
- Fiberglass transom door
- Flush out kit
- Grey water system
- Halon fireboy
- Hatch screen
- Head, pump out
- Horn, dual trumpet
- Hour meter
- Lights, courtesy
- Lights, spot/floodlight remote (req. bow pulpit)
- Luxury package**
- Microwave
- Oil drip pan
- Pillow package
- Prop, high alt./heavy load
- Prop, stainless steel (exchange)
- Radar arch
- Radio, ship-to-shore
- Refrigerator
- Seating, L-shaped, swivel
- Seating, stern couch
- Shower curtain
- SLX Package I
- SLX Package II
- SLX Package III
- Snap-in carpet
- Stereo remote
- Stereo upgrade
- Swim platform teak insert
- Table w/extra mount
- Tilt steering
- Transom washdown & shower
- Trim tabs
- Two-tone gelcoat
- Water heater
- Windlass, chain/rope
- Windshield wiper, starboard
- Windshield wiper, starboard & port

Trailer Options

- Trailer, tandem axle
- Brakes, two axles
- Chrome wheels
- Galvanized trailer
- Spare tire and wheel, white
- Spare tire and wheel, chrome/galvanized
- Spare tire cover

SLX Packages include: 12V DC dash receptacle, depth sounder, grab assist handles, hatch screen, courtesy lights, stereo upgrade, and tilt steering.

SLX I includes: Color-coordinated cockpit cover.

SLX II includes: Color-coordinated full canvas (aft, side).

SLX III includes: Color-coordinated camper canvas (aft, sides).

**Luxury Package includes: Compass, docksider power w/switch adapter, microwave, refrigerator, shower curtain, snap-in carpet, water heater, and starboard windshield wiper.

285

Specifications*

LOA/Transom to Bow:	28'11"/27'5"
Beam:	10'2"
Keel to W/S Shelf:	85"
Total Height:	8'9" (10'1" w/arch)
Transom Angle:	12°
Deadrise:	19°
Bridge Clearance:	7'3" (8'6" w/arch)
Cockpit Height (stern):	25"
Cockpit Height (helm):	34"
Freeboard (min.):	45"
Draft (drive(s) down):	39"
Fuel (gal.):	140
Water (gal.):	35
Passengers:	12
Maximum Capacity (lbs.):	Y

*Dimensional diagram is located on page 92.

Y = Yacht certified

Power Rating & Weights (Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
Twin 4.3L/V-6	175 EA	150 EA	8500
Twin 5.0L-HO/V-8	200 EA	175 EA	8700
Twin 3.2L/L-6 Diesel	205 EA	187 EA	8860
Twin 5.8L/V-8	240 EA	215 EA	8860
Twin 351CI/V-8	285 EA	245 EA	9060

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
285	Twin 5.0L-HO	6890	1810	100	840	840



Performance

Power HP	Propeller Dia" × Pitch"	Type	Top Speed MPH	Cruise Range MI
Twin 4.3L/175/150	15 x 17	SSTII	35-38	170
Twin 5.0L-HO/200/175	15 x 17	SSTII	36-39	170
Twin 3.2L/205/187	14¼ x 21	SSTII	42-45	250
Twin 5.8L/240/215	15 x 17	SSTII	40-43	160
Twin 351CI/285/245	15 x 17	SSTII	43-46	160

Fuel Flow Data - 285 with Twin 4.3L / 175 / 150

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	8	9
2500	9	10
3000	21	18
3500	27	22
4000	31	25
4500	35	27
WOT	37	29

Fuel Flow Data - 285 with Twin 5.0L-HO / 200 / 175

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	7	11
2500	10	17
3000	25	23
3500	31	27
4000	37	31
WOT	38	32

Fuel Flow Data - Twin 3.2L / 205 / 187 Diesel

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	8	4
2500	9	8
3000	12	14
3500	34	16
4000	40	19
WOT	43	24

- continued -



285

Fuel Flow Data - 285 with Twin 5.8L / 240 / 215

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	8	13
2500	10	19
3000	25	24
3500	33	30
4000	40	38
WOT	41	40

Fuel Flow Data - 285 with Twin 351CI / 285 / 245

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	14
2500	10	20
3000	26	26
3500	34	33
4000	42	44
WOT	44	46

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



Options

- Air conditioning/Heater
- Anchor w/line
- Bedding package
- Bottom paint
- Canvas, aft
- Canvas, camper (includes main sides)
- Canvas, cockpit
- Canvas, full (aft, side)
- Canvas, side
- CO monitor
- Cockpit carpet
- Compass
- Deck sunpad
- Flush out kit
- Gas vapor detector
- Gelcoat, two-tone
- Generator, 4 kw
- Greywater system
- Halon fireboy
- Hatch screen
- Head, treated discharge
- Head, vac-u-flush
- Horn, dual trumpet
- Hour meter
- Light, flood remote
- Microwave
- Oil drip pan
- Radar arch
- Radio, ship-to-shore
- Seat, stern couch
- Seating, luxury cockpit II
- Seating, luxury cockpit III
- Shower curtain
- Snap-in Sunbrella cabin runner
- Storage cradle
- Swim platform, teak insert
- Table w/extra mount
- Television
- Tilt steering
- Transom storage lockers, 2
- Transom washdown kit
- Vee-berth sleeper
- Windlass, rope and chain
- Windshield wiper, stbd.
- Windshield wiper, starboard & port

Luxury Package II: Dual companion seats (one adjustable, one swivel), refreshment center w/storage cabinet.

Luxury Package III: Dual companion seats as above, refreshment center w/icemaker.

315

Specifications*

LOA/Transom to Bow:	30'6"/28'6"
Beam:	11'
Keel to W/S Shelf:	87"
Total Height:	9'1" (10'7"w/arch)
Transom Angle:	12°
Deadrise:	19°
Bridge Clearance:	7'6" (9' w/arch)
Cockpit Height (stern):	28"
Cockpit Height (helm):	34"
Freeboard (min.):	44"
Draft (drives down):	40"
Fuel (gal.):	180
Water (gal.):	35
Passengers:	12
Maximum Capacity (lbs.):	Y

*Dimensional diagram is located on page 92.

Y = Yacht certified

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
Twin 3.2L/L-6 Diesel	205 EA	187 EA	10,200
Twin 5.8L/V-8	240 EA	215 EA	10,100
Twin 351CI/V-8	285 EA	245 EA	10,300
Twin 454CI/V-8	330 EA	275 EA	10,500

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
315	Twin 351CI	8140	2160	100	1080	750

Performance

Power HP	Propeller Dia" × Pitch"	Type	Top Speed MPH	Cruise Range MI
Twin 3.2L/205/187	14½ x 19	SSTII	39-42	280
Twin 5.8L/240/215	15 x 17	SSTII	38-41	200
Twin 351CI/285/245	15 x 17	SSTII	40-43	190
Twin 454CI/330/275	14½ x 19	SSTII	45-48	180

**Fuel Flow Data - 315 with Twin 3.2L / 205 / 187 Diesel**

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	7	5
2500	10	10
3000	12	14
3500	31	16
4000	37	18
WOT	41	24

Fuel Flow Data - 315 with Twin 5.8L / 240 / 215

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	14
2500	12	18
3000	28	25
3500	32	27
4000	38	42
WOT	40	44

Fuel Flow Data - 315 with Twin 351CI / 285 / 245

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	14
2500	13	18
3000	27	26
3500	33	28
4000	37	38
4500	40	43
WOT	42	48

Fuel Flow Data - 315 with Twin 454CI / 330 / 275

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	10	16
2500	13	21
3000	33	29
3500	37	34
4000	42	44
4500	46	48
WOT	47	53



315

Options

- Air conditioning/Heater
- Anchor w/line
- Bedding package
- Bottom paint
- Canvas, aft
- Canvas, camper (includes main sides)
- Canvas, cockpit
- Canvas, full (aft, side)
- Canvas, side
- CO monitor
- Cockpit carpet
- Compass
- Deck sunpad
- Flush out kit
- Gas vapor detector
- Gelcoat, two-tone
- Generator, 4.5 kw
- Greywater system
- Halon fireboy
- Hatch screen
- Head, treated discharge system
- Head, vac-u-flush
- Horn, dual trumpet
- Hour meter
- Light, flood remote
- Microwave
- Oil drip pan
- Radar arch
- Radio, ship-to-shore
- Seating, stern couch
- Seating, luxury cockpit I
- Seating, luxury cockpit II
- Seating, luxury cockpit III
- Snap-in Sunbrella cabin runner
- Storage cradle
- Swim platform, teak insert
- Table w/extra mount
- Television
- Tilt steering
- Transom storage lockers, 2
- Transom washdown kit
- Vee berth bulkhead
- Windlass, rope and chain
- Windshield wiper, stbd.
- Windshield wiper, starboard & port

Luxury Cockpit I: Dual companion seats (one adjustable, one swivel).

Luxury Cockpit II: Dual companion seats as above, refreshment center, icebox.

Luxury Cockpit III: Dual companion seats as above, refreshment center, icemaker.

325

Specifications*

LOA/Transom to Bow:	30'6"
Beam:	11'
Keel to W/S Shelf:	87"
Total Height:	9'1" (10'7"w/arch)
Transom Angle:	14°
Deadrise:	19°
Bridge Clearance:	7'6" (9' w/arch)
Cockpit Height (stern):	28"
Cockpit Height (helm):	34"
Freeboard (min.):	44"
Draft:	34"
Fuel (gal.):	180
Water (gal.):	35
Passengers:	12
Maximum Capacity (lbs.):	Y

*Dimensional diagram is located on page 92.

Y = Yacht certified

Power Rating & Weights (Lbs.)

Engine Type	Crankshaft HP	Shaft HP	Boat & Engine Weights
Twin TAMD 41/L-6	200 EA	195 EA	11,500
Twin 350CID/V-8	270 EA	235 EA	11,000
Twin 454CID/V-8	350 EA	300 EA	11,500

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
325	Twin 454CID	9960	1940	100	1080	750

Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
Twin TAMD 41//200/195	17 x 19	NIBRAL	30-32	200
Twin 350CID/270/235	17 x 18	NIBRAL	32-34	160
Twin 454CID/350/300	17 x 20	NIBRAL	36-38	150

**Fuel Flow Data - 325 with Twin TAMD 41 Volvo / 200 / 195**

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	12	8
2500	17	11
3000	22	14
3500	27	20
WOT	31	26

Fuel Flow Data - 325 with Twin 350CID Crusaders / 270 / 235

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	14
2500	11	18
3000	26	27
3500	28	30
4000	31	42
4500	33	45
WOT	34	48

Fuel Flow Data - 325 with Twin 454 CID Crusaders / 350 / 300

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	10	16
2500	12	21
3000	27	30
3500	30	35
4000	34	44
4500	37	51
WOT	38	56

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

325

Options

- Air conditioning/Heater
- Anchor w/line
- Bedding package
- Bottom paint
- Canvas, aft
- Canvas, camper (includes main sides)
- Canvas, cockpit
- Canvas, full (aft, side)
- Canvas, side
- CO monitor
- Cockpit carpet
- Compass
- Deck sunpad
- Flush out kit
- Fresh water engine cooling system
- Gas vapor detector
- Gelcoat, two-tone
- Generator, 4.5 Kw
- Greywater system
- Halon fireboy
- Hatch screen
- Head, treated discharge
- Head, vac-u-flush
- Horn, dual trumpet
- Hour meter
- Light, flood remote
- Microwave
- Oil drip pan
- Radar arch
- Radio, ship-to-shore
- Snap-in Sunbrella cabin runner
- Seating, stern couch
- Seating, luxury cockpit I
- Seating, luxury cockpit II
- Seating, luxury cockpit III
- Storage cradle
- Swim platform, teak insert
- Table w/extra mount
- Television
- Tilt steering
- Transom storage lockers, 2
- Transom washdown kit
- Vee berth bulkhead
- Windlass, rope and chain
- Windshield wiper, stbd.
- Windshield wiper, stbd. & port

Luxury Cockpit I: Dual companion seats (one adjustable, one swivel).

Luxury Cockpit II: Dual companion seats as above, refreshment center, icebox.

Luxury Cockpit III: Dual companion seats as above, refreshment center, icemaker.

365

Specifications*

LOA/Transom to Bow:	39'/36'
Beam:	13'2"
Keel to W/S Shelf:	108"
Total Height:	10'6" (12' w/arch)
Transom Angle:	9°
Deadrise:	16°
Bridge Clearance:	7'6" (10'4" w/arch)
Cockpit Height (stern):	34"
Cockpit Height (helm):	44"
Freeboard (min.):	45"
Draft:	38"
Fuel (gal.):	300
Water (gal.):	98
Passengers:	15
Maximum Capacity (lbs.):	Y

*Dimensional diagram is located on page 92.

Y = Yacht certified

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Shaft HP	Boat & Engine Weights
Twin 454CID/V-8	350 EA	300 EA	17,500
Twin 502CID/V-8	390 EA	355 EA	17,500

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
365	Twin 502CID	15,500	1960	100	1800	900	NA

Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
Twin 454CID/350/300	19 x 17	NIBRAL	29-32	200
Twin 502CID/390/355	19 x 19	NIBRAL	32-35	200



Fuel Flow Data - 365 with Twin 454CID Crusaders / 350 / 300

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	8	10
2500	10	15
3000	16	25
3500	22	36
4000	28	44
WOT	31	52

Fuel Flow Data - 365 Express with Twin 502CID Crusaders / 390 / 355

Engine Speed-RPM	Boat Speed-MPH	Fuel Flow-GPH
2000	9	16
2500	11	22
3000	18	33
3500	25	42
4000	30	52
WOT	34	62

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- Air conditioning/Heater
- Anchor w/line
- Bedding package
- Bottom paint
- Canvas, camper (includes main sides)
- Canvas, cockpit
- Canvas, full (aft, side)
- Canvas, side
- CO monitor
- Cockpit carpet
- Coffee maker
- Compass
- Deck sunpad
- Fresh water engine cooling system
- Gas vapor detector
- Generator, 7 Kw
- Greywater system
- Halon fireboy
- Hatch screen
- Head, treated discharge system
- Head, vac-u-flush
- Horn, dual trumpet
- Hour meter
- Kitchen center
- Light, flood remote
- Microwave
- Oil drip pan
- Radar arch
- Radio, ship-to-shore
- Refreshment center w/icemaker
- Seating, salon chairs (2)
- Seating, stern couch
- Snap-in Sunbrella cabin runner
- Spa with jet pump
- Stereo upgrade w/CD player
- Storage cradle
- Swim platform, teak insert
- Table w/extra mount
- Television
- Television/VCP center
- Tilt steering
- Transom washdown kit
- VCP
- Vee berth bulkhead
- Windlass, chain
- Windshield wiper, stbd.
- Windshield wiper, stbd. & port



201 LIBERATOR

Specifications*

LOA/Transom to Bow:	20'9"/19'4"
Beam:	7'8"
Keel to W/S Shelf:	51"
Total Height:	64"
Transom Angle:	14°
Deadrise:	21°
Bridge Clearance:	3'10"
Cockpit Height (stern):	36"
Cockpit Height (helm):	33"
Freeboard (min.):	32"
Draft (drive down):	35"
Fuel (gal.):	44
Passengers:	8
Maximum Capacity (lbs.):	1565

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
5.8L/V-8	240	215	3310
351CI/V-8	285	245	3410
454CI/V-8	330	275	3490

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
201L	351CI	2320	1080	50	260	100	1070



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
5.8L/240/215	14½ x 19	VIPER	49-51	140
351CI/285/245	14½ x 19	VIPER	52-54	140
454CI/330/275	14¼ x 21	VIPER	56-58	130

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Anchor w/line • Canvas, aft • Canvas, full • Canvas, mooring cover • Canvas, sides • Compass • Dual battery switch • Electric hatch w/mirror • Fiberglass floor liner • Flush out kit • Halon fireboy | <ul style="list-style-type: none"> • Head, portable • Head, pump out • Hour meter • Oil drip pan • Prop, high alt./heavy load • Snap-in carpet • Swim platform • Teak insert • Table w/extra mount • Thru hull exhaust • Transom washdown & shower • Windshield wiper, starboard | <p>Trailer Options</p> <ul style="list-style-type: none"> • Brakes, single or tandem • Chrome wheels • Galvanized trailer • Spare tire & wheel, white • Spare tire & wheel, chrome/galvanized • Spare tire cover |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

221 LIBERATOR

Specifications*

LOA/Transom to Bow:	23'3"/21'8"
Beam:	8'4"
Keel to W/S Shelf:	54"
Total Height:	64"
Transom Angle:	15°
Deadrise:	21°
Bridge Clearance:	3'10"
Cockpit Height (stern):	31"
Cockpit Height (helm):	32"
Freeboard (min.):	35"
Draft (drive down):	34"
Fuel (gal.):	65
Passengers:	8
Maximum Capacity (lbs.):	2410

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
351CI/V-8	285	245	3910
454CI/V-8	330	275	3990
502CI/V-8	420	375	3990

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
221L	502CI	2830	1160	60	390	200	1200



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
351CI/285/245	15 x 17	SSTII	48-51	180
454CI/330/275	14½ x 20	RAKER	53-56	170
502CI/420/375	14½ x 20	RAKER	60-63	170

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- Anchor w/line
- Canvas, aft
- Canvas, full
- Canvas, mooring cover
- Canvas, sides
- Compass
- Dual battery switch
- Electric hatch w/mirror
- Fiberglass floor liner
- Flush out kit
- Grey water system
- Halon fireboy
- Head, portable
- Head, pump out
- Hour meter
- Lights, docking
- Oil drip pan
- Prop, high alt./ heavy load
- Snap-in carpet
- Swim platform teak insert
- Table w/extra mount
- Thru hull exhaust
- Transom washdown & shower
- Trim tabs
- Windshield wiper, starboard

Trailer Options

- Brakes, tandem
- Chrome wheels
- Galvanized trailer
- Spare tire & wheel, white
- Spare tire & wheel, chrome/galvanized
- Spare tire cover

251 LIBERATOR

Specifications*

LOA/Transom to Bow:	26'2"/24'7"
Beam:	8'6"
Keel to W/S Shelf:	61"
Total Height:	75"
Transom Angle:	14°
Deadrise:	21°
Bridge Clearance:	4'5"
Cockpit Height (stern):	31"
Cockpit Height (helm):	33"
Freeboard (min.):	38"
Draft (drive(s) down):	38"
Fuel (gal.):	100
Water (gal.):	20
Passengers:	10
Maximum Capacity (lbs.):	Y

*Dimensional diagram is located on page 92.

Y = Yacht certified

Power Rating & Weights

(Lbs.)

Engine Type	Crankshaft HP	Propshaft HP	Boat & Engine Weights
454CI/V-8	330	275	4760
502CI/V-8	420	375	4760
Twin 351CI/V-8	285 EA	245 EA	5810

Recommended Engine(s)/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
251L	Twin 351CI	3650	2160	100	600	250	1760



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
454CI/330/275	14½ x 19	VIPER	47-50	180
502CI/420/375	14½ x 19	VIPER	52-54	180
Twin 351CI/285/245	14¼ x 22	RAKER	59-62	190

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Options

- Anchor w/line
- Canvas, aft
- Canvas, full
- Canvas, mooring cover
- Canvas, sides
- Compass
- Deck sunpad
- Dual battery switch
- Electric hatch w/mirror
- Flush out kit
- Gas vapor detector
- Grey water system
- Halon fireboy
- Head, portable
- Head, pump out
- Hour meter
- Lights, docking
- Oil drip pan
- Prop, high alt./heavy load
- Refrigerator
- Seat, power bolster
- Ship-to-shore
- Snap-in carpet
- Swim platform teak insert
- Table w/extra mount
- Thru hull exhaust
- Transom washdown & shower
- Trim tabs
- Windshield wiper, starboard
- Windshield wiper, starboard & port
- Trailer Options**
- Trailer, tandem axle
- Brakes, tandem
- Chrome wheels
- Galvanized trailer
- Spare tire & wheel, white
- Spare tire & wheel, chrome/galvanized
- Spare tire cover

187 QUEST

Specifications*

LOA/Transom to Bow:	17'9"
Beam:	7'8"
Keel to W/S Shelf:	69"
Total Height:	84"
Transom Angle:	16°
Deadrise:	19°
OB Transom Height:	25"
Bridge Clearance:	6'
Cockpit Height (stern):	19"
Cockpit Height (helm):	22"
Freeboard (min.):	23"
Draft (engine down):	27"
Fuel (gal.):	45
Passengers:	6
Maximum Capacity (lbs.):	1650

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Propshaft HP	Boat & Engine Weights
120 TX/V-4	120	2210
150 EX/V-6	150	2210

NA = Not available

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
187Q	150 EX	1840	360	50	270	200	--



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
120 TX/120	13¼ x 17	AL	40-43	150
150 EX/150	14½ x 19	AL	44-47	140

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Available Features	187 Quest	187 Quest XE
--------------------	-----------	--------------

<input type="checkbox"/> Bow lifting eye	NA	STD
<input type="checkbox"/> Bow rail	A	STD
<input type="checkbox"/> Canvas, Bimini top	A	A
<input type="checkbox"/> Canvas, console cover	A	A
<input type="checkbox"/> Canvas, full enclosure	A	A
<input type="checkbox"/> Canvas, mooring cover	A	A
<input type="checkbox"/> Canvas, spray hood w/connectors	A	A
<input type="checkbox"/> Canvas, t-top w/canvas	A	A
<input type="checkbox"/> Coaming pads	A	A
<input type="checkbox"/> Cockpit lights	A	STD
<input type="checkbox"/> Compass	A	STD
<input type="checkbox"/> Cooler w/cushions	A	STD
<input type="checkbox"/> Livewell	A	STD
<input type="checkbox"/> Outriggers, 15-foot	A	A
<input type="checkbox"/> Prop, stainless steel	A	A
<input type="checkbox"/> Rod holders	2	4
<input type="checkbox"/> Steering, hydraulic	A	A
<input type="checkbox"/> Stern seat cushions	A	STD
<input type="checkbox"/> Sunpads	A	A
<input type="checkbox"/> Tackle drawer	A	STD
<input type="checkbox"/> Washdown	A	STD

Trailer Options:

<input type="checkbox"/> Single axle trailer	A	A
<input type="checkbox"/> Spare tire & wheel	A	A
<input type="checkbox"/> Spare tire cover	A	A

A = Available

NA = Not available

STD = Standard

207 QUEST

Specifications*

LOA/Transom to Bow:	19'3"
Beam:	8'2"
Keel to W/S Shelf:	69"
Total Height:	84"
Transom Angle:	16°
Deadrise:	19°
OB Transom Height:	25"
Bridge Clearance:	5'9"
Cockpit Height (stern):	23"
Cockpit Height (helm):	25"
Freeboard (min.):	28"
Draft (engine down):	30"
Fuel (gal.):	85
Passengers:	7
Maximum Capacity (lbs.):	2150

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Propshaft HP	Boat & Engine Weights
120 TX/V-4	120	2620
150 EX/V-6	150	2620
200 TX/V-6	200	2700

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
207Q	150 EX	2250	360	50	510	250	--



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
120 TX/120	13 ³ / ₄ x 15	AL	34-38	270
150 EX/150	15 x 17	AL	40-43	270
200 TX/200	14 ¹ / ₂ x 19	AL	46-49	250

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Available Features

Available Features	207 Quest	207 Quest XE
<input type="checkbox"/> Bow lifting eye	NA	STD
<input type="checkbox"/> Bow rail	A	STD
<input type="checkbox"/> Canvas, Bimini top	A	A
<input type="checkbox"/> Canvas, console cover	A	A
<input type="checkbox"/> Canvas, full enclosure	A	A
<input type="checkbox"/> Canvas, mooring cover	A	A
<input type="checkbox"/> Canvas, spray hood w/connectors	A	A
<input type="checkbox"/> Canvas, t-top w/canvas	A	A
<input type="checkbox"/> Coaming pads	A	A
<input type="checkbox"/> Cockpit lights	A	STD
<input type="checkbox"/> Compass	A	STD
<input type="checkbox"/> Cooler w/cushions	A	STD
<input type="checkbox"/> Livewell	A	STD
<input type="checkbox"/> Outriggers, 15-foot	A	A
<input type="checkbox"/> Prop, stainless steel (exchange)	A	A
<input type="checkbox"/> Rod holders	2	4
<input type="checkbox"/> Steering, hydraulic	A ¹	A ¹
<input type="checkbox"/> Stern seat cushions	A	STD
<input type="checkbox"/> Sunpads	A	A
<input type="checkbox"/> Tackle drawer	A	STD
<input type="checkbox"/> Washdown	A	STD

Trailer Options:

<input type="checkbox"/> Single axle trailer	A	A
<input type="checkbox"/> Spare tire & wheel	A	A
<input type="checkbox"/> Spare tire cover	A	A

¹Required w/200 HP engine.

A = Available

NA = Not available

STD = Standard

217 QUEST

Specifications*

LOA/Transom to Bow:	20'1"
Beam:	8'6"
Keel to W/S Shelf:	59"
Total Height:	88" (110" w/T-top)
Transom Angle:	16°
Deadrise:	19°
OB Transom Height:	25"
Bridge Clearance:	5'11" (7'9" w/T-top)
Cockpit Height (stern):	25"
Cockpit Height (helm):	26"
Freeboard (min.):	31"
Draft (engine down):	32"
Fuel (gal.):	115
Passengers:	8
Maximum Capacity (lbs.):	2200

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Propshaft HP	Boat & Engine Weights
200 TX/V-6	200	3320
250 TX/V-8	250	3420
Twin 120 TL/V-4	120 EA	3700

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
217Q	200 TX	2870	450	50	660	300	--



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
200 TX/200	15 x 17	AL	41-45	280
250 TX/250	14½ x 19	AL	47-51	270
Twin 120 TL/120	13 x 19	AL	44-47	270

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Available Features	217 Quest	217 Quest XE
--------------------	-----------	--------------

<input type="checkbox"/> Canvas, Bimini top	A	A
<input type="checkbox"/> Canvas, console cover	A	A
<input type="checkbox"/> Canvas, full enclosure	A	A
<input type="checkbox"/> Canvas, leaning post cover	A	A
<input type="checkbox"/> Canvas, mooring cover	A	A
<input type="checkbox"/> Canvas, spray hood w/connectors	A	A
<input type="checkbox"/> Canvas, t-top w/canvas	A	A
<input type="checkbox"/> Coaming pads	A	STD
<input type="checkbox"/> Cockpit lights	A	STD
<input type="checkbox"/> Compass	A	STD
<input type="checkbox"/> Cooler w/cushions	A	STD
<input type="checkbox"/> Fishbox, pump-out	NA	STD
<input type="checkbox"/> Leaning post	A	A
<input type="checkbox"/> Livewell	A	STD
<input type="checkbox"/> Outriggers, 15-foot	A	A
<input type="checkbox"/> Outriggers, 18-foot	A	A
<input type="checkbox"/> Prop, stainless steel (exchange)	A	A
<input type="checkbox"/> Pulpit roller	A	STD
<input type="checkbox"/> Rod holders	2	4
<input type="checkbox"/> Spring line cleats	A	STD
<input type="checkbox"/> Stern seat cushions	A	STD
<input type="checkbox"/> Sunpads	A	A
<input type="checkbox"/> Tackle drawer	A	STD
<input type="checkbox"/> Washdown	A	STD

Trailer Options:

<input type="checkbox"/> Tandem axle trailer	A	A
<input type="checkbox"/> Trailer brakes, 2 axles	A	A
<input type="checkbox"/> Spare tire & wheel	A	A
<input type="checkbox"/> Spare tire cover	A	A

A = Available

NA = Not available

STD = Standard

237 QUEST

Specifications*

LOA/Transom to Bow:	22'6"
Beam:	9'
Keel to W/S Shelf:	65"
Total Height:	84" (105"w/T-top)
Transom Angle:	16°
Deadrise:	19°
OB Transom Height:	25"
Bridge Clearance:	5'6" (7'2" w/T-top)
Cockpit Height (stern):	24"
Cockpit Height (helm):	27"
Freeboard (min.):	33"
Draft (engine down):	34"
Fuel (gal.):	145 (std.) 195 (opt.)
Passengers:	9
Maximum Capacity (lbs.):	2750

*Dimensional diagram is located on pages 92.

Power Rating & Weights

(Lbs.)

Engine Type	Propshaft HP	Boat & Engine Weights
200 TX/V-6	200	4130
250 TX/V-8	250	4230
Twin 150 EX/NX/V-6	150 EA	4370
Twin 200 TX/CX/V-6	200 EA	4550

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
237Q	Twin 150 EX/NX	3680	740	100	870	400	--



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
200 TX/200	15 x 16	SSTII	37-41	270
250 TX/250	15 x 17	SSTII	41-45	250
Twin 150 EX/NX/150	14½ x 19	SSTII	46-49	270
Twin 200 TX/CX/200	14¼ x 21	SSTII	53-58	240

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Available Features

237 Quest

237 Quest XE

<input type="checkbox"/> Canvas, Bimini top	A	A
<input type="checkbox"/> Canvas, console cover	A	A
<input type="checkbox"/> Canvas, full enclosure	A	A
<input type="checkbox"/> Canvas, leaning post cover	A	A
<input type="checkbox"/> Canvas, leaning post w/livewell	A	A
<input type="checkbox"/> Canvas, mooring cover	A	A
<input type="checkbox"/> Canvas, spray hood w/connectors	A	A
<input type="checkbox"/> Canvas, t-top w/canvas	A	A
<input type="checkbox"/> Coaming pads	A	STD
<input type="checkbox"/> Cockpit lights	A	STD
<input type="checkbox"/> Compass	A	STD
<input type="checkbox"/> Cooler w/cushions	A	STD
<input type="checkbox"/> Fishbox, pump-out	NA	STD
<input type="checkbox"/> Fuel, increased capacity*	A	A
<input type="checkbox"/> Leaning post	A	A
<input type="checkbox"/> Leaning post w/livewell	A	A
<input type="checkbox"/> Outriggers, 15-foot	A	A
<input type="checkbox"/> Outriggers, 18-foot	A	A
<input type="checkbox"/> Porta-potti	A	STD
<input type="checkbox"/> Pulpit roller	A	STD
<input type="checkbox"/> Rod holders	2	4
<input type="checkbox"/> Spring line cleats	A	STD
<input type="checkbox"/> Stereo w/2 speakers	NA	STD
<input type="checkbox"/> Stern couch	A	A
<input type="checkbox"/> Sunpads	A	A
<input type="checkbox"/> Tackle drawer	A	STD
<input type="checkbox"/> Washdown	A	STD

Trailer Options:

<input type="checkbox"/> Tandem axle trailer	A	A
<input type="checkbox"/> Trailer brakes	A	A
<input type="checkbox"/> Spare tire & wheel	A	A
<input type="checkbox"/> Spare tire cover	A	A

* Eliminates in-deck livewell.

A = Available

NA = Not available

STD = Standard

257 QUEST

Specifications*

LOA/Transom to Bow:	25'
Beam:	9'5"
Keel to W/S Shelf:	72"
Total Height:	8' (10'½" w/Tower)
Transom Angle:	16°
Deadrise:	20°
OB Transom Height:	25"
Bridge Clearance:	6'3" (8'5" w/T-top)
Cockpit Height (stern):	26"
Cockpit Height (helm):	36"
Freeboard (min.):	36"
Draft (engine down):	36"
Fuel (gal.):	250
Passengers:	10
Maximum Capacity (lbs.):	3800

*Dimensional diagram is located on page 92.

Power Rating & Weights

(Lbs.)

Engine Type	Propshaft HP	Boat & Engine Weights
Twin 150 EX/NX/V-6	150 EA	5740
Twin 200 TX/CX/V-6	200 EA	5900

Recommended Engine/Equipment Avg. Weights (Lbs.)

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
257Q	Twin 200TX/CX	4990	910	100	1500	500	--



Performance

Power HP	Propeller Dia" x Pitch"	Type	Top Speed MPH	Cruise Range MI
Twin 150 EX/NX/150	15 x 17	SSTII	41-44	340
Twin 200 TX/CX/200	14½ x 19	SSTII	46-49	320

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

Available Features	257 Quest	257 Quest XE
--------------------	-----------	--------------

<input type="checkbox"/> Alcohol stove, 1 burner	A	STD
<input type="checkbox"/> Canvas, Bimini top	A	A
<input type="checkbox"/> Canvas, cockpit cover	A	A
<input type="checkbox"/> Canvas, full enclosure	A	A
<input type="checkbox"/> Coaming pads	A	STD
<input type="checkbox"/> Cockpit lights	A	STD
<input type="checkbox"/> Fishbox, pump-out	NA	STD
<input type="checkbox"/> Hardtop w/electronics box	A	A
<input type="checkbox"/> Icebox	A	STD
<input type="checkbox"/> Livewell, port	STD	STD
<input type="checkbox"/> Livewell, starboard	A	STD
<input type="checkbox"/> Outriggers, 18-foot	A	A
<input type="checkbox"/> Porta-potti	A	STD
<input type="checkbox"/> Pulpit roller	A	STD
<input type="checkbox"/> Spring line cleats	A	STD
<input type="checkbox"/> Stereo w/speakers	A	STD
<input type="checkbox"/> Stern couch	A	A
<input type="checkbox"/> Table	A	STD
<input type="checkbox"/> Tackle drawer	A	STD
<input type="checkbox"/> Washdown	A	STD

Trailer Options:

<input type="checkbox"/> Tandem axle trailer	A	A
<input type="checkbox"/> Trailer brakes, two axles	A	A
<input type="checkbox"/> Spare tire & wheel	A	A
<input type="checkbox"/> Spare tire cover	A	A

A = Available

NA = Not available

STD = Standard



FREEDOM TRAILER SPECIFICATIONS

180
FREEDOM

Length with tongue	19'6"
Length without tongue	15'10"
Width	96"
Empty Weight (lbs.)	650
Carrying Capacity (lbs.)	2,770
GVWR (lbs.) (Gross Vehicle Weight Rating)	3,420
GAWR (lbs.) (Gross Axle Wt. Rat.)	3,420
Height (Top of Windshield, with Boat on Trailer)	NA
Tire Size	F78-14
Load Range	C
Axle	Single
Hub	5 Lug 4½" Bolt Pattern
Wheel Type	Modstyle
Jack	750 lbs. capacity
Winch (lbs.)	1,400
Coupler (lbs.)	3,500

NA = Not Available at time of printing.



HORIZON TRAILER SPECIFICATIONS

	190 HORIZON	200 (S) HORIZON	200 (T) HORIZON	220 HORIZON
Length with tongue	20'6"	22'	22'	23'2"
Length without tongue	17'8"	18'6"	18'6"	18'10"
Width	96"	96"	96"	96"
Empty Weight (lbs.)	780	980	1070	1140
Carrying Capacity (lbs.)	3960	3760	3930	4860
GVWR (lbs.) (Gross Vehicle Weight Rating)	4740	4740	5000	6000
GAWR (lbs.) (Gross Axle Wt. Rat.)	4740	4740	2500	3000
Height (Top of Windshield, with Boat on Trailer)	NA	NA	NA	NA
Tire Size	H78-15	H78-15	P205-14	G78-14
Load Range	D	D	B	C
Axle	Single	Single	Tandem	Tandem
Hub	6 Lug, 5½" Bolt Pattern	6 Lug, 5½" Bolt Pattern	5 Lug, 4½" Bolt Pattern	5 Lug, 4½" Bolt Pattern
Wheel Type	Mod Style	Mod Style	Mod Style	Mod Style
Jack (lbs.)	750	750	750	750
Winch (lbs.)	1400	1800	1800	2000
Coupler (lbs.)	5000	5000	5000	6000

NA = Not Available at time of printing (S) Single (T) Tandem



CANDIA TRAILER SPECIFICATIONS

	180 CANDIA	200 CANDIA
Length with tongue	21'4"	23'
Length without tongue	16'8"	18'10"
Width	102"	102"
Empty Weight (lbs.)	940	1,150
Carrying Capacity (lbs.)	3,800	3,850
GVWR (lbs.) (Gross Vehicle Weight Rating)	4,740	5,000
GAWR (lbs.) (Gross Axle Wt. Rat.)	4,740	2,500 ea
Height (Top of Windshield, with Boat on Trailer)	NA	NA
Tire Size	H78-15"	P205-14"
Load Range	D	B
Axle	Single	Tandem
Hub	6 Lug 5½" Bolt Pattern	5 Lug 4½" Bolt Pattern
Wheel Type	Mod Style	Mod Style
Jack (lbs.)	750	750
Winch (lbs.)	1,800	1,800
Coupler (lbs.)	5,000	5,000

NA = Not Available at time of printing.



SUNDOWNER TRAILER SPECIFICATIONS

	195 SUN- DOWNER	205 SUN- DOWNER	225 SUN- DOWNER	255 SUN- DOWNER
Length with tongue	20'6"	22'	23'2"	28'
Length without tongue	16'10"	18'6"	18'10"	24'9"
Width	96"	96"	96"	102"
Empty Weight (lbs.)	780	1,070	1,145	1,760
Carrying Capacity (lbs.)	3,960	3,930	5,855	7,720
GVWR (lbs.) (Gross Vehicle Weight Rating)	4,740	5,000	7,000	9,480
GAWR (lbs.) (Gross Axle Wt. Rat.)	4,740	2,500 ea	3,500 ea	4,740
Height (Top of Windshield, with Boat on Trailer)	NA	85"	NA	105"
Tire Size	H78-15	P-205	G78-14	H78-15
Load Range	D	B	C	D
Axle	Single	Tandem	Tandem	Tandem
Hub	6 Lug 5½" Bolt Pattern	5 Lug 5½" Bolt Pattern	5 Lug 5½" Bolt Pattern	6 Lug 5½" Bolt Pattern
Wheel Type	Mod Style	Mod Style	Mod Style	Mod Style
Jack (lbs.)	750	750	750	750
Winch (lbs.)	1,400	1,800	2,000	2,600
Coupler (lbs.)	5,000	5,000	10,000	10,000

NA = Not Available at time of printing.



VISTA

TRAILER SPECIFICATIONS

	235 VISTA	265 VISTA
Length with tongue	25'5"	28'
Length without tongue	22'	24'9"
Width (outside of tires)	102"	102"
Empty Weight (lbs.)	1,620	1,760
Carrying Capacity (lbs.)	7,860	7,720
GVWR (lbs.) (Gross Vehicle Weight Rating)	9,480	9,480
GAWR (lbs.) (Gross Axle Wt. Rat.)	4,740 ea	4,740 ea
Height (Top of Windshield/ Radar Arch w/Boat on Trailer)	NA	143"
Tire Size	H78-15 ST	
Load Range	D	
Axle	Tandem	
Hub	6 Lug 5½" Bolt Pattern	
Wheel Type	Mod Style	
Jack	750 lbs.	
Winch (lbs.)	2,600	
Coupler (lbs.)	10,000	

NA = Not Available at time of printing.



LIBERATOR TRAILER SPECIFICATIONS

	201 LIBERATOR	221 LIBERATOR	251 LIBERATOR
Length with tongue	22'	23'2"	28'
Length without tongue	18'6"	18'10"	24'9"
Width	96"	96"	102"
Empty Weight (lbs.)	1,070	1,140	1,760
Carrying Capacity (lbs.)	3,930	4,860	7,720
GVWR (lbs.) (Gross Vehicle Weight Rating)	5,000	6,000	9,480
GAWR (lbs.) (Gross Axle Wt. Rat.)	2,500	3,000	4,740
Height (Top of Windshield, with Boat on Trailer)	NA	NA	95"
Tire Size	P-205-14	G78-14	H78-15
Load Range	B	C	D
Axle	Tandem	Tandem	Tandem
Hub	5 Lug 4½" Bolt Pattern	5 Lug 4½" Bolt Pattern	6 Lug 5½" Bolt Pattern
Wheel Type	Mod Style	Mod Style	Mod Style
Jack (lbs.)	750	750	750
Winch (lbs.)	1,800	2,000	2,600
Coupler (lbs.)	5,000	6,000	10,000

NA = Not Available at time of printing.



QUEST TRAILER SPECIFICATIONS

	187 QUEST	207 QUEST	207 QUEST	217 QUEST	237 QUEST	257 QUEST
Length with tongue	20'10"	21'11"	21'11"	23'11"	25'8"	28'3"
Length without tongue	17'9"	19'7"	19'7"	20'6"	23'2½"	24'9"
Width (outside of tires)	102"	102"	102"	96"	102"	102"
Empty Weight (lbs.)	900	1,020	1,140	1,195	1,730	1,740
Carrying Capacity (lbs.)	2,800	3,720	4,360	4,805	7,750	7,740
GVWR (lbs.) Gross Vehicle Weight Rating	3,700	4,740	5,500	6,000	9,480	9,480
GAWR (lbs.) (Gross Axle Wt. Rat.)	3,700	4,740	2,750 ea	3,000	4,740	4,740
Height (Top of Windshield, w/Boat on Trailer/Canopy)	NA	NA	NA	117"/138"	112"/132"	NA
Tire Size	G78x14	H78-15	F78-14	G78-14	H78x15	H78x15
Load Range	C	D	C	C	D	D
Axle	SINGLE	SINGLE	TANDEM	TANDEM	TANDEM	TANDEM
Hub	5 lug 4½" Bolt Pattern	6 lug 5½" Bolt Pattern	5 lug 4½" Bolt Pattern	5 lug 4½" Bolt Pattern	6 lug 5½" Bolt Pattern	6 lug 5½" Bolt Pattern
Wheel Type	Mod. Style	Mod. Style	Mod. Style	Mod. Style	Mod. Style	Mod. Style
Jack (lbs.)	750	750	750	750	750	750
Winch (lbs.)	1,800	1,800	1,800	2,000	2,600	2,600
Coupler (lbs.)	5,000	5,000	6,000	6,000	10,000	10,000

NA = Not Available at time of printing.



OB SPECIFICATIONS

DESCRIPTION	90 TL	120 TX/120 TL
SHAFT LENGTH (In.)	20	(1) 25 / (2) 20
WEIGHT (lbs.)	301	370 / 365
ENGINE TYPE	Cross Flow 90° V-4	Loop Charged 90° V-4
BORE, STROKE DISPLACEMENT CUBIC INCHES (C. C.)	3.500 x 2.588 99.6 (1632 c. c.)	3.685 x 2.858 122 (2000 c. c.)
STARTING	Electric 12-volt key switch	Electric 12-volt key switch
TRIM	Power trim & tilt Std	Power trim & tilt standard
PROPSHAFT HORSEPOWER	90-HP at 5000 RPM	120-HP at 5500 RPM
FULL-THROTTLE OPERATING RANGE	4500-5500 RPM	5000-6000 RPM
GEAR RATIO/SHIFT	13:26 (.5)/F-N-R	13:26 (.5)/F-N-R
CARBURETION	2 dual-throat carburetors	2 dual-throat carburetors
ALTERNATOR	3/9 amp with voltage regulator	3/9 amp with voltage regulator
COOLING	Automatic pressure- temperature controlled	Automatic pressure- temperature controlled

Evinrude and Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

OB SPECIFICATIONS

150 EX / NX

175 EX

200 TX / CX

250 TX

25

25

25

25

359

359

453

555

Loop Charged
60° V-6Loop Charged
60° V-6Loop Charged
90° V-6Loop Charged
90° V-83.600 x 2.588
158 (2589 c.c.)3.600 x 2.588
158 (2589 c.c.)3.685 x 2.858
183
(3000 c.c.)3.685 x 2.858
244
(4000 c.c.)Electric 12-volt
key switchElectric 12-volt
key switchElectric 12-volt
key switchElectric 12-volt
key switchPower trim &
tilt standardPower trim &
tilt standardPower trim &
tilt standardPower trim &
tilt standard

150-HP at 5000 RPM

175-HP at 5000 RPM

200 at 5500 RPM

250 at 5000 RPM

4500-5500 RPM

4500-5500 RPM

5000-6000 RPM

4500-5500 RPM

14:26 (.54)/F-N-R

14:26 (.54)/F-N-R

14:26 (.54)/F-N-R

17:30 (.57)/F-N-R

2-triple-throat carbs

2 triple-throat carbs

4 carburetors, 6 throats

4 carburetors, 8 throats

35 amp with
voltage regulator35 amp with
voltage regulator35 amp with
voltage regulator35 amp with
voltage regulatorAutomatic throttle-
temperature controlledAutomatic throttle-
temperature controlledAutomatic throttle-
temperature controlledAutomatic throttle-
temperature controlled

ALL OUTBOARD MODELS

MAXIMUM BOAT HORSEPOWER: Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

FUEL FACTS: All 1992 Evinrude and Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-WII outboard lubricant.

If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-WII or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



I/O SPECIFICATIONS

ENGINE	3.0L	4.3L	5.0L-HO
Horsepower (crankshaft)	130	175	200
Horsepower (propshaft)	115	150	175
Displacement (Litres/Cubic inches)	3.0/181	4.3/262	5.0/302
Cylinders	4	6	8
Bore/Stroke (")	4.00 x 3.60	4.00 x 3.48	4.00 x 3.00
Compression Ratio	9.3:1	9.3:1	8.4:1
Main Bearings	5	4	5
Carburetion	2-Venturi, adj. low spd/fxd high spd jets	2-Venturi, adj. low spd/fxd high spd jets	2-Venturi, adj. low spd/fxd high spd jets
Choke	Automatic	Automatic	Automatic
Full Throttle Operating Range (in RPM's)	4200-4600	4200-4600	4000-4400
DRIVE UNIT			
Shift	Mech. F-N-R	Mech. F-N-R	Mech. F-N-R
Gear Ratio	1.86:1	1.68:1	1.59:1
Maximum Prop Diameter	15½"	15½"	15½"
DIMENSIONS			
Length	33 ¹⁵ / ₁₆ "	31 ³ / ₄ "	37 ⁵ / ₈ "
*Height - Above Crankshaft Centerline	19 ⁵ / ₈ "	19 ⁹ / ₁₆ "	19 ³ / ₄ "
Total Weight	650 lbs.	805 lbs.	906 lbs.
STANDARD OPTIONAL FEATURES			
Power Trim	STD	STD	STD
Power Steering	NA	STD	STD
Thru-Hub™ Exhaust	STD	STD	STD
Transom Mounting	STD	STD	STD
High Output Alternator	STD	STD	STD
4-Anode Saltwater Protection	STD	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD	STD
19-Step Metal Preparation	STD	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD	STD
CobraSkin™ High-Solid Paint Finish	STD	STD	STD
Hydraulic Shock Absorbers	STD	STD	STD
Easy Access Water Pump	STD	STD	STD
Stainless Steel Hell-Coil® Inserts	STD	STD	STD
Remote Oil Filter	NA	OPT	OPT
Engine Oil Cooler	NA	NA	NA
Thru-Transom Exhaust	NA	NA	NA
OMC 1+2® Extended Protection Plan	OPT	OPT	OPT
Counter Rotation	NA	Model Avail.	Model Avail.
Splitfire™ Electronic Eng Manage. Sys.	NA	NA	NA
<small>*Add 13½" for height above anti-ventilation plate</small>		<small>NA = Not Available</small>	




I/O SPECIFICATIONS

3.2L Diesel	5.8L	351CI	454 C.I.	502 C.I.
205	240	285	330	420
187	215	245	275	375
3.2/195	5.8/351	5.8/351	7.4/454	8.2/502
6	8	8	8	8
3.35 x 3.70	4.00 x 3.50	4.00 x 3.50	4.25 x 4.00	4.47 x 4.00
18.0:1	83:1	81.3:1	8.4:1	8.8:1
7	5	5	5	5
Electronic fuel injection	4-Venturi, adj. low spd/txd high spd jets	4-Venturi, adj. fuel high spd jets	Holley, 4-Venturi adj. low spd/txd high spd jets	Holley, 4-Venturi adj. low spd/txd high spd jets
	Automatic	Automatic	Automatic	Automatic
4000-4400	4000-4400	4600-5000	4200-4600	4800-5200
Mech. F-N-R	Mech. F-N-R	Mech. F-N-R	Mech. F-N-R	Mech. F-N-R
1.63:1	1.41:1	1.50:1	1.42:1	1.42:1
17"	15½"	17"	17"	17"
39⅝"	37⅝"	37⅝"	39⅝"	39⅝"
20⅞"	20⅞"	20⅞"	21½"	23½"
970 lbs.	976 lbs.	1075 lbs.	1155 lbs.	1155 lbs.
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	STD	STD	STD	STD
STD	OPT	STD	STD	STD
STD	NA	STD	STD	STD
NA	NA	OPT	OPT	OPT
OPT	OPT	OPT	OPT	OPT
STD	Model Avail.	STD	STD	STD
STD	NA	STD	STD	STD



DIMENSIONAL DATA

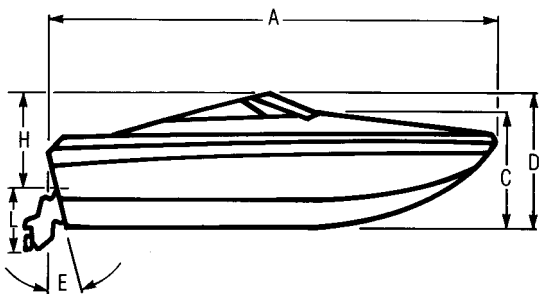

A. LOA
TRANSOM TO BOW

B. BEAM

C. KEEL TO W/S SHELF

D. TOTAL HEIGHT

E. TRANSOM ANGLE

F. DEAD RISE

G. OB TRANSOM HEIGHT


H. BRIDGE CLEARANCE

I. COCKPIT HEIGHT
STERN

J. COCKPIT
HEIGHT HELM


K. FREEBOARD

L. DRAFT





WINNING EDGESM



Four Winns' Exclusive Winning EdgeSM Owner Protection Plan.

Four Winns exclusive *Winning Edge* 5/3/1 Owner Protection Plan – standard on 1991 trailerable Four Winns stern drive boats – provides a 5-year hull structural warranty, 3-year warranty on the OMC Cobra® or OMC King Cobra® stern drive system (1-year limited warranty plus 2 years extended protection), and 1-year whole boat protection covering all major boat systems and components plus the Four Winns Sure Load™ trailer (where applicable) and on factory-installed Johnson® or Evinrude® outboard engines on Four Winns outboard-powered boats.

Term of coverage:

- Hull structural (5-years)
- Factory-installed stern drive power systems including engine blocks and internal parts, outdrives, electrical and controls, power steering and power trim and tilt (3-years)
- Factory pre-rigged Johnson® or Evinrude® outboard packages (1-year)*
 - Fuel system (1-year)
 - Electrical system (1-year)
 - Stereo system and speakers (1-year)
 - Instrumentation (1-year)
 - Wiring harness (1-year)
 - Four Winns Sure Load™ trailers (1-year)
 - Factory installed options (1-year)

Winning Edge is transferrable to subsequent owners for the balance of time remaining in the original program. To initiate a transfer, the new owner must provide Four Winns with a written request, a copy of the bill of sale, and a \$25 transfer fee.

In the event of a claim on the extended protection portion of the stern drive protection plan, the owner is responsible for the first \$25 of service, and for returning the boat to an authorized Four Winns or OMC stern drive servicing dealer.

All costs for repairs and/or parts on approved claims (other than the first \$25) will be paid by OMC up to the cash value of the covered part.

Parts installed on extended protection approved claims are warranted for 90 days or the time remaining in the original plan – whichever is longer. Should the replaced parts require further service, the \$25 service fee will be waived.

Four Winns 1991 express cruisers (285, 315, 325, and 365) and Quest by Four Winns fishing boats include 5-year hull structural, and a 1-year whole boat limited warranty. Two years extended warranty on engines, engine controls and drive systems is available at extra cost.

* 2-years extended protection available at extra cost