



TABLE OF CONTENTS

SPORTBOATS	PAGES
170 Horizon LE	4-9
180 Horizon LE	10-15
180 Horizon	16-19
190 Horizon	20-23
200 Horizon	24-29
210 Horizon	30-35
230 Horizon	36-41
260 Horizon	42-47
280 Horizon	48-53
<hr/>	
DECK BOATS	
214 Funship	56-61
234 Funship	62-67
254 Funship	68-73
<hr/>	
CUDDYS	
215 Sundowner	76-81
235 Sundowner	82-87
265 Sundowner	88-93
285 Sundowner	94-99
<hr/>	
CRUISERS	
248 Vista	102-107
268 Vista	108-113
298 Vista	114-117
328 Vista	118-121
338 Vista	122-125
<hr/>	
TRAILER SPECIFICATIONS	
Horizon Series	126-129
Horizon/Sundowner	130-133
Funship	134-136
Vista	137-138
IO SPECIFICATIONS	140-151
INBOARD SPECIFICATIONS	152-153
LE TROLLING MOTOR SPECIFICATIONS	154
OB SPECIFICATIONS	156-162
DIMENSIONAL DATA	163
WINNING EDGE	164-170



170 HORIZON LE

SPECIFICATIONS*	US	METRIC
LOA:	16'6"	5.03 m
LOA w/Extended Swim Platform:	17'6"	5.33 m
Storage Length:	19'5"	5.92 m
Beam:	7'6"	2.29 m
Keel to W/S Shelf:	41"	104 cm
Total Height:	4'7"	1.04 m
Total Height on Trailer:	6'1"	1.78 m
Transom Angle:	15°	15°
Deadrise:	18°	18°
OB Transom Height:	20"	51 cm
Bridge Clearance:	3'8"	1.12 m
Cockpit Height (stern):	27"	69 cm
Cockpit Height (helm):	27"	69 cm
Freeboard (min.):	(IO) 23" (OB) 25"	(IO) 58 cm (OB) 64 cm
Draft (drive down):	(IO) 30" (OB) 28"	(IO) 76 cm (OB) 71 cm
Draft (drive up):	(IO) 13" (OB) 11"	(IO) 33 cm (OB) 28 cm
Fuel:	24 gal	91 l
Persons Capacity:	(IO) 7 (OB) 7	(IO) 7 (OB) 7
Maximum Capacity:	(IO) 1150 (OB) 1850 lbs	(IO) 522(OB) 839 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
90 VL OB*	90	67	1790	812
115 VL OB*	115	86	1790	812
115 FSL OB**	115	86	1820	825
3.0 GS/SX	135	101	1950	884
4.3 GL/SX	190	142	2190	993

* Johnson® LE includes power tilt, trim & Oil Injection.

**Evinrude FPL FIGHT™ RAM Fuel Injection includes power tilt, trim and oil injection.

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
170HLE IO	3.0 GS/SX	1250	700	40	120	150	640
170HLE OB	115 VL	1410	320	40	120	150	640
KG							
170HLE IO	3.0 GS/SX	567	317	18	54	68	290
170HLE OB	115 VL	634	145	18	54	68	290



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
90 VL/90/67	14 x 19	36 x 48	AL	40-43	64-69	90	140
115 VL/115/86	14 x 19	36 x 48	AL	42-45	68-72	90	140
115 FSL/115/86	14 x 17	36 x 48	AL	41-44	66-71	110	177
3.0 GS/SX/135/101	14¹/₄ x 21	36 x 56	AL	38-41	61-66	90	140
4.3 GL/SX/190/142	14¹/₄ x 23	36 x 58	AL	49-52	79-84	110	177

FUEL FLOW DATA - 170 HORIZON LE WITH 90 VL / 90 / 67

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	2	19
2500	18	24	6	23
3000	23	37	7	27
3500	27	43	8	30
4000	30	48	9	34
4500	35	56	10	38
5000	40	64	11	42
WOT	41	66	12	45

FUEL FLOW DATA - 170 HORIZON LE WITH 115 VL / 115 / 86

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	2	19
2500	18	24	6	23
3000	23	37	7	27
3500	27	43	8	30
4000	30	48	10	38
4500	35	56	11	42
5000	41	66	12	45
WOT	43	69	14	53



FUEL FLOW DATA - 170 HORIZON LE WITH 115 FSL / 115 / 86

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	2	8
2500	18	24	3	11
3000	23	37	4	15
3500	27	43	5	19
4000	30	48	6	23
4500	35	56	9	34
5000	41	66	10	38
WOT	42	68	12	45

FUEL FLOW DATA - 170 HORIZON LE WITH 3.0GS / SX / 135 / 101

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	3	11
2500	19	31	4	15
3000	26	42	5	19
3500	32	52	7	27
4000	37	60	10	38
WOT	40	64	12	46

FUEL FLOW DATA - 170 HORIZON LE WITH 4.3GL/ SX / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	27
3500	35	56	10	38
4000	42	68	14	53
4500	47	76	16	61
WOT	50	80	18	68

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



170 HORIZON LE OPTIONS

- Fish 'N Ski Package (OB only): 12 volt trolling motor (44 lbs thrust), aft livewell, ski pylon, forward casting platform, rod holders, fish finder, built-in battery charger, removable windshield wings and fishing seats that double as aft jump seats
- Saltwater Fish 'N Ski Package (OB only): Aft livewell, ski pylon, forward casting platform, rod holders, fish finder, removable windshield wings and fishing seats that double as aft jump seats
- Graphics, sport
- Remote oil filter (4.3 GL only)
- Seat cushion, bow fill-ins
- Seating, regular bucket exchange for stbd lounge

- Seating, SunSport Interior
- Ski pylon (OB only)
- Stereo, Sony® AM/FM CD player (upgrade)
- Swim platform, extended

Canvas Options

- Bimini top
- Cockpit and forward cover
- Cockpit cover
- Convertible top
- Full canvas
- Mooring cover

Trailer Options

- Disc brakes, surge
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



180 HORIZON LE

SPECIFICATIONS*	US	METRIC
LOA:	18'0"	5.49 m
LOA w/Extended Swim Platform:	18'10"	5.74 m
Storage Length:	20'11"	6.38 m
Beam:	8'0"	2.44 m
Keel to W/S Shelf:	46"	1.17 m
Total Height:	5'0"	1.52 m
Total Height on Trailer:	6' 7"	1.96 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
OB Transom Height:	25"	64 cm
Bridge Clearance:	3'9"	1.14 m
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	30"	76 cm
Freeboard (min.):	(IO)28" (OB) 29"	(10) 71 cm / (OB) 74 cm
Draft (drive down):	(IO)31" (OB) 29"	(10) 79 cm / (OB) 74 cm
Draft (drive up):	(IO)14" (OB) 12"	(10) 36 cm / (OB) 30 cm
Fuel:	32 gal	121 l
Persons Capacity:	8	8
Maximum Capacity:	(IO) 1300 (OB) 2000 lbs	(IO) 590 (OB) 907 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
135 VX OB*	135	101	2100	952
150 VX OB*	150	112	2100	952
150 FPX OB**	150	112	2130	966
175 FPX OB**	175	131	2130	966
3.0GS/SX	135	101	2340	1060
4.3GL/SX	190	142	2480	1120
5.0GL/SX	220	164	2570	1170
5.0Gi/SX	250	187	2590	1180

* Johnson® PX includes power tilt, trim & Oil Injection

** Evinrude FPX FICHT™ RAM Fuel Injection includes power tilt, trim & Oil Injection.



RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
180HLE IO	4.3 GL/SX	1600	880	40	170	150	780(S)/880(T)
180HLE OB	150 VX	1720	380	40	170	150	780(S)/880(T)
KG							
180HLE IO	4.3 GL/SX	726	399	18	77	68	354(S)/399(T)
180HLE OB	150 VX	780	170	18	77	68	354(S)/399(T)

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
135 VX/135/101	14¹/₂ x 19	37 x 48	AL	41-44	66-71	110	177
150 VX/150/112	14¹/₂ x 19	37 x 48	AL	43-46	69-74	110	177
150 FPX/150/112	14¹/₂ x 19	37 x 48	AL	43-46	69-74	125	201
175 FPX/175/131	14¹/₂ x 19	37 x 48	AL	45-48	72-77	125	201
3.0GS/SX/135/101	14¹/₄ x 21	36 x 53	AL	36-39	58-63	110	177
4.3GL/SX/190/142	14¹/₄ x 23	36 x 58	AL	47-50	75-81	125	201
5.0GL/SX/220/164	14¹/₄ x 21	36 x 53	AL	50-53	81-85	125	201
5.0Gi/SX/250/187	14¹/₄ x 21	36 x 53	AL	53-56	85-90	125	201

FUEL FLOW DATA - 180 HORIZON LE WITH 135VX / 135 / 101

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	16	26	8	30
3000	23	37	10	38
3500	27	43	11	42
4000	32	51	12	45
4500	36	58	13	49
5000	39	63	14	53
5500	41	66	15	57
WOT	42	68	16	61



FUEL FLOW DATA - 180 HORIZON LE WITH 150VX / 150 / 112

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	4	15
2500	18	29	5	19
3000	25	40	6	23
3500	29	47	8	30
4000	34	55	10	38
4500	38	61	13	44
5000	42	68	16	61
WOT	44	71	17	64

FUEL FLOW DATA - 180 HORIZON LE WITH 150FPX / 150 / 112

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	3	11
2500	18	29	3	11
3000	25	40	4	15
3500	29	47	5	19
4000	34	55	7	27
4500	38	61	10	38
5000	42	68	14	53
WOT	44	71	15	57

FUEL FLOW DATA - 180 HORIZON LE WITH 175FPX / 175 / 181

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	3	11
2500	18	29	3	11
3000	25	40	4	15
3500	29	47	5	19
4000	34	55	7	27
4500	39	63	10	38
5000	43	69	15	57
WOT	46	74	17	64



FUEL FLOW DATA - 180 HORIZON LE WITH 3.0GS / SX / 135 / 101

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	3	11
2500	19	31	4	15
3000	26	42	5	19
3500	32	52	7	27
4000	36	58	10	38
WOT	38	61	12	46

FUEL FLOW DATA - 180 HORIZON LE WITH 4.3GL / SX / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	47	76	17	64
WOT	49	79	18	68

FUEL FLOW DATA - 180 HORIZON LE WITH 5.0GL / SX / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	45	72	13	49
4500	49	79	17	64
WOT	51	82	19	72

FUEL FLOW DATA - 180 HORIZON LE WITH 5.0Gi / SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	46	74	14	53
4500	51	82	19	72
WOT	54	87	21	80

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique. Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique



180 HORIZON LE OPTIONS

- Fish 'N Ski Package
12 volt trolling motor (44 lbs thrust), aft livewell, ski pylon, forward casting platform, rod holders, fish finder, built-in battery charger, removable windshield wings and fishing seats that double as aft jump seats
- Saltwater Fish 'N Ski Package
Aft livewell, ski pylon, forward casting platform, rod holders, fish finder, removable windshield wings and fishing seats that double as aft jump seats
- Graphics, sport
- Remote oil filter (N/A on 3.0 GS)
- Seat cushion, bow fill-ins
- Seating, flip-up bolsters (pair)
- Seating, flip-up bolster exchange for starboard lounge
- Seating, regular bucket exchange for starboard lounge
- Seating, SunSport Interior
- Ski pylon (OB only)
- Stereo, Sony® AM/FM CD player (upgrade)
- Swim platform, extended
- Canvas Options**
 - Bimini top
 - Cockpit and forward cover
 - Cockpit cover
 - Convertible top
 - Full canvas
 - Mooring cover
- Trailer Options**
 - Galvanized trailer
 - Spare tire and wheel
 - Spare tire and wheel, aluminum or galvanized
 - Wheel, aluminum (each)

CE Package

Export Package

International Package



180 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	18'6"	5.64 m
LOA w/Extended Swim Platform:	20'2"	6.15 m
Storage Length:	21'0"	6.40 m
Beam:	8'1"	2.44 m
Keel to W/S Shelf:	45"	1.17 m
Total Height:	4'10"	1.52 m
Total Height on Trailer:	6' 7"	1.96 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
OB Transom Height:	25"	64 cm
Bridge Clearance:	3'9"	1.14 m
Cockpit Height (stern):	27"	71 cm
Cockpit Height (helm):	29"	76 cm
Freeboard (min.):	26"	71 cm
Draft (drive down):	31"	79 cm
Draft (drive up):	14"	36 cm
Fuel:	38 gal	144 l
Persons Capacity:	8	8
Maximum Capacity:	1300 lbs	590 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
4.3GL/SX	190	142	2690	1220
5.0GL/SX	220	164	2790	1270
5.0Gi/SX	250	187	2800	1270

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
180H	5.0 GL/SX	1600	980	40	170	150	780(S)/880(T)
KG							
180H	5.0 GL/SX	726	444	18	77	68	354(S)/399(T)



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
4.3GL/SX/190/142	14¹/₄ x 23	36 x 58	AL	47-50	76-81	135	217
5.0GL/SX/220/164	14¹/₄ x 21	36 x 53	AL	50-53	81-85	135	217
5.0Gi/SX/250/187	14¹/₄ x 21	36 x 53	AL	53-56	85-90	135	217

FUEL FLOW DATA - 180 HORIZON WITH 4.3GL / SX / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	47	76	17	64
WOT	49	79	18	68

FUEL FLOW DATA - 180 HORIZON WITH 5.0GL / SX / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	45	72	13	49
4500	49	79	17	64
WOT	51	82	19	72

FUEL FLOW DATA - 180 HORIZON WITH 5.0Gi / SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	46	74	14	53
4500	51	82	19	72
WOT	54	87	21	80

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



180 HORIZON OPTIONS

- Graphics, sport
- Hour meter
- Prop, stainless (exchange)
- Remote oil filter
- Seat cushion, bow fill-ins
- Seating, flip-up bolster exchange for lounge
- Seating, SunSport Interior
- Swim platform, extended
- Wakeboard tower
- Walk-thru door

Canvas

- Bimini top
- Cockpit and forward cover
- Cockpit cover
- Convertible top
- Full canvas
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Tandem axle
- Wheel, aluminum (each)



190 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	19'6"	5.95 m
LOA w/Extended Swim Platform:	21'2"	6.45 m
Storage Length:	21'9"	6.63 m
Beam:	8'5"	2.57 m
Keel to W/S Shelf:	46"	1.17 m
Total Height:	4'11"	1.50 m
Total Height on Trailer	6'7"	2.01 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	3'9"	1.14 m
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	29"	74 cm
Freeboard (min.):	26"	66 cm
Draft (drive down):	32"	81 cm
Draft (drive up)**:	15"	38 cm
Fuel:	42 gal	159 l
Persons Capacity:	9	9
Maximum Capacity:	1450 lbs	658 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
4.3GL/SX	190	142	2860	1300
5.0GL/SX	220	164	2960	1340
5.0Gi/SX	250	187	2970	1350

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
190H	5.0GL/SX	1980	979	40	252	150	780(S)/900(T)
KG							
190H	5.0GL /SX	898	444	18	114	68	354(S)/408(T)

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
4.3GL/SX/190/142	14¹/₄ x 23	36 x 58	AL	46-49	74-79	140	225
5.0GL/SX/220/164	14¹/₄ x 21	36 x 53	AL	49-52	79-84	130	200
5.0Gi/SX/250/187	14¹/₄ x 21	36 x 53	AL	52-55	84-89	140	225



FUEL FLOW DATA - 190 HORIZON WITH 4.3 GL / SX / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	36	28	10	38
4000	42	68	14	53
WOT	47	76	18	68

FUEL FLOW DATA - 190 HORIZON WITH 5.0GL/SX / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	45	72	13	49
4500	49	79	17	64
WOT	51	82	19	72

FUEL FLOW DATA - 190 HORIZON WITH 5.0Gi/SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	46	74	14	53
4500	51	82	19	72
WOT	54	87	21	80

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



190 HORIZON OPTIONS

- Graphics, sport
- Hour meter
- Prop, stainless (exchange)
- Remote oil filter
- Seat cushion, bow fill-in
- Seating, flip-up bolster exchange for lounge
- Seating, SunSport Interior
- Swim platform, extended
- Table with mount
- Wakeboard tower
- Walk-thru door

CE Package

Export Package

International Package

Canvas Options

- Bimini top
- Cockpit and forward cover
- Cockpit cover
- Convertible top
- Full canvas
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Tandem axle
- Wheel, aluminum (each)



200 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	20'6"	6.25 m
LOA w/Extended Swim Platform:	22'3"	6.78 m
Storage Length:	22'2"	6.76 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	52"	1.32 m
Total Height:	5'6"	1.68 m
Total Height on Trailer	7'0"	2.13 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	4'3"	1.30 m
Cockpit Height (stern):	30"	76 cm
Cockpit Height (helm):	32"	81 cm
Freeboard (min.):	29"	74 cm
Draft (drive down):	34"	86 cm
Draft (drive up):	17"	43 cm
Fuel:	45 gal	170 l
Persons Capacity:	11	11
Maximum Capacity:	1600	730 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
5.0GL/SX	220	164	3090	1400
5.0GL/DP	220	164	3110	1410
5.0Gi/SX	250	187	3100	1410
5.0Gi/DP	250	187	3120	1420
5.7GS/SX	250	187	3090	1400
5.7GS/DP	250	187	3110	1410
5.7GSi/SX	280	209	3100	1410
5.7GSi/DP	280	209	3120	1420

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
200H	5.0 Gi/DP	2120	1000	60	210	150	780(S)/900(T)
KG							
200H	5.0 Gi/DP	961	454	27	95	68	354(S)408(T)



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0GL/SX/220/164	14¹/₂ x 19	37 x 48	AL	47-50	76-80	150	240
5.0GL/DP/220/164	F6	F6	SST	48-51	77-82	160	260
5.0Gi/SX/250/187	14¹/₂ x 19	37 x 48	AL	49-52	79-84	160	260
5.0Gi/DP/250/187	F6	F6	SST	50-53	80-85	160	260
5.7GS/SX/250/187	14¹/₂ x 19	37 x 48	AL	50-53	80-85	150	240
5.7GS/DP/250/187	F6	F6	SST	51-54	82-87	160	260
5.7GSi/SX/280/209	14³/₄ x 21	37 x 53	SST	54-57	87-92	160	260
5.7GSi/DP/280/209	F7	F7	SST	54-57	87-92	160	260

FUEL FLOW DATA - 200 HORIZON WITH 5.0GL/SX / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	26	42	6	23
3000	32	51	7	27
3500	37	59	9	34
4000	42	68	12	45
4500	46	74	18	68
WOT	49	79	19	72

FUEL FLOW DATA - 200 HORIZON WITH 5.0GL/DP / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	26	43	6	23
3000	34	55	7	27
3500	39	63	9	34
4000	44	69	12	45
4500	47	76	18	68
WOT	50	80	19	72

FUEL FLOW DATA - 200 HORIZON WITH 5.0Gi/SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	42	7	27
3000	32	52	9	34
3500	38	61	12	45
4000	42	68	17	64
4500	47	76	20	76
WOT	51	82	21	80



FUEL FLOW DATA - 200 HORIZON WITH 5.0Gi/DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	43	7	27
3000	34	55	9	34
3500	40	64	12	45
4000	44	71	17	64
4500	49	79	20	76
WOT	52	84	21	80

FUEL FLOW DATA - 200 HORIZON WITH 5.7GS/SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	43	8	30
3000	35	56	10	38
3500	41	66	13	49
4000	46	74	17	64
4500	50	81	21	80
WOT	52	84	22	83

FUEL FLOW DATA - 200 HORIZON WITH 5.7GS/DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	28	45	8	30
3000	38	61	10	38
3500	44	71	14	53
4000	48	77	18	68
WOT	53	85	22	83



FUEL FLOW DATA - 200 HORIZON WITH 5.7GSI/SX / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	43	8	30
3000	35	56	10	38
3500	41	66	13	49
4000	46	74	17	64
4500	51	82	21	80
WOT	56	90	23	87

FUEL FLOW DATA - 200 HORIZON WITH 5.7GSI/DP / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	28	45	8	30
3000	38	61	10	38
3500	44	71	14	53
4000	49	79	18	68
4500	53	85	21	80
WOT	56	90	23	87



200 HORIZON OPTIONS

- Engine flush-out kit
- Graphics, sport
- Hour meter
- Prop, stainless (exchange SX only)
- Remote oil filter
- Seat cushion, bow fill-in
- Seating, flip-up bolster exchange for lounge
- Seating, SunSport Interior
- Swim platform, extended
- Table with mount
- Wakeboard tower
- Walk-thru door
- Windshield wiper, starboard

Canvas Options

- Bimini top
- Cockpit and forward cover
- Cockpit cover
- Convertible top
- Full canvas
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Tandem axle
- Wheel, aluminum (each)

CE Package

Export Package

International Package



210 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	21'6"	6.55 m
LOA w/Extended Swim Platform::	23'0"	7.01 m
Storage Length:	23'2"	7.06 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	54"	1.37 m
Total Height:	5'10"	1.78 m
Total Height on Trailer	6'9"	2.24 m
Transom Angle:	15°	15°
Deadrise:	20°	20°
Bridge Clearance:	4'1"	1.24 m
Cockpit Height (stern):	30"	76 cm
Cockpit Height (helm):	31"	79 cm
Freeboard (min.):	29"	74 cm
Draft (drive down):	34"	86 cm
Draft (drive up):	17"	43 cm
Fuel:	50 gal	189 l
Persons Capacity:	11	11
Maximum Capacity:	1900	862 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
5.0GL/SX	220	164	3710	1680
5.0GL/DP	220	164	3730	1690
5.0Gi/SX	250	187	3720	1690
5.0Gi/DP	250	187	3740	1700
5.7GS/SX	250	187	3710	1680
5.7GS/DP	250	187	3730	1690
5.7GSi/SX	280	209	3720	1690
5.7GSi/DP	280	209	3740	1700
5.7GXi/SX	315	235	3720	1690
5.7GXi/DP	315	235	3740	1700

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
210H	5.0 Gi/DP	2740	1000	60	300	150	1074
KG							
210H	5.0 Gi/DP	1240	454	27	136	68	487



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0GL/SX/220/164	14¹/₂ x 19	37 x 48	AL	46-49	74-79	125	200
5.0GL/DP/220/164	F5	F5	SST	47-50	76-81	135	220
5.0Gi/SX/250/187	14¹/₂ x 19	37 x 48	AL	48-51	77-82	135	220
5.0Gi/DP/250/187	F5	F5	SST	49-52	79-84	145	230
5.7GS/SX/250/187	14¹/₂ x 19	37 x 48	AL	49-52	79-84	125	200
5.7GS/DP/250/187	F6	F6	SST	50-53	81-85	135	220
5.7GSi/SX/280/209	14³/₄ x 19	38 x 48	SST	53-56	82-87	135	220
5.7GSi/DP/280/209	F6	F6	SST	53-56	85-90	145	230
5.7GXi/SX/315/235	14³/₄ x 21	38 x 48	SST	55-58	89-94	135	220
5.7GXi/DP/315/235	F7	F7	SST	55-58	89-94	145	230

FUEL FLOW DATA - 210 HORIZON WITH 5.0GL/SX / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	5	19
2500	11	18	6	23
3000	26	42	8	30
3500	33	53	9	34
4000	39	63	12	45
4500	43	69	17	64
WOT	47	76	19	72

FUEL FLOW DATA - 210 HORIZON WITH 5.0GL/DP / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	19
2500	21	34	6	23
3000	28	45	8	30
3500	33	53	9	34
4000	40	64	12	45
4500	46	74	17	64
WOT	48	77	19	72

FUEL FLOW DATA - 210 HORIZON WITH 5.0Gi/SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	27	44	9	34
3500	34	55	10	38
4000	40	64	14	53
4500	45	72	18	68
WOT	49	79	21	80



FUEL FLOW DATA - 210 HORIZON WITH 5.0Gi/DP / 250 / 187

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	6	23
2500	21	34	7	27
3000	29	47	9	34
3500	34	55	10	38
4000	41	66	14	53
4500	46	74	18	68
WOT	50	81	21	80

FUEL FLOW DATA - 210 HORIZON WITH 5.7GS/SX / 250 / 187

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	8	13	6	23
2500	12	19	8	30
3000	27	44	10	38
3500	34	55	11	42
4000	40	64	14	53
4500	46	74	18	68
WOT	50	81	22	83

FUEL FLOW DATA - 210 HORIZON WITH 5.7GS/DP / 250 / 187

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	6	23
2500	21	34	8	30
3000	29	47	10	38
3500	34	55	11	42
4000	42	68	14	53
4500	47	76	18	68
WOT	51	82	22	83



FUEL FLOW DATA - 210 HORIZON WITH 5.7GSi/SX / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	28	45	9	34
3500	35	56	11	42
4000	42	68	15	57
4500	49	79	19	72
WOT	54	87	23	87

FUEL FLOW DATA - 210 HORIZON WITH 5.7GSi/DP / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	6	23
2500	21	34	7	27
3000	29	47	9	34
3500	35	56	11	42
4000	43	69	15	57
4500	49	79	19	72
WOT	54	87	23	87

FUEL FLOW DATA - 210 HORIZON WITH 5.7GXi/SX / 315 / 235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	13	21	8	30
3000	28	45	10	38
3500	35	56	12	45
4000	43	69	17	64
4500	50	81	21	79
WOT	56	90	24	91

FUEL FLOW DATA - 210 HORIZON WITH 5.7GXi/DP / 315 / 235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	6	23
2500	22	35	8	30
3000	30	48	10	38
3500	36	58	12	45
4000	44	71	17	64
4500	51	82	21	79
WOT	56	90	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



210 HORIZON OPTIONS

- Docking lights
- Engine flush-out kit
- Graphics, sport
- Hour meter
- Prop, stainless
- Remote oil filter
- Seat cushion, aft fill-in (with U-wrap)
- Seat cushion, bow fill-in
- Seating, U-wrap interior
- Shower aft
- Stereo remote with display at swim platform
- Swim platform, extended
- Table with mount
- Thru-transom exhaust, Quick & Quiet Plus
- Wakeboard tower
- Walk-thru door
- Windshield wiper, starboard

Canvas Options

- Bimini top
- Camper canvas
- Cockpit and forward cover
- Cockpit cover
- Convertible top
- Full canvas
- Mooring cover
- Windshield connector for bimini top (clear)

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



230 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	23'6"	7.16 m
LOA w/Extended Swim Platform:	24'10"	7.57 m
Storage Length:	25'2"	7.67 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	58"	1.47 m
Total Height:	6'3"	1.91 m
Total Height on Trailer:	7'9"	2.36 m
Transom Angle:	15°	15°
Deadrise:	20°	20°
Bridge Clearance:	4'7"	1.40 m
Cockpit Height (stern):	31"	78 cm
Cockpit Height (helm):	31"	78 cm
Freeboard (min.):	33"	83 cm
Draft (drive down):	35"	89 cm
Draft (drive up):	18"	45 cm
Fuel:	65 gal	246 l
Persons Capacity:	12	12
Maximum Capacity:	2500 lbs	1130 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
5.0Gi/SX	250	187	3950	1790
5.0Gi/DP	250	187	3970	1800
5.7GS/SX	250	187	3940	1790
5.7GS/DP	250	187	3960	1800
5.7GSi/SX	280	209	3950	1790
5.7GSi/DP	280	209	3970	1800
5.7GXi/SX	315	235	3950	1790
5.7GXi/DP	315	235	3970	1800
8.1 Gi/DP	375	280	4190	1900
7.4 GSi/DP	385	287	4170	1890

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
230H	5.7GSi/DP	2970	1000	60	390	150	1260
KG							
230H	5.7GSi/DP	1350	454	27	177	68	571



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0Gi/SX/250/187	14¹/₂ x 19	37 x 48	AL	43-46	69-74	180	290
5.0Gi/DP/250/187	F5	F5	SST	44-47	71-76	190	310
5.7GS/SX/250/187	14¹/₂ x 19	37 x 48	AL	44-47	71-76	170	270
5.7GS/DP/250/187	F6	F6	SST	45-48	72-77	180	290
5.7GSi/SX/280/209	14³/₄ x 19	38 x 48	SST	47-50	76-80	180	290
5.7GSi/DP/280/209	F6	F6	SST	47-50	76-80	190	310
5.7GXi/SX/315/235	14³/₄ x 19	38 x 48	SST	49-52	79-84	170	270
5.7GXi/DP/315/235	F6	F6	SST	49-52	79-84	180	290
7.4GSi/DP/385/287	F6	F6	SST	57-60	92-97	170	270
8.1Gi/DP/375/280	F7	F7	SST	57-60	92-97	170	270

FUEL FLOW DATA - 230 HORIZON WITH 5.0Gi/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	24	39	9	34
3500	30	48	10	38
4000	35	56	14	53
4500	40	64	18	68
WOT	44	71	21	79

FUEL FLOW DATA - 230 HORIZON WITH 5.0Gi/DP/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	16	26	7	27
3000	25	40	9	34
3500	31	50	10	38
4000	36	58	14	53
4500	41	66	18	68
WOT	45	72	21	79

FUEL FLOW DATA - 230 HORIZON WITH 5.7GS/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	26	42	10	38
3500	31	50	11	42
4000	36	58	14	53
4500	41	66	18	68
WOT	45	72	22	83



FUEL FLOW DATA - 230 HORIZON WITH 5.7GS/DP/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	20	32	7	27
3000	28	45	9	34
3500	32	52	11	42
4000	37	60	14	53
4500	42	69	18	68
WOT	46	74	22	83

FUEL FLOW DATA - 230 HORIZON WITH 5.7GSi/SX / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	27	43	9	34
3500	31	50	11	42
4000	36	58	15	57
4500	42	68	19	72
WOT	48	77	23	87

FUEL FLOW DATA - 230 HORIZON WITH 5.7GSi/DP / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	28	6	23
2500	20	32	7	27
3000	29	47	9	34
3500	34	55	11	42
4000	38	61	15	57
4500	43	69	19	72
WOT	48	77	23	87

FUEL FLOW DATA - 230 HORIZON WITH 5.7GXi/SX/315/235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	27	43	9	34
3500	32	52	11	42
4000	37	60	15	57
4500	43	69	19	72
WOT	50	81	24	91



FUEL FLOW DATA - 230 HORIZON WITH 5.7GX/DP/315/235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	28	6	23
2500	20	32	7	27
3000	29	47	9	34
3500	35	56	11	42
4000	39	63	15	57
4500	44	71	19	72
WOT	50	81	24	91

FUEL FLOW DATA - 230 HORIZON WITH 8.1Gi/DP/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	13	21	8	30
2500	25	42	10	38
3000	34	55	13	49
3500	42	67	17	64
4000	48	77	22	83
4500	56	90	26	98
WOT	58	93	30	113

FUEL FLOW DATA - 230 HORIZON WITH 7.4GSi/DP / 385 / 287

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	13	21	7	26
2500	25	40	9	34
3000	33	53	11	42
3500	40	64	15	57
4000	46	74	19	72
4500	53	85	26	98
WOT	58	93	30	113

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



230 HORIZON OPTIONS

- Batteries, dual with switch
- Cockpit entertainment center: sink with pressurized water system (7 gal/27 L), counter top, cooler storage and aft shower (N/A w/U-wrap)
- Cockpit refreshment center: dual batteries, refrigerator, sink with pressurized water system (7 gal/27 L), counter top, trash receptacle, and aft shower (N/A w/U-wrap)
- Docking lights
- Engine flush-out kit
- Graphics, sport
- Head, pump-out
- Hour meter
- Prop, stainless (exchange SX only)
- Remote oil filter (standard on 7.4 GSi and 8.1 Gi engines)
- Seat cushion, aft fill-in (with U-wrap)

- Seat cushion, bow fill-in
- Seating, double-wide lounger, port
- Seating, U-wrap interior
- Shower, aft
- Stereo remote with display at swim platform
- Swim platform, extended
- Table with mount
- Thru-transom exhaust, Quick & Quiet Plus
- Trim tabs, hydraulic
- Wakeboard tower
- Walk-thru door
- Windshield wiper, starboard

Canvas Options

- Bimini top
- Camper canvas
- Cockpit and forward cover
- Cockpit cover
- Convertible top
- Full canvas
- Mooring cover
- Windshield connector for bimini top (clear)

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



260 HORIZON

SPECIFICATIONS*	US	METRIC
LOA::	25'8"	7.82 m
LOA w/Extended Swim Platform:	28'1"	8.56 m
Storage Length:	27'4"	8.33 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	63"	1.60 m
Total Height:	6'6"	1.98 m
Total Height on Trailer:	8'4"	2.54 m
Transom Angle:	15°	150
Deadrise:	21°	21°
Bridge Clearance:	5'	1.52 m
Cockpit Height (stern):	32"	81 cm
Cockpit Height (helm):	32"	91 cm
Freeboard (min.):	36"	90 cm
Draft (drive down):	35"	89 cm
Draft (drive up):	18"	45 cm
Fuel:	80 gal	302 l
Persons Capacity:	14	14
Maximum Capacity:	2800 lbs	1270 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
5.7GS/SX	250	187	4570	2070
5.7GS/DP	250	187	4590	2080
5.7GSi/DP	280	209	4600	2090
5.7GXi/DP	315	235	4600	2090
8.1Gi/DP	375	280	4820	2190
7.4GSi/DP	385	287	4800	2180
8.2 GSi/DP	415	310	4800	2180
8.1GSi/DP	420	313	4820	2190

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
260H	5.7GXi/DP	3590	1000	60	480	200	1500
KG							
260H	5.7GXi/DP	1630	454	32	218	90	680



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.7GS/SX/250/187	15 x 17	38 x 43	AL	41-44	66-71	180	290
5.7GS/DP/250/187	F5	F5	SST	43-46	69-74	190	310
5.7GS/DP/280/209	F5	F5	SST	46-49	74-79	190	310
5.7GX/DP/315/235	F5	F5	SST	47-50	76-81	180	290
8.1Gi/DP/375/280	F6	F6	SST	52-55	84-89	180	290
7.4GS/DP/385/287	F5	F5	SST	52-55	84-89	180	290
8.2GS/DP/415/310	F6	F6	SST	54-57	87-92	180	290
8.1GS/DP/420/313	F6	F6	SST	54-57	87-92	180	295

FUEL FLOW DATA - 260 HORIZON WITH 5.7GS/SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	18	29	8	30
3000	25	40	9	34
3500	32	52	11	42
4000	37	60	14	53
4500	40	64	18	68
WOT	42	68	22	83

FUEL FLOW DATA - 260 HORIZON WITH 5.7GS/DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	20	32	8	30
3000	28	45	10	38
3500	34	54	11	42
4000	39	64	14	53
4500	42	68	18	68
WOT	44	71	22	83



FUEL FLOW DATA - 260 HORIZON WITH 5.7GSi/DP / 280 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	21	34	8	30
3000	29	46	9	34
3500	35	56	11	41
4000	40	64	16	61
4500	44	71	20	76
WOT	47	76	23	87

FUEL FLOW DATA - 260 HORIZON WITH 5.7GXi/DP / 315 / 235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	21	34	9	34
3000	30	48	10	38
3500	35	56	12	45
4000	40	64	17	64
4500	45	72	21	79
WOT	48	77	24	91

FUEL FLOW DATA - 260 HORIZON WITH 8.1Gi/DP / 375 / 280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	22	35	9	34
3000	34	55	12	45
3500	40	64	16	60
4000	46	74	20	76
4500	51	82	26	98
WOT	53	85	30	113

FUEL FLOW DATA - 260 HORIZON WITH 7.4GSi/DP / 385 / 287

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	7	26
2500	22	35	9	34
3000	32	52	11	42
3500	38	61	15	57
4000	43	69	19	72
4500	48	77	26	98
WOT	53	85	30	113



FUEL FLOW DATA - 260 HORIZON WITH 8.2 GSi/DP / 415 / 310

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	12	19	8	30
2500	24	39	9	34
3000	31	50	12	45
3500	39	63	16	60
4000	45	72	20	76
4500	51	82	27	102
WOT	55	89	32	121

FUEL FLOW DATA - 260 HORIZON WITH 8.1 GSi/DP / 420 / 313

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	22	35	9	34
3000	34	55	12	45
3500	40	64	16	60
4000	46	74	20	76
4500	52	84	27	102
WOT	55	89	32	121

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



260 HORIZON OPTIONS

- Batteries, dual with switch
- Cockpit entertainment center: sink with pressurized water system (7 gal/27 L), counter top, cooler storage and aft shower (N/A w/U-wrap)
- Cockpit refreshment center: dual batteries, refrigerator, sink with pressurized water system (7 gal/27 L), counter top, and trash receptacle, and aft shower (N/A w/U-wrap)
- Docking lights
- Engine flush-out kit
- Graphics, sport
- Head, pump-out
- Hour meter
- Prop, stainless (exchange SX only)
- Remote oil filter (standard on 7.4 GSi, 8.1 Gi, 8.1 GSi and 8.2 GSi engines)
- Seat cushion, aft fill-in (with U-wrap)
- Seat cushion, bow fill-in
- Seating, double-wide lounger, port
- Seating, U-wrap interior
- Shower, aft
- Stereo remote with display at swim platform
- Swim platform, extended
- Table with mount
- Thru-transom exhaust, Quick & Quiet Plus
- Trim tabs, hydraulic
- Walk-thru door
- Windshield wiper, starboard

Canvas Options

- Camper canvas
- Cockpit and forward cover
- Cockpit cover
- Mooring cover
- Windshield connector for bimini top (clear)

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



280 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	27'9"	8.46 m
LOA w/Extended Swim Platform:	30'1"	9.17 m
Beam:	9'4"	2.85 m
Keel to W/S Shelf:	70"	1.78 m
Total Height:	7'2"	2.18 m
Total Height on Trailer:	9'0"	2.74 m
Transom Angle:	15°	15°
Deadrise:	21°	21°
Bridge Clearance:	5'	1.52 m
Cockpit Height (stern):	31"	78 cm
Cockpit Height (helm):	37"	93 cm
Freeboard (min.):	36"	90 cm
Draft (drive down):	37"	94 cm
Draft (drive up):	18"	45 cm
Fuel:	130	491 l
Persons Capacity:	15	15
Maximum Capacity:	yacht	Yacht

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
8.1Gi/DP	375	280	5820	2640
7.4GSi/DP	385	287	5800	2630
8.2 GSi/DP	415	310	5800	2630
8.1 GSi/DP	420	313	5820	2640
Twin 5.0 Gi/SX	250 EA	187 EA	6700	3040
Twin 5.7 GSi/SX	280 EA	209 EA	6700	3040
Twin 5.7 GX/SX	315 EA	235 EA	6700	3040

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
280H	Twin 5.0Gi/SX	4740	1960	120	780	200	1690
KG							
280H	Twin 5.0Gi/SX	2150	889	64	354	90	766



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
8.1Gi/DP/375/280	F5	F5	SST	47-50	76-81	200	320
7.4GSi/DP/385/287	F4	F4	SST	47-50	76-81	200	320
8.2GSi/DP/415/310	F5	F5	SST	50-53	81-85	200	320
8.1GSi/DP/420/313	F5	F5	SST	50-53	81-85	200	320
Twin 5.0Gi/SX/250/187	14³/₄ x 21	37 x 53	SST	55-58	89-93	180	290
Twin 5.7GSi/DP/280/209	14³/₄ x 21	37 x 53	SST	57-60	92-97	180	290
Twin 5.7GXi/SX/315/235	14³/₄ x 21	37 x 53	SST	59-62	95-100	180	290

FUEL FLOW DATA - 280 HORIZON WITH 8.1Gi/DP / 310 / 231

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	7	26
2500	17	27	9	34
3000	25	40	12	45
3500	32	52	17	64
4000	39	63	21	79
4500	46	74	25	95
WOT	48	77	30	113

FUEL FLOW DATA - 280 HORIZON WITH 7.4GSiDP / 385 / 287

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	7	26
2500	18	29	9	34
3000	27	43	11	42
3500	34	55	15	57
4000	39	63	19	72
4500	44	71	26	98
5000	47	76	28	106
WOT	48	77	30	113

FUEL FLOW DATA - 280 HORIZON WITH 8.2GSi/DP / 415 / 310

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	19	31	9	34
3000	28	45	12	45
3500	35	56	16	60
4000	41	66	20	76
4500	46	74	27	102
WOT	51	82	32	121



FUEL FLOW DATA - 280 HORIZON WITH 8.1GSi/DP/420/313

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	19	31	9	34
3000	28	45	12	45
3500	35	56	16	60
4000	41	66	20	76
4500	46	74	27	102
WOT	51	82	32	121

FUEL FLOW DATA - 280 HORIZON WITH TWIN 5.0Gi/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	12	45
2500	18	29	14	53
3000	29	47	18	68
3500	37	60	20	76
4000	43	69	28	106
4500	50	80	36	136
WOT	56	90	42	159

FUEL FLOW DATA - 280 HORIZON WITH TWIN 5.7GSi/SX/280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	12	45
2500	18	29	14	53
3000	30	48	18	68
3500	38	61	22	83
4000	45	72	30	113
4500	53	85	38	144
WOT	58	93	46	174

FUEL FLOW DATA - 280 HORIZON WITH TWIN 5.7GXi/SXi/315/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	12	45
2500	18	29	14	53
3000	30	48	18	68
3500	38	61	22	83
4000	45	72	30	113
4500	52	84	40	151
WOT	60	95	48	181

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



280 HORIZON OPTIONS

- CD changer, 10 disc
- Docking lights
- Engine flush-out kit
- Graphics, sport
- Grey water system with holding tank
- Hour meter
- Seat cushion, aft fill-in
- Seat cushion, bow fill-in
- Stereo remote with display at swim platform
- Swim platform, extended
- Table with mount
- Thru-transom exhaust, Quick & Quiet Plus
- VHF radio
- Walk-thru door
- Windlass with rope, chain and anchor

Canvas Options

- Camper canvas
- Cockpit and forward cover
- Cockpit cover
- Mooring cover
- Windshield connector for bimini top (clear)

Trailer Options

- Sure-Load™ custom matched tandem axle trailer with tandem disc brakes
- Tri-axle trailer with tri-axle brakes (req. with twin engines)
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



214 FUNSHIP

SPECIFICATIONS*	US	METRIC
LOA:	20'11"	6.25 m
Storage Length:	23'8"	7.22 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	52"	1.32 m
Total Height:	5'3"	1.60 m
Total Height on Trailer:	7'4"	2.24 m
Transom Angle:	14°	14°
Deadrise:	19°	19°
OB Transom Height	25"	64 cm
Bridge Clearance:	3'11"	1.19 m
Cockpit Height (stern):	31"	79 cm
Cockpit Height (helm):	33"	84 cm
Freeboard (min.):	31"	79 cm
Draft (drive down):	30"	78 cm
Draft (drive up):	13"	33 cm
Fuel:	50 gal.	189 l
Persons Capacity:	13	13
Maximum Capacity:	(10)2000 lbs(0B)2950 lbs	(10)407 kg (0B)1340 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBs	KG
150VX OB*	150	112	2980	1350
150FPX OB**	150	112	3020	1370
175FPX OB**	175	131	3020	1370
5.0GL/SX	220	164	3610	1640
5.0Gi/SX	250	187	3620	1640
5.0Gi/DP	250	187	3640	1650
5.7GS/SX	250	187	3610	1640
5.7GS/DP	250	187	3630	1650
5.7GSi/SX	280	209	3620	1640
5.7GSi/DP	280	209	3640	1650

* Johnson® PX includes power tilt, trim & Oil Injection.

** Evinrude FPX FICHT™ RAM Fuel Injection inclosed, power tilt, trim & Oil Injection.



RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trailer Wt.
LBS							
214FS IO	5.0Gi/SX	2640	980	60	300	150	1160
214FS OB	175FPX	2610	410	60	300	150	1160
KG							
214FS IO	5.0Gi/SX	1150	444	27	136	68	526
214FS OB	175FPX	1180	186	27	136	68	526

PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
150VX/150/112	14¹/₂ x 19	36 x 48	AL	41-44	66-71	100	161
150FPX/150/112	14¹/₂ x 19	36 x 48	AL	41-44	66-71	120	193
175FPX/175/131	14¹/₂ x 19	36 x 48	AL	43-46	69-74	120	193
5.0GL/SX/220/164	14¹/₂ x 19	36 x 48	AL	44-47	71-76	120	193
5.0Gi/SX/250/187	14¹/₂ x 19	36 x 48	AL	46-49	74-79	120	193
5.0Gi/DP/250/187	F5	F5	SST	47-50	76-81	120	193
5.7GS/SX/250/187	14¹/₂ x 19	36 x 48	AL	47-50	76-81	120	193
5.7GS/DP/250/187	F6	F6	SST	48-51	77-82	120	193
5.7GSi/SX/280/209	14³/₄ x 19	37 x 48	SST	51-54	82-87	120	193
5.7GSi/DP/280/209	F6	F6	SST	51-54	82-87	120	193

FUEL FLOW DATA - 214 FUNSHIP WITH 150VX / 150 / 112

Engine Speed - RPM MPH	Boat Speed KPH	GPH	Fuel Flow LPH	
2000	9	14	5	19
2500	18	29	6	23
3000	26	42	7	27
3500	31	50	9	34
4000	34	55	11	42
4500	38	61	13	49
5000	42	68	16	61
WOT	45	72	18	68

FUEL FLOW DATA - 214 FUNSHIP WITH 150FPX / 150 / 112

Engine Speed - RPM MPH	Boat Speed KPH	GPH	Fuel Flow LPH	
2000	9	14	5	19
2500	18	29	6	23
3000	26	42	6	23
3500	31	50	8	30
4000	34	55	10	38
4500	38	61	12	45
5000	42	68	15	61
WOT	45	72	17	64



FUEL FLOW DATA - 214 FUNSHIP WITH 175FPX / 175 / 131

Engine Speed - RPM MPH	Boat Speed		Fuel Flow	
	KPH	GPH	LPH	
2000	9	14	5	19
2500	18	29	6	23
3000	26	42	6	23
3500	31	50	8	30
4000	34	55	10	38
4500	38	61	12	45
5000	42	68	15	61
WOT	45	72	17	64

FUEL FLOW DATA - 214 FUNSHIP WITH 5.0GL/SX / 220 / 164

Engine Speed - RPM MPH	Boat Speed		Fuel Flow	
	KPH	GPH	LPH	
2000	7	11	6	23
2500	18	29	7	26
3000	25	40	10	38
3500	33	53	13	49
4000	40	64	15	57
WOT	45	72	19	72

FUEL FLOW DATA - 214 FUNSHIP WITH 5.0Gi / SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	6	23
2500	18	29	7	26
3000	25	40	10	38
3500	33	53	13	49
4000	40	64	15	57
4500	45	72	19	72
WOT	48	78	21	79

FUEL FLOW DATA - 214 FUNSHIP WITH 5.0Gi/ DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	19	30	7	26
3000	27	44	10	38
3500	35	56	13	49
4000	41	66	15	57
4500	46	74	19	72
WOT	49	79	21	79



FUEL FLOW DATA - 214 FUNSHIP WITH 5.7GS/ SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	19	72
2500	18	29	7	26
3000	25	42	10	38
3500	34	55	14	53
4000	42	68	16	61
WOT	48	77	22	83

FUEL FLOW DATA - 214 FUNSHIP WITH 5.7GS / DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	20	32	7	27
3000	28	45	10	38
3500	35	56	13	49
4000	43	69	17	64
WOT	49	79	22	83

FUEL FLOW DATA - 214 FUNSHIP WITH 5.7 GSi/SX / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	18	29	7	27
3000	26	42	10	38
3500	34	55	14	53
4000	42	68	17	64
4500	49	79	20	76
WOT	52	84	23	87

FUEL FLOW DATA - 214 FUNSHIP WITH 5.7 GSi/DP / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	20	32	7	27
3000	28	45	10	38
3500	36	58	14	53
4000	44	71	17	64
4500	50	81	20	76
WOT	53	85	23	87

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



214 FUNSHIP OPTIONS

- Engine flush-out kit*
- Graphics, sport
- Head, pump-out
- Hour meter*
- Prop, stainless
(exchange SX only)
- Remote oil filter*
- Seat cushions, bow
fill-in
- Shower, forward
- Ski pylon (OB only)
- Stereo remote with
display at swim
platform, aft
- Table with floor
mount, forward

* 214 I/O only

CE Package

Export Package

International Package

Canvas Options

- Cockpit cover
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel,
aluminum or
galvanized
- Wheel, aluminum
(each)



234 FUNSHIP

SPECIFICATIONS*	US	METRIC
LOA w/Extended Swim Platform:	24'3"	7.39 m
LOA:	22'6"	6.86 m
Storage Length:	24'3"	7.39 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	57"	1.45 m
Total Height:	5'11"	1.80 m
Total Height on Trailer:	7'5"	2.26 m
Transom Angle:	13°	13°
Deadrise:	15°	15°
Bridge Clearance:	4'9"	1.45 m
Cockpit Height (stern):	26"	66 cm
Cockpit Height (helm):	31"	79 cm
Freeboard (min.):	26"	66 cm
Draft (drive down):	32"	81 cm
Draft (drive up):	15"	38 cm
Fuel:	73 gal.	276 l
Persons Capacity:	13	13
Maximum Capacity:	1950 lbs	884 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.0GL/SX	220	164	4260	1930
5.0Gi/SX	250	187	4270	1940
5.0Gi/DP	250	187	4290	1950
5.7GS/SX	250	187	4260	1930
5.7GS/DP	250	187	4280	1940
5.7GSi/SX	280	209	4270	1940
5.7GSi/DP	280	209	4290	1950

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trailer Wt.
LBS							
234FS	5.0Gi/SX	3290	980	60	438	150	1280
KG							
234FS	5.0Gi/SX	1490	444	27	199	68	581



PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0GL/SX/220/164	14¹/₂ x 19	36 x 48	AL	43-46	69-74	180	290
5.0Gi/SX/250/187	14¹/₂ x 19	36 x 48	AL	45-48	72-77	180	290
5.0Gi/DP/250/187	F5	F5	SST	46-49	74-79	180	290
5.7GS/SX/250/187	14¹/₂ x 19	36 x 48	AL	46-49	74-79	180	290
5.7GS/DP/250/187	F6	F6	SST	47-50	76-81	180	290
5.7GSi/SX/280/209	14³/₄ x 19	37 x 48	SST	50-53	81-85	180	290
5.7GSi/DP/280/209	F6	F6	SST	50-53	81-85	180	290

FUEL FLOW DATA - 234 FUNSHIP WITH 5.0GL/SX/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	6	23
2500	18	29	7	26
3000	25	40	10	38
3500	33	53	13	49
4000	40	64	15	57
WOT	45	72	19	72

FUEL FLOW DATA - 234 FUNSHIP WITH 5.0Gi/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	14	5	19
2500	14	31	6	23
3000	27	43	10	38
3500	34	55	12	45
4000	40	64	15	57
4500	45	72	19	72
WOT	47	76	21	79

FUEL FLOW DATA - 234 FUNSHIP WITH 5.0Gi/DP/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	19	30	7	26
3000	27	44	10	38
3500	35	56	13	49
4000	41	66	15	57
4500	45	72	19	72
WOT	48	77	21	79



FUEL FLOW DATA - 234 FUNSHIP WITH 5.7GS/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	20	32	7	26
3000	28	45	11	42
3500	35	56	13	49
4000	42	68	16	60
4500	47	76	21	79
WOT	48	77	22	83

FUEL FLOW DATA - 234 FUNSHIP WITH 5.7GS/DP / 250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	22	35	7	20
3000	30	48	11	42
3500	37	60	13	49
4000	43	69	16	60
4500	48	77	21	79
WOT	49	79	22	83

FUEL FLOW DATA - 234 FUNSHIP WITH 5.7GSi/SX / 280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	21	34	7	22
3000	30	48	11	42
3500	37	60	13	49
4000	44	71	16	60
4500	49	79	21	79
WOT	51	82	23	87

FUEL FLOW DATA - 234 FUNSHIP WITH 5.7GSi/DP / 280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	23	37	7	22
3000	31	50	11	42
3500	39	63	13	49
4000	45	72	16	60
4500	50	80	21	79
WOT	52	84	22	87

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



234 FUNSHIP OPTIONS

- Engine flush-out kit
- Graphics, sport
- Head, pump-out
- Hour meter
- Prop, stainless (exchange SX only)
- Remote oil filter
- Seat cushions, bow fill-in
- Shower, forward and aft
- Stereo remote with display at swim platform, aft
- Table with floor mount, forward
- Walk-thru door

CE Package

Export Package

International Package

Canvas Options

- Cockpit and forward cover
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)



254 FUNSHIP

SPECIFICATIONS*	US	METRIC
LOA w/Extended Swim Platform:	27'4"	8.33 m
LOA:	25'6"	7.77 m
Beam:	8'6"	2.59 m
Storage Length:	27'4"	8.33 m
Keel to W/S Shelf:	60"	1.52 m
Total Height:	6'2"	1.88 m
Total Height on Trailer:	8'0"	2.44 m
Transom Angle:	14°	14°
Deadrise:	19°	19°
Bridge Clearance:	5'0"	1.52 m
Cockpit Height (stern):	26"	66 cm
Cockpit Height (helm):	31"	79 cm
Freeboard (min.):	28"	71 cm
Draft (drive down):	33"	84 cm
Draft (drive up):	16"	41 cm
Fuel:	73 gal.	276 l
Persons Capacity:	15	15
Maximum Capacity:	2300 lbs	1040 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.7GS/SX	250	187	5070	2300
5.7GS/DP	250	187	5090	2310
5.7GSi/DP	280	209	5100	2310
5.7GXi/DP	315	235	5100	2310

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trailer Wt.
LBS							
254FS	5.7GSi/DP	4100	1000	60	438	150	1650
KG							
254FS 10	5.7GSi/DP	1860	454	27	199	68	749



PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.7GS/SX/250/187	14½ x 19	36 x 48	AL	42-45	68-72	160	260
5.7GS/DP/250/187	F5	F5	SST	43-46	69-74	160	260
5.7GSi/DP/280/209	F5	F5	SST	45-48	72-77	160	260
5.7GXi/DP/315/235	F5	F5	SST	46-49	74-79	160	260

FUEL FLOW DATA - 254 FUNSHIP WITH 5.7GS/SX / 250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	14	5	19
2500	20	32	6	23
3000	25	40	7	27
3500	31	50	10	38
4000	37	60	13	49
4500	42	68	17	64
WOT	44	71	22	83

FUEL FLOW DATA - 254 FUNSHIP WITH 5.7GS/DP / 250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	22	35	6	23
3000	29	47	7	27
3500	35	56	10	38
4000	40	64	13	49
4500	44	71	17	64
WOT	45	72	22	83



FUEL FLOW DATA - 254 FUNSHIP WITH 5.7GSi/DP / 280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	23	37	6	23
3000	29	47	7	26
3500	35	56	10	38
4000	40	64	13	49
4500	44	71	17	64
WOT	47	76	23	87

FUEL FLOW DATA - 254 FUNSHIP WITH 5.7GXi/DP / 315/235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	23	37	6	23
3000	29	47	7	26
3500	35	56	10	38
4000	40	64	14	53
4500	44	71	18	68
WOT	48	77	24	91



254 FUNSHIP OPTIONS

- Engine flush-out kit
- Graphics, sport
- Head, pump-out
- Hour meter
- Prop, stainless (exchange SX only)
- Refrigerator (includes dual battery switch)
- Remote oil filter
- Seat cushions, bow fill-in
- Shower, forward and aft
- Stereo remote with display at swim platform, aft
- Table with floor mount, forward
- Walk-thru door

Canvas Options

- Cockpit and forward cover
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



215 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	21'6"	6.55 m
LOA w/Extended Swim Platform:	23'0"	7.01 m
Storage Length:	23'2"	7.06 m
Maximum Sleeping Depth:	74"	1.88 m
Maximum Sleeping Width:	68"	1.73 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	56"	1.42 m
Total Height:	6'0"	1.83 m
Total Height on Trailer:	7'9"	2.36 m
Transom Angle:	15°	15°
Deadrise:	20°	20°
Bridge Clearance:	4'9"	1.45 m
Cabin Height	4'2"	1.27 m
Cockpit Height (stern):	32"	81 cm
Cockpit Height (helm):	35"	89 cm
Freeboard (min.):	32"	81 cm
Draft (drive down):	34"	86 cm
Draft (drive up):	16"	41 cm
Fuel:	50 gal	189 l
Persons Capacity:	11	11
Maximum Capacity:	1900 lbs	862 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.0GL/SX	220	164	3680	1670
5.0GL/DP	220	164	3700	1680
5.0Gi/SX	250	187	3690	1670
5.0Gi/DP	250	187	3710	1680
5.7GS/SX	250	187	3680	1670
5.7GS/DP	250	187	3700	1680
5.7GSi/SX	280	209	3690	1670
5.7GSi/DP	280	209	3710	1680
5.7GXi/SX	315	235	3690	1670
5.7GXi/DP	315	235	3710	1680



RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
215S	5.0Gi/DP	2710	1000	60	300	150	1074
KG							
215S	5.0Gi/DP	1230	454	27	136	68	487

PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0GL/SX/220/164	14¹/₂ x 19	37 x 48	AL	46-49	74-79	125	200
5.0GL/DP/220/164	F5	F5	SST	47-50	76-81	135	220
5.0Gi/SX/220/164	14¹/₂ x 19	37 x 48	AL	48-51	77-82	135	220
5.0Gi/DP/250/187	F5	F5	AL	49-52	79-824	145	230
5.7GS/SX/250/187	14¹/₂ x 19	37 x 48	AL	49-52	79-84	125	200
5.7GS/DP/250/187	F6	F6	SST	50-53	81-85	135	200
5.7GSi/SX/280/209	14³/₄ x 19	37 x 48	SST	53-56	85-90	135	220
5.7GSi/DP/280/209	F6	F6	SST	53-56	85-90	145	230
5.7GXi/SX/315/235	14³/₄ x 21	37 x 53	SST	55-58	89-93	135	220
5.7GXi/DP/315/235	F7	F7	SST	55-58	89-93	145	230

FUEL FLOW DATA - 215 SUNDOWNER WITH 5.0 GL/SX/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	5	19
2500	11	18	6	23
3000	26	42	8	31
3500	33	53	9	34
4000	39	63	13	45
4500	43	69	17	64
WOT	47	76	19	72

FUEL FLOW DATA - 215 SUNDOWNER WITH 5.0 GL/DP/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	19
2500	21	34	6	23
3000	28	45	8	31
3500	33	53	9	34
4000	40	64	12	45
4500	46	74	17	64
WOT	48	77	19	72



FUEL FLOW DATA - 215 SUNDOWNER WITH 5.0 Gi/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	27	44	9	34
3500	34	55	10	38
4000	40	64	14	53
4500	45	72	18	68
WOT	49	79	21	80

FUEL FLOW DATA - 215 SUNDOWNER WITH 5.0 Gi/DP/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	21	34	7	27
3000	29	47	9	34
3500	34	55	10	38
4000	41	66	14	53
4500	46	74	18	68
WOT	50	80	21	80

FUEL FLOW DATA - 215 SUNDOWNER WITH 5.7 GS/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	8	30
3000	27	44	10	38
3500	34	55	11	42
4000	40	63	14	53
4500	46	74	18	68
WOT	50	80	22	83

FUEL FLOW DATA - 215 SUNDOWNER WITH 5.7 GS/DP/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	21	34	8	30
3000	29	47	10	38
3500	34	55	11	42
4000	42	68	14	53
4500	47	76	18	68
WOT	51	82	22	83



FUEL FLOW DATA - 215 SUNDOWNER WITH 5.7GSi/SX/280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	28	45	9	34
3500	35	56	11	42
4000	42	68	15	57
4500	49	79	19	72
WOT	54	87	23	87

FUEL FLOW DATA - 215 SUNDOWNER WITH 5.7 GSi/DP/280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	6	23
2500	21	34	7	27
3000	29	47	9	34
3500	35	56	11	42
4000	43	69	15	57
4500	49	79	19	72
WOT	54	87	23	87

FUEL FLOW DATA - 215 SUNDOWNER WITH 5.7GXi/SX/315/235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	28	45	9	34
3500	35	56	11	42
4000	43	69	16	60
4500	50	81	20	76
WOT	56	90	24	91

FUEL FLOW DATA - 215 SUNDOWNER WITH 5.7 GXi/DP/315/235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	6	23
2500	21	34	7	27
3000	30	48	9	34
3500	36	58	11	42
4000	44	71	16	60
4500	51	82	20	76
WOT	56	90	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



215 SUNDOWNER OPTIONS

- Bow rails, raised
- Docking lights
- Engine flush-out kit
- Graphics, sport
- Head, pump-out
- Hour meter
- Prop, stainless
- Remote oil filter (exchange SX only)
- Seat cushion, aft fill-in (with U-wrap only)
- Seating, U-wrap interior
- Shower, aft
- Stereo remote with display at swim platform
- Stove, one burner, butane
- Swim platform, extended
- Table with mount
- Thru-transom exhaust, Quick & Quiet Plus
- Windshield wiper, starboard

Canvas Options

- Camper canvas
- Cockpit cover
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



235 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA w/o Swim Platform:	23'6"	7.16 m
LOA w/Extended Swim Platform:	24'10"	7.57 m
Storage Length:	25'2"	7.67 m
Maximum Sleeping Depth:	75"	1.91 m
Maximum Sleeping Width:	70"	1.78 m
Beam:	8'6"	2.54 m
Keel to W/S Shelf:	60"	1.52 m
Total Height:	6'5"	1.95 m
Total Height on Trailer:	7'11"	2.41 m
Transom Angle:	15°	15°
Deadrise:	20°	20°
Bridge Clearance:	4'11"	1.50 m
Cabin Height	4'4"	1.32 m
Cockpit Height (stern):	29"	74 cm
Cockpit Height (helm):	38"	97 cm
Freeboard (min.):	38"	97 cm
Draft (drive down):	35"	89 cm
Draft (drive up):	18"	45 cm
Fuel:	65 gal	246 l
Persons Capacity:	12	12
Maximum Capacity:	2500 lbs	1130 kg

Dimensional Diagram is located on page 164.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.0Gi/SX	250	187	3960	1800
5.0Gi/DP	250	187	3980	1800
5.7GS/SX	250	187	3950	1790
5.7GS/DP	250	187	3970	1800
5.7GSi/SX	280	209	3960	1800
5.7GSi/DP	280	209	3980	1800
5.7 GXi/SX	315	235	3960	1800
5.7 GXi/DP	315	235	3980	1800
8.1Gi/DP	375	280	4200	1900
7.4 GSi/DP	385	287	4180	1900

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
235S	5.7Si/DP	2980	1000	60	390	150	1260
KG							
235S	5.7Si/DP	1350	454	27	177	68	571



PERFORMANCE

Power HP/KW	Propeller Dia x Pitch		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0Gi/SX/250/187	14¹/₂ x 19	37 x 48	AL	43-46	69-74	180	290
5.0Gi/DP/250/187	F5	F5	SST	44-47	71-76	190	310
5.7GS/SX/250/187	14¹/₂ x 19	37 x 48	AL	44-47	71-76	170	270
5.7GS/DP/250/187	F6	F6	SST	45-48	72-77	180	290
5.7GSi/SX/280/209	14³/₄ x 19	38 x 48	SST	47-50	76-80	180	290
5.7GSi/DP/280/209	F6	F6	SST	47-50	76-80	190	310
5.7GXi/SX/315/235	14³/₄ x 19	38 x 48	SST	49-52	79-84	170	270
5.7GXi/DP/315/235	F6	F6	SST	49-52	79-84	180	290
7.4GSi/DP/385/287	F6	F6	SST	57-60	92-97	170	270
8.1Gi/DP/375/280	F7	F7	SST	57-60	92-97	170	270

FUEL FLOW DATA - 235 SUNDOWNER WITH 5.0Gi/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	24	39	9	34
3500	30	48	10	38
4000	35	56	14	53
4500	40	64	18	68
WOT	44	71	21	80

FUEL FLOW DATA - 235 SUNDOWNER WITH 5.0Gi/DP/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	16	26	7	27
3000	25	40	9	34
3500	31	50	10	38
4000	36	58	14	53
4500	41	66	18	68
WOT	45	72	21	80

FUEL FLOW DATA - 235 SUNDOWNER WITH 5.7GS/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	26	42	10	38
3500	31	50	11	42
4000	36	58	14	53
4500	41	66	18	68
WOT	45	72	22	83



FUEL FLOW DATA - 235 SUNDOWNER WITH 5.7GS/DP/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	20	32	7	30
3000	28	45	9	34
3500	32	52	11	42
4000	37	60	14	53
4500	42	69	18	68
WOT	46	74	22	83

FUEL FLOW DATA - 235 SUNDOWNER WITH 5.7GSi/SX/280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	27	43	8	30
3500	31	50	11	42
4000	36	58	15	57
4500	42	68	19	72
WOT	48	77	23	87

FUEL FLOW DATA - 235 SUNDOWNER WITH 5.7GSi/DP/280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	20	6	23
2500	20	32	7	27
3000	29	47	9	34
3500	34	55	11	42
4000	38	61	15	57
4500	43	69	19	72
WOT	48	77	23	87

FUEL FLOW DATA - 235 SUNDOWNER WITH 5.7GXi/SX/310/231

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	27	43	9	34
3500	32	52	11	42
4000	37	60	15	57
4500	43	69	19	72
WOT	50	81	24	91



FUEL FLOW DATA - 235 SUNDOWNER WITH 5.7GX_i//DP/315/235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	28	6	23
2500	20	32	7	27
3000	29	47	9	34
3500	35	56	11	42
4000	39	63	15	57
4500	44	71	19	72
WOT	50	81	24	91

FUEL FLOW DATA - 235 SUNDOWNER WITH 7.4GS_i//DP/385/287

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	13	21	7	26
2500	25	40	9	34
3000	33	53	11	42
3500	40	64	15	57
4000	46	74	19	72
4500	53	85	26	98
WOT	58	93	30	113

FUEL FLOW DATA - 235 SUNDOWNER WITH 8.1Gi//DP/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	13	21	8	30
2500	26	42	10	38
3000	34	55	13	49
3500	42	67	17	64
4000	48	77	22	83
4500	56	90	26	98
WOT	58	93	30	113

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



235 SUNDOWNER OPTIONS

- Batteries, dual with switch
- Bow rails, raised
- Cockpit refreshment center: dual batteries, refrigerator, sink with pressurized water system (7 gal/27L), counter top, and trash receptacle (N/A w/ U-wrap interior)
- Docking lights
- Engine flush-out kit
- Graphics, sport
- Head, pump-out
- Hour meter
- Prop, stainless (exchange SX only)
- Remote oil filter (standard on 7.4 GSi and 8.1 Gi engines)
- Seat cushion, aft fill-in (with U-wrap only)
- Seating, double-wide lounger, port
- Seating, U-wrap interior
- Stereo remote with display at swim platform
- Stove, one burner, butane
- Swim platform, extended
- Table with mount
- Thru-transom exhaust, Quick & Quiet Plus
- Trim tabs, hydraulic
- Windshield wiper, starboard

Canvas Options

- Camper canvas
- Cockpit cover
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



265 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	25'8"	7.82 m
LOA w/Extended Swim Platform:	28'1"	8.56 m
Storage Length:	27'4"	8.33 m
Maximum Sleeping Depth:	102"/76"	2.59 m/1.93 m
Maximum Sleeping Width:	71"	1.80 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	65"	1.65 m
Total Height:	6'8"	2.03 m
Total Height on Trailer:	8'3"	2.52 m
Transom Angle:	15°	15°
Deadrise:	21°	21°
Bridge Clearance:	5'6"	1.68 m
Cabin Height:	4'7"	1.40 m
Cockpit Height (stern):	33"	89 cm
Cockpit Height (helm):	37"	97 cm
Freeboard (min.):	33"	84 cm
Draft (drive down):	35"	89 cm
Draft (drive up):	18"	46 cm
Fuel:	80 gal	302 l
Persons Capacity:	14	14
Maximum Capacity:	2800 lbs	1270 kg

Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.7GS/SX	250	187	4550	2060
5.7GS/DP	250	187	4570	2070
5.7GSi/DP	280	209	4580	2080
5.7GXi/DP	315	235	4580	2080
8.1Gi/DP	375	280	4800	2180
7.4GSi/DP	385	287	4780	2170
8.2GSi/DP	415	310	4780	2170
8.1GSi/DP	420	313	4800	2180

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
265S	5.7GXi/DP	3580	1000	60	390	250	1500
KG							
265S	5.7GXi/DP	1620	454	27	176	113	680



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.7GS/SX/250/187	15 x 17	38 x 43	AL	41-44	66-77	180	290
5.7GS/DP/250/187	F5	F5	SST	43-46	69-74	190	310
5.7GSi/DP/280/209	F5	F5	SST	46-49	74-79	190	310
5.7GXi/DP/315/235	F5	F5	SST	47-50	76-81	180	290
8.1Gi/DP/375/280	F6	F6	SST	52-55	84-89	180	290
7.4GSi/DP/385/287	F5	F5	SST	52-55	84-89	180	290
8.2GSi/DP/415/310	F6	F6	SST	54-57	87-92	180	290
8.1GSi/DP/420/313	F6	F6	SST	54-57	87-92	180	290

FUEL FLOW DATA - 265 SUNDOWNER WITH 5.7GS/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	18	29	8	30
3000	25	40	9	34
3500	32	52	11	42
4000	37	60	14	53
4500	40	64	18	68
WOT	42	68	22	83

FUEL FLOW DATA - 265 SUNDOWNER WITH 5.7GS/DP/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	27
2500	20	32	8	30
3000	28	45	9	34
3500	34	55	11	42
4000	39	63	14	53
4500	42	68	18	68
WOT	44	71	22	83

FUEL FLOW DATA - 265 SUNDOWNER WITH 5.7GSi/DP/280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	15	6	23
2500	21	34	8	30
3000	29	47	9	34
3500	35	56	11	41
4000	40	64	16	61
4500	44	71	20	76
WOT	47	76	23	87



FUEL FLOW DATA - 265 SUNDOWNER WITH 5.7GXi/DP/315/235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	21	34	9	34
3000	30	48	10	38
3500	35	56	12	45
4000	40	64	17	64
4500	45	72	21	79
WOT	48	77	24	91

FUEL FLOW DATA - 265 SUNDOWNER WITH 8.1Gi/DP/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	22	35	9	34
3000	34	55	12	45
3500	40	64	16	60
4000	46	74	20	76
4500	51	82	26	98
WOT	53	85	30	113

FUEL FLOW DATA - 265 SUNDOWNER WITH 7.4GSi/DP/385/287

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	7	27
2500	22	35	9	34
3000	32	52	11	42
3500	38	61	15	57
4000	43	69	19	72
4500	48	77	26	98
WOT	53	85	30	113

FUEL FLOW DATA - 265 SUNDOWNER WITH 8.2GSi/DP/415/310

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	12	19	8	30
2500	24	39	9	34
3000	31	50	12	45
3500	39	63	16	60
4000	45	72	20	76
4500	51	82	27	102
WOT	55	89	32	121



FUEL FLOW DATA - 265 SUNDOWNER WITH 8.1GSI/DP/420/313

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	22	35	9	34
3000	34	55	12	45
3500	40	64	16	60
4000	46	74	20	76
4500	52	84	27	102
WOT	55	89	32	121



265 SUNDOWNER OPTIONS

- Batteries, dual with switch
- Bow rails, raised
- Cockpit refreshment center: dual batteries, refrigerator, sink with pressurized water system (7gal/27L), counter top, and trash receptacle (N/A w/U-wrap interior)
- Docking lights
- Engine flush-out kit
- Graphics, sport
- Head, pump-out
- Hour meter
- Prop, stainless (exchange SX only)
- Remote oil filter (standard on 7.4 GSi, 8.1 Gi, 8.1 GSi and 8.2 GSi engines)

- Seat cushion, aft fill-in (with U-wrap only)
- Seating, double-wide lounger, port
- Seating, U-wrap interior
- Stereo remote with display at swim platform
- Stove, one burner, butane
- Swim platform, extended
- Table with mount
- Thru-transom exhaust, Quick & Quiet Plus
- Trim tabs, hydraulic
- Windshield wiper, starboard

Canvas Options

- Camper canvas
- Cockpit cover
- Mooring cover

Trailer Options

- Disc brakes, tandem
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



285 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	27'9"	8.46 m
LOA w/Extended Swim Platform:	30'1"	9.17 m
Maximum Sleeping Depth:	72"	1.83 m
Maximum Sleeping Width:	79"	2.01 m
Beam:	9'4"	2.85 m
Keel to W/S Shelf:	73"	1.85 m
Total Height:	7'5"	2.26 m
Total Height on Trailer:	9'3"	2.82 m
Transom Angle:	15°	15°
Deadrise:	21°	21°
Bridge Clearance:	5'6"	1.68 m
Cabin Height:	4'7"	1.40 m
Cockpit Height (stern):	33"	89 cm
Cockpit Height (helm):	37"	97 cm
Freeboard (min.):	33"	84 cm
Draft (drive down):	37"	94 cm
Draft (drive up):	20"	50 cm
Fuel:	130 gal	491 l
Potable Water	12 gal	45 l
Holding	12 gal	45 l
Persons Capacity:	15	15
Maximum Capacity:	Yacht	Yacht

Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
8.1Gi/DP	375	280	6220	2820
7.4GSi/DP	385	287	6200	2810
8.2GSi/DP	415	310	6200	2810
8.1GSi/DP	420	313	6220	2820
Twin 5.0Gi/SX	250 ea	187 ea	7100	3220
Twin 5.7GSi/SX	280 ea	209 ea	7100	3220
Twin 5.7GXi/SX	315 ea	235 ea	7100	3220

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
285S Twin	5.7GXi/SX	5120	1980	120	780	250	1690
KG							
285S Twin	5.7GXi/SX	2320	898	54	206	113	766



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
8.1Gi/DP/310/231	F5	F5	SST	47-50	76-81	200	320
7.4GSi/DP/385/287	F4	F4	SST	47-50	76-81	200	320
8.2GSi/DP/415/310	F5	F5	SST	50-53	81-85	200	320
8.1GSi/DP/420/313	F5	F5	SST	50-53	81-85	200	320
Twin 5.0Gi/SX/250/187	14³/4x 21	37 x 53	SST	55-58	89-93	180	290
Twin 5.7GSi/SX/280/209	14³/4x 21	37 x 53	SST	57-60	92-97	180	290
Twin 5.7GXi/SX/315/235	14³/4x 21	37 x 53	SST	59-82	95-100	180	290

FUEL FLOW DATA - 285 SUNDOWNER WITH 8.1Gi/DP/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	7	26
2500	17	27	9	34
3000	25	40	12	45
3500	32	52	17	64
4000	39	63	21	79
4500	46	74	25	95
WOT	48	77	30	113

FUEL FLOW DATA - 285 SUNDOWNER WITH 7.4GSi/DP/385/287

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	7	27
2500	18	29	9	34
3000	27	43	11	42
3500	34	55	15	57
4000	39	63	19	72
4500	44	71	26	98
5000	47	76	28	106
WOT	48	77	30	115

FUEL FLOW DATA - 285 SUNDOWNER WITH 8.2GSi/DP/415/310

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	19	31	9	34
3000	28	45	12	45
3500	35	56	16	60
4000	41	66	20	76
4500	46	74	27	102
WOT	51	82	32	121



FUEL FLOW DATA - 285 SUNDOWNER WITH TWIN 8.1GSi/DP/420/313

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	19	31	9	34
3000	28	45	12	45
3500	35	56	16	60
4000	41	66	20	76
4500	46	74	27	102
WOT	51	82	32	121

FUEL FLOW DATA - 285 SUNDOWNER WITH TWIN 5.0Gi/SX/250/187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	12	45
2500	18	29	14	53
3000	29	47	18	68
3500	37	60	20	76
4000	43	69	28	106
4500	50	80	36	136
WOT	56	90	42	159

FUEL FLOW DATA - 285 SUNDOWNER WITH TWIN 5.7GXi/SX/315/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	12	45
2500	18	29	14	53
3000	30	48	18	68
3500	38	61	22	83
4000	45	72	30	113
4500	52	84	40	151
WOT	59	95	48	181

FUEL FLOW DATA - 285 SUNDOWNER WITH TWIN 5.7GSi/SX/280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	12	45
2500	18	29	14	53
3000	30	48	18	68
3500	38	61	22	83
4000	45	72	30	113
4500	53	85	38	144
WOT	58	93	46	174

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



285 SUNDOWNER OPTIONS

- CD changer, 10-disc
- Docking lights
- Engine flush-out kit
- Graphics, sport
- Grey water system with holding tank
- Hour meter
- Microwave
- Seat cushion, aft fill-in
- Stereo remote with display at swim platform
- Stove, one burner, butane
- Swim platform, extended
- Table with mount
- Thru-transom exhaust, Quick & Quiet Plus
- VHF radio
- Windlass with rope, chain and anchor

Canvas Options

- Camper canvas
- Cockpit cover
- Mooring cover

Trailer Options

- Sure-Load™ custom matched, tandem axle trailer with tandem disc brakes
- Tri-axle trailer with tri-axle brakes (req. with twin engines)
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



248 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	26'2"	7.98 m
Length w/o Swim Platform	23'10"	7.27 m
Maximum Sleeping Depth (V-Berth):	84"	2.13 m
Maximum Sleeping Width (V-Berth):	78"	1.98 m
Maximum Sleeping Depth (Mid Cabin):	73"	1.85 m
Maximum Sleeping Width (Mid Cabin):	53"	1.35 m
Beam:	8'6"	2.55 m
Keel to W/S Shelf:	6'10"	2.08 m
Total Height:	8'5"	2.57 m
Total Height on Trailer:	10'0"	3.05 m
Transom Angle:	15°	15°
Deadrise:	17°	17°
Bridge Clearance:	6'9"	2.06 m
Cockpit Height (stern):	23"	58 cm
Cockpit Height (helm):	27" / 37"	69 cm / 94 cm
Headroom (max.):	5'10"	1.78 m
Freeboard (min.):	47"	1.19 m
Draft (drive down):	36"	91 cm
Draft (drive up):	19"	48 cm
Fuel:	70 gal	265 l
Potable Water:	16 gal	60 l
Holding	16 gal	60 l
Passengers:	10	10
Maximum Capacity:	2250 lbs	1020 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.0 GL/SX	220	164	5880	2670
5.0 GL/DP	220	164	5900	2680
5.0 Gi/SX	250	187	5890	2670
5.0 Gi/DP	250	187	5910	2680
5.7 GS/SX	250	187	5880	2670
5.7 GS/DP	250	187	5900	2680
5.7 GSi/DP	280	209	5910	2680
5.7 GXi/DP	315	235	5910	2680

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
248V	5.7 GS/DP	4910	990	120	420	250	1690
KG							
248V	5.7 GS/DP	2230	449	54	190	113	766



PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0GL/SX/220/164	15¹/₂ x 15	39 x 38	AL	33-36	53-58	150	242
5.0GL/DP/220/164	F3	F3	SST	36-39	58-63	160	258
5.0Gi/SX/250/187	15¹/₂ x 15	39 x 38	AL	35-38	56-61	160	258
5.0Gi/DP/250/187	F3	F3	SST	38-41	61-66	160	258
5.7GS/SX/250/187	15¹/₂ x 15	39 x 38	AL	37-40	60-64	150	242
5.7GS/DP/250/187	F4	F4	SST	40-43	64-69	160	258
5.7GSi/DP/280/209	F4	F4	SST	42-45	68-72	160	258
5.7GXi/DP/315/235	F4	F4	SST	43-46	69-74	150	242

FUEL FLOW DATA - 248 VISTA WITH 5.0GL/ SX / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	5	19
2500	8	13	6	23
3000	16	26	8	30
3500	24	39	10	38
4000	30	48	12	45
4500	34	55	17	64
WOT	35	56	19	72

FUEL FLOW DATA - 248 VISTA WITH 5.0GL/ DP / 220 / 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	6	23
3000	19	31	8	30
3500	26	42	10	38
4000	31	50	12	45
4500	36	58	17	64
WOT	38	61	19	72

FUEL FLOW DATA - 248 VISTA WITH 5.0Gi/ SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	5	19
2500	8	12	6	23
3000	16	26	8	30
3500	24	39	10	38
4000	31	50	12	45
4500	35	56	17	64
WOT	37	60	21	80



FUEL FLOW DATA - 248 VISTA WITH 5.0Gi/ DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	6	23
3000	19	31	8	30
3500	27	43	10	38
4000	32	52	12	45
4500	37	60	17	64
WOT	40	64	21	80

FUEL FLOW DATA - 248 VISTA WITH 5.7GS/ SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	5	19
2500	8	13	7	27
3000	17	27	9	34
3500	25	40	11	42
4000	32	52	13	49
4500	38	61	18	68
WOT	41	66	22	83

FUEL FLOW DATA - 248 VISTA WITH 5.7GS/ DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	7	27
3000	20	32	9	34
3500	28	45	11	42
4000	33	53	13	49
4500	39	63	18	80
WOT	42	68	22	83

FUEL FLOW DATA - 248 VISTA WITH 5.7GSi/ DP / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	7	27
3000	20	32	9	34
3500	28	45	11	42
4000	34	55	13	49
4500	40	64	18	68
WOT	43	69	23	87



FUEL FLOW DATA - 248 VISTA WITH 5.7GX/ DP / 315/ 235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	7	27
3000	20	32	9	34
3500	28	45	11	42
4000	34	55	14	53
4500	41	66	20	76
WOT	44	71	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



248 VISTA OPTIONS

- Air conditioning/heater (5,000 Btu)
- CD changer, 10-disc
- Deck sunpads
- Engine flush-out kit
- Fire extinguishing system
- Gas vapor detector
- Grey water system with holding tank
- Head, overboard discharge
- Head, Vacu-Flush
- Hour meter
- Light, spot/flood remote
- Microwave
- Navigational Package 1:
 - Raytheon VHF-210
 - Raytheon 300-GPS

- Pillow package
- Prop, stainless (SX only)
- Remote oil filter
- Seat cushion, aft fill-in
- Shower, aft
- Stereo remote with display at swim platform
- Stove, alcohol/electric
- Table, cockpit
- Tank level indicators

CANVAS OPTIONS

- Cockpit cover

TRAILER OPTIONS

- Tandem axle trailer with disc brakes, surge
- Tandem disc brakes, surge
- Galvanized trailer
- Spare tire and wheel
- Spare tire and wheel, aluminum or galvanized
- Wheel, aluminum (each)

CE Package

Export Package

International Package



268 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	28'2"	8.59 m
Length w/o Swim Platform:	25'8"	7.88 m
Maximum Sleeping Depth (V-Berth):	90"	2.29 m
Maximum Sleeping Width (V-Berth):	74"	1.88 m
Maximum Sleeping Depth (Mid Cabin):	76"	1.93 m
Maximum Sleeping Width (Mid Cabin):	60"	1.52 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	7'1"	2.16 m
Total Height:	10'6"w/arch 8'9"wo/arch	3.20/2.67 m
Total Height on Trailer:	12'6"w/arch 10'9"wo/arch	3.81/3.28 m
Transom Angle:	15°	15°
Deadrise:	17°	17°
Bridge Clearance:	8'9"w/arch 7'0"wo/arch	2.13 m
Cockpit Height (stern):	24"	61 cm
Cockpit Height (helm):	27" / 37"	69 cm / 94 cm
Headroom (max):	6'	1.83 m
Freeboard (min.):	48"	1.22 m
Draft (drive down):	39"	99 cm
Draft (drive up):	22"	56 cm
Fuel:	85 gal	321 l
Potable Water:	21 gal	79 l
Holding	21 gal	79 l
Passengers:	10	10
Maximum Capacity:	2460 lbs.	1120 kg

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.7 GS/SX	250	187	6470	2930
5.7 GS/DP	250	187	6490	2940
5.7 GSi/DP	280	209	6500	2950
5.7 GXi/DP	315	235	6500	2950
8.1 Gi/DP	375	280	6720	3050

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
268V	5.7GSi/DP	5500	1000	120	510	350	1680
KG							
268V	5.7GSi/DP	2490	454	54	231	158	762



PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.7 GS/SX/250/187	15¹/₂ x 15	39 x 38	AL	34-37	55-60	150	242
5.7 GS/DP/250/187	F4	F4	SST	37-40	60-64	160	258
5.7 GSi/DP/280/209	F4	F4	SST	39-42	63-68	170	274
5.7 GXi/DP/315/235	F4	F4	SST	40-43	64-69	160	258
8.1 Gi/DP/375/280	F4	F4	SST	43-46	69-74	160	258

FUEL FLOW DATA - 268 VISTA WITH 5.7 GS/SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	10	16	8	30
3000	24	39	10	38
3500	28	45	13	49
4000	32	52	17	64
4500	35	56	21	80
WOT	36	58	22	83

FUEL FLOW DATA - 268 VISTA WITH 5.7 GS/DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	6	23
2500	11	18	8	30
3000	25	40	10	38
3500	29	47	13	49
4000	33	53	17	64
4500	37	60	21	80
WOT	38	61	22	83

FUEL FLOW DATA - 268 VISTA WITH 5.7 GSi/DP / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	11	18	8	30
3000	24	42	11	42
3500	31	50	14	53
4000	35	58	17	64
4500	37	63	20	76
WOT	41	66	23	87



FUEL FLOW DATA - 268 VISTA WITH 5.7 GXi/DP / 315 / 235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	11	18	8	30
3000	24	42	11	42
3500	31	50	14	53
4000	35	58	17	64
4500	38	61	20	76
WOT	42	68	24	91

FUEL FLOW DATA - 268 VISTA WITH 8.1 Gi/DP / 375 / 280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	7	27
2500	13	21	10	38
3000	30	48	12	45
3500	35	56	16	53
4000	40	64	21	79
4500	44	71	26	98
WOT	45	72	30	113

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



268 VISTA OPTIONS

- Air conditioning/heater (5,000 Btu)
- CD changer, 10-disc
- Deck sunpads
- Engine flush-out kit
- Fire extinguishing system
- Gas vapor detector
- Generator 5 kw @ 110 VAC, 4 kw @ 220 VAC (includes air conditioning/heater, N/A with 5.7 GS or Grey water system)
- Grey water system with holding tank
- Head, overboard discharge
- Head, Vacu-Flush
- Hour meter
- Light, spot/flood remote
- Microwave
- Navigational Package 1: Raytheon VHF-210 Raytheon 300-GPS
- Pillow package
- Prop, stainless (SX only)
- Radar arch
- Remote oil filter (standard on 8.1 Gi engine)
- Seat cushion, aft fill-in
- Stereo remote with display at swim platform
- Stove, alcohol/electric
- Table, cockpit
- Tank level indicators
- Windlass with rope, chain and anchor
- Canvas Options
 - Cockpit cover
- Trailer Options
 - Tandem axle trailer with disc brakes, surge
 - Tandem disc brakes, surge
 - Galvanized trailer
 - Spare tire and wheel
 - Spare tire and wheel, aluminum or galvanized
 - Wheel, aluminum (each)

CE Package

Export Package

International Package



298 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	31'0"	9.45 m
Length w/o Swim Platform:	28'0"	8.54 m
Maximum Sleeping Depth (V-Berth):	80"	2.03 m
Maximum Sleeping Width (V-Berth):	80"	2.03 m
Maximum Sleeping Depth (Mid Cabin):	75"	1.91 m
Maximum Sleeping Width (Mid Cabin):	55"	1.40 m
Beam:	10'6"	3.20 m
Keel to W/S Shelf:	7'8"	2.34 m
Total Height:	11'2" w/arch	3.40 m w/arch
Transom Angle:	15°	15°
Deadrise:	19°	17°
Bridge Clearance:	9'0" w/arch	2.74 m w/arch
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	32"	81 cm
Headroom (max):	6'1"	1.86 m
Freeboard (min.):	44"	1.14 m
Draft (drive down):	39"	99 cm
Draft (drive up):	28"	56 cm
Fuel:	170 gal	643 l
Potable Water:	30 gal	113 l
Holding	30 gal	113 l
Passengers:	11	11
Maximum Capacity:	Yacht	Yacht

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
Twin KAD32/DPS	159 EA	119 EA	10100	4580
Twin 5.0Gi/SX	250 EA	187 EA	9960	4520
Twin 5.0Gi/DP	250 EA	187 EA	10000	4540
Twin 5.7GSi/DP	280 EA	209 EA	10000	4540

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
LBS						
298V	Twin 5.7GSi/DP	8000	2000	180	1020	750
KG						
298V	Twin 5.7GSi/DP	3630	907	82	463	344



PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin KAD32/DPS/159/119	F6	F6	SST	38-41	61-66	370	600
Twin 5.0Gi/SX/250/187	14³/₄ x 17	38 x 43	SST	44-47	71-76	200	320
Twin 5.0Gi/DP/250/187	F5	F5	SST	46-49	74-79	210	340
Twin 5.7GSi/DP/280/209	F6	F6	SST	49-52	79-84	210	344

FUEL FLOW DATA - 298 VISTA WITH TWIN KAD32/DPS

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	21	5	19
2500	20	32	7	26
3000	27	43	10	38
3500	34	55	14	53
WOT	39	63	18	68

FUEL FLOW DATA - 298 VISTA WITH TWIN 5.0Gi/SX / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	9	34
2500	13	21	13	49
3000	20	32	18	68
3500	27	43	23	87
4000	34	55	30	113
4500	41	66	37	140
WOT	46	74	42	159

FUEL FLOW DATA - 298 VISTA WITH TWIN 5.0Gi/DP / 250 / 187

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	14	9	34
2500	16	26	13	49
3000	24	39	18	68
3500	30	48	23	87
4000	37	60	30	113
4500	43	69	37	140
WOT	48	77	42	159

FUEL FLOW DATA - 298 VISTA W/ TWIN 5.7GSi/DP / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	10	38
2500	17	27	15	57
3000	26	42	20	76
3500	32	52	25	95
4000	40	64	32	121
4500	46	74	39	147
WOT	51	82	46	174

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



298 VISTA OPTIONS

- Air conditioning/heater (10,000 Btu)
- CD changer, 10-disc
- Deck sunpads
- Engine flush-out kit
- Fire extinguishing system
- Gas vapor detector
- Generator 5 kw @ 110VAC, 4 kw @ 220VAC
- Grey water system with holding tank
- Head, overboard discharge
- Hour meter
- Ice maker, cockpit
- Interior upgrade: Admiral's Gold Captain's Navy
- Light, spot/flood remote
- Navigational Package 1:
Raytheon VHF-210
Raytheon 300-GPS
- Port Lounge (exchange for port settee)
- Refrigerator, cockpit
- Stereo remote with display at swim platform
- Stove, alcohol/electric
- TV/VCR with antenna
- Two-tone gel-coat
- Windlass with rope, chain and anchor

CANVAS OPTIONS

- Cockpit cover

CE Package

Export Package

International Package



328 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	35'1"	10.7 m
Length w/o Swim Platform:	32'11"	10.0 m
Maximum Sleeping Depth (V-Berth):	76"	1.93 m
Maximum Sleeping Width (V-Berth):	94"	2.39 m
Maximum Sleeping Depth (Mid Cabin):	77"	1.96 m
Maximum Sleeping Width (Mid Cabin):	66"	1.68 m
Beam:	11'9"	3.58 m
Keel to W/S Shelf:	7'9"	2.36 m
Total Height:	11'4" w/arch	3.46 m w/arch
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	9'2" w/arch	2.80 m w/arch
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	26"/37"	66/94 cm
Headroom (max):	6'2"	1.88 m
Freeboard (min.):	45"	1.14 m
Draft (drive down):	39"	99 cm
Draft (drive up):	28"	71 cm
Fuel:	220 gal	832 l
Potable Water:	44 gal	166 l
Holding	30 gal	113 l
Passengers:	12	12
Maximum Capacity:	Yacht	Yacht

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
Twin KAD32/DPS	159 EA	119 EA	12400	5620
Twin 5.7GSi/DP	280 EA	209 EA	12300	5580
Twin 5.7GX/DP	315 EA	235 EA	12300	5580

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
LBS						
278V	Twin 5.7GSi/DP	10300	2000	180	1320	1000
KG						
278V	Twin 5.7GSi/DP	4670	907	82	599	454



PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin KAD32/DP/159/119	F5	F5	SST	34-37	55-60	510	820
Twin 5.7GSi/DP/280/209	F5	F5	SST	44-47	71-76	280	450
Twin 5.7GXi/DP/315/235	F5	F5	SST	45-48	72-77	280	450

FUEL FLOW DATA - 328 VISTA W/ TWIN KAD32/DPS / 159 / 119

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	21	5	19
2500	19	31	7	26
3000	26	42	10	38
3500	32	52	14	53
WOT	35	56	18	68

FUEL FLOW DATA - 328 VISTA W/ TWIN 5.7GSi/SX / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	10	38
2500	17	27	15	57
3000	26	42	20	76
3500	32	52	25	95
4000	37	60	32	121
4500	42	68	39	147
WOT	45	72	46	174

FUEL FLOW DATA - 328 VISTA W/ TWIN 5.7GXi/DP / 315 / 235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	10	38
2500	17	17	15	57
3000	26	42	20	76
3500	32	52	25	95
4000	37	60	33	125
4500	42	68	40	151
WOT	46	74	48	181

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



328 VISTA OPTIONS

- Air conditioning/heater (12,000 Btu)
- CD changer, 10-disc
- Deck sunpads
- Engine flush-out
- European aft cabin bulkhead
- Fire extinguishing system
- Gas vapor detector
- Generator
5 kw @ 110VAC,
4 kw @ 220VAC
- Grey water (30 gallon) with indicator
- Head, additional holding tank (30 gallon)
- Head, overboard discharge
- Hour meters
- Interior upgrade:
Admiral's Gold
Captain's Navy
- Navigational Package 1:
Raytheon VHF-210
Raytheon 300-GPS
- Navigational Package 2:
Raytheon VHF-210
Raytheon ST60
Depth Finder
Raytheon RL72RC
with mapping
VDO Ambient Air
Temperature Gauge
- Refrigerator, cockpit (exchange for icemaker)
- Stereo remote with display at swim platform
- Stove, alcohol/electric
- Two-tone gel-coat

CE Package

Export Package

International Package



338 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	35'7"	10.7 m
Length w/o Swim Platform:	33'5"	10.0 m
Maximum Sleeping Depth (V-Berth):	76"	1.93 m
Maximum Sleeping Width (V-Berth):	94"	2.39 m
Maximum Sleeping Depth (Mid Cabin):	77"	1.96 m
Maximum Sleeping Width (Mid Cabin):	66"	1.68 m
Beam:	11'9"	3.58 m
Keel to W/S Shelf:	7'9"	2.36 m
Total Height:	11'4" w/arch	3.46 m w/arch
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	9'2" w/arch	2.80 m w/arch
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	26"/37"	66/94 cm
Headroom (max):	6'2"	1.88 m
Freeboard (min.):	45"	1.14 m
Draft (drive down):	39"	99 cm
Draft (drive up):	28"	71 cm
Fuel:	220 gal	832 l
Potable Water:	44 gal	166 l
Holding	30 gal	113 l
Passengers:	12	12
Maximum Capacity:	Yacht	Yacht

*Dimensional diagram is located on page 163.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
Twin 5.7GSi	280 EA	209 EA	13000	5900
Twin 7.4 Gi	310 EA	231 EA	13400	6080
Twin 5.7 GXi	315 EA	235 EA	13000	5900

RECOMMENDED /ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
LBS						
338V	Twin 5.7GXi	10300	2000	180	1320	1000
KG						
338V	Twin 5.7GXi	4670	907	82	599	454



PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin 5.7GSi/280/209	18x24	46x61	Nibral	34-37	55-60	190	310
Twin 7.4Gi/DP/310/231	18x22	46x56	Nibral	35-38	56-61	190	310
Twin 5.7GXi/315/235	18x25	46x64	Nibral	36-39	58-63	190	310

FUEL FLOW DATA - 338 VISTA W/ TWIN 5.7GSi / 280 / 209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	10	38
2500	15	24	17	64
3000	20	32	20	76
3500	26	42	25	95
4000	30	48	32	121
4500	34	55	39	147
WOT	35	56	46	174

FUEL FLOW DATA - 338 VISTA W/ TWIN 7.4Gi/ 310 / 231

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	10	38
2500	16	26	18	68
3000	23	37	25	95
3500	29	47	38	113
4000	34	55	38	144
WOT	36	58	48	181

FUEL FLOW DATA - 338 VISTA W/ TWIN 5.7GXi/ 315 / 235

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	10	38
2500	16	26	18	68
3000	23	37	25	95
3500	29	47	30	113
4000	33	53	36	136
4500	35	56	42	159
WOT	37	60	48	181

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



338 VISTA OPTIONS

- Air conditioning/heater (12,000 Btu)
- CD changer, 10-disc
- Deck sunpads
- European aft cabin bulkhead
- Fire extinguishing system
- Fresh water cooling
- Gas vapor detector
- Generator 5 kw @ 110VAC, 4 kw @ 220VAC
- Grey water (30 gallon) with indicator
- Head, additional holding tank (30 gallon)
- Head, overboard discharge
- Hour meters
- Interior upgrade: Admiral's Gold Captain's Navy
- Navigational Package 1: Raytheon VHF-210 Raytheon 300-GPS
- Navigational Package 2: Raytheon VHF-210 Raytheon ST60 Depth Finder Raytheon RL72RC with Mapping VDO Ambient Air Temperature Gauge
- Refrigerator, cockpit (exchange for icemaker)
- Spare shaft
- Stereo remote with display at swim platform
- Stove, alcohol/electric
- Two-tone gel-coat

CE Package

Export Package

International Package



170 LE HORIZON TRAILER SPECIFICATIONS

	HORIZON (Model# D0170)	
	US	METRIC
Length with Tongue	19'8"	5.99 m
Length with Tongue Folded	16'3"	4.95 m
Width	98"	2.49 m
Empty Weight	640 lbs	290 kg
Carrying Capacity	2,860 lbs	130 kg
GVWR (Gross Vehicle Weight Rating)	3,500 lbs	1,590 kg
GAWR (Gross Axle Wt. Rating)	3,500 lbs	1,590 kg
Height (Top of Windshield, with Boat on Trailer)	6'1"	1.85 m
Tire Size	ST 205/75R14	ST 205/75R14
Load Range	C	C
Axle	Single	Single
Wheel Type	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Jack Capacity	750 lbs	338 kg
Winch	1,400 lbs	630 kg
Ball Size	2"	5 cm



170 LE HORIZON TRAILER SPECIFICATIONS

	HORIZON (Model# D0170)	
	US	METRIC
Length with Tongue	19'8"	5.99 m
Length with Tongue Folded	16'3"	4.95 m
Width	98"	2.49 m
Empty Weight	640 lbs	290 kg
Carrying Capacity	2,860 lbs	130 kg
GVWR (Gross Vehicle Weight Rating)	3,500 lbs	1,590 kg
GAWR (Gross Axle Wt. Rating)	3,500 lbs	1,590 kg
Height (Top of Windshield, with Boat on Trailer)	6'1"	1.85 m
Tire Size	ST 205/75R14	ST 205/75R14
Load Range	C	C
Axle	Single	Single
Wheel Type	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Jack Capacity	750 lbs	338 kg
Winch	1,400 lbs	630 kg
Ball Size	2"	5 cm



180 LE/180 HORIZON TRAILER SPECIFICATIONS

180 LE/180 (S) HORIZON (Model#D018190)

	US	METRIC
Length with Tongue	20'6"	6.25 m
Length with Tongue Folded	17'1"	5.21 m
Width	98"	2.49 m
Empty Weight	780 lbs	354 kg
Carrying Capacity	4,388 lbs	1,990 kg
GVWR (Gross Vehicle Weight Rating)	5,200 lbs	2,358 kg
GAWR (Gross Axle Wt. Rating)	5,200 lbs	2,358 kg
Height (Top of Windshield, with Boat on Trailer)	6'7"	2.01 m
Tire Size	ST 225/75R15	ST 225/75R15
Load Range	D	D
Axle	Single	Single
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	340 kg
Winch	1,400 lbs	635 kg
Ball Size	2"	5 cm

180 (T) HORIZON (Model#D0190T)

	US	METRIC
Length with Tongue	20'6"	6.25 m
Length with Tongue Folded	17'1"	5.21 m
Width	98"	2.49 m
Empty Weight	880 lbs	399 kg
Carrying Capacity	5,080 lbs	2,304 kg
GVWR (Gross Vehicle Weight Rating)	6,000 lbs	2,721 kg
GAWR (Gross Axle Wt. Rating)	3,000 lbs	1,360 kg
Height (Top of Windshield, with Boat on Trailer)	6'4 1/2"	1.94 m
Tire Size	ST 205/75R14	ST 205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	340 kg
Winch	1,400 lbs	635 kg
Ball Size	2"	5 cm



180 LE/180 HORIZON TRAILER SPECIFICATIONS

180 LE/180 (S) HORIZON (Model#D018190)

	US	METRIC
Length with Tongue	20'6"	6.25 m
Length with Tongue Folded	17'1"	5.21 m
Width	98"	2.49 m
Empty Weight	780 lbs	354 kg
Carrying Capacity	4,388 lbs	1,990 kg
GVWR (Gross Vehicle Weight Rating)	5,200 lbs	2,358 kg
GAWR (Gross Axle Wt. Rating)	5,200 lbs	2,358 kg
Height (Top of Windshield, with Boat on Trailer)	6'7"	2.01 m
Tire Size	ST 225/75R15	ST 225/75R15
Load Range	D	D
Axle	Single	Single
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	340 kg
Winch	1,400 lbs	635 kg
Ball Size	2"	5 cm

180 (T) HORIZON (Model#D0190T)

	US	METRIC
Length with Tongue	20'6"	6.25 m
Length with Tongue Folded	17'1"	5.21 m
Width	98"	2.49 m
Empty Weight	880 lbs	399 kg
Carrying Capacity	5,080 lbs	2,304 kg
GVWR (Gross Vehicle Weight Rating)	6,000 lbs	2,721 kg
GAWR (Gross Axle Wt. Rating)	3,000 lbs	1,360 kg
Height (Top of Windshield, with Boat on Trailer)	6'4 1/2"	1.94 m
Tire Size	ST 205/75R14	ST 205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	340 kg
Winch	1,400 lbs	635 kg
Ball Size	2"	5 cm



190/200 HORIZON TRAILER SPECIFICATIONS

	190 (S) HORIZON (Model #D0190S01) 200 (S) HORIZON (Model #D0200S01)	
	US	METRIC
Length with Tongue	21'1"	6.43 m
Length with Tongue Folded	18'6"	5.64 m
Width	102"	2.59 m
Empty Weight	780 lbs	354 kg
Carrying Capacity	4,200 lbs	1,905 kg
GVWR (Gross Vehicle Weight Rating)	5,000 lbs	2,268 kg
GAWR (Gross Axle Wt. Rating)	5,000 lbs	2,268 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	6'7"/7'0"	2.01 m/2.13 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Single	Single
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	340 kg
Winch	1,400 lbs	635 kg
Ball Size	2"	5 cm

	190 (T) HORIZON (MODEL #D0190T01) 200 (T) HORIZON (Model #D0200T01)	
	US	METRIC
Length with Tongue	21'1"	6.43 m
Length with Tongue Folded	18'6"	5.64 m
Width	102"	2.59 m
Empty Weight	900 lbs	408 kg
Carrying Capacity	5,000 lbs	2,268 kg
GVWR (Gross Vehicle Weight Rating)	6,000 lbs	2,721 kg
GAWR (Gross Axle Wt. Rating)	3,000 lbs	1,360 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	6'7"/7'0"	2.01 m/2.13m
Tire Size	ST205/75R14	ST205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	340kg
Winch	1,400 lbs	635 kg
Ball Size	2"	5 cm



190/200 HORIZON TRAILER SPECIFICATIONS

	190 (S) HORIZON (Model #D0190S01) 200 (S) HORIZON (Model #D0200S01)	
	US	METRIC
Length with Tongue	21'1"	6.43 m
Length with Tongue Folded	18'6"	5.64 m
Width	102"	2.59 m
Empty Weight	780 lbs	354 kg
Carrying Capacity	4,200 lbs	1,905 kg
GVWR (Gross Vehicle Weight Rating)	5,000 lbs	2,268 kg
GAWR (Gross Axle Wt. Rating)	5,000 lbs	2,268 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	6'7"/7'0"	2.01 m/2.13 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Single	Single
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	340 kg
Winch	1,400 lbs	635 kg
Ball Size	2"	5 cm

	190 (T) HORIZON (MODEL #D0190T01) 200 (T) HORIZON (Model #D0200T01)	
	US	METRIC
Length with Tongue	21'1"	6.43 m
Length with Tongue Folded	18'6"	5.64 m
Width	102"	2.59 m
Empty Weight	900 lbs	408 kg
Carrying Capacity	5,000 lbs	2,268 kg
GVWR (Gross Vehicle Weight Rating)	6,000 lbs	2,721 kg
GAWR (Gross Axle Wt. Rating)	3,000 lbs	1,360 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	6'7"/7'0"	2.01 m/2.13m
Tire Size	ST205/75R14	ST205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	340kg
Winch	1,400 lbs	635 kg
Ball Size	2"	5 cm



210 HORIZON/215 SUNDOWNER TRAILER SPECIFICATIONS

	210/215 (Model #D0210215)	
	US	METRIC
Length with Tongue	22'6½"	6.87 m
Length with Tongue Folded	19'8"	5.99 m
Width	102"	2.59 m
Empty Weight	1,074 lbs	487 kg
Carrying Capacity	4,926 lbs	2,234 kg
GVWR (Gross Vehicle Weight Rating)	6,000 lbs	2,720 kg
GAWR (Gross Axle Wt. Rating)	3,000 lbs	1,360 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	7'6"/7'9"	2.29 m/2.36 m
Tire Size	ST205/75R14	ST205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Axle Rating	3,500 lbs	1,590 kg
Winch	1,900 lbs	862 kg
Hub	5 Lug 5½ Bolt Pattern	5 Lug 14 cm Bolt Pattern
Jack Capacity	750 lbs	340 kg
Ball Size	2"	5 cm



210 HORIZON/215 SUNDOWNER TRAILER SPECIFICATIONS

	210/215 (Model #D0210215)	
	US	METRIC
Length with Tongue	22'6½"	6.87 m
Length with Tongue Folded	19'8"	5.99 m
Width	102"	2.59 m
Empty Weight	1,074 lbs	487 kg
Carrying Capacity	4,926 lbs	2,234 kg
GVWR (Gross Vehicle Weight Rating)	6,000 lbs	2,720 kg
GAWR (Gross Axle Wt. Rating)	3,000 lbs	1,360 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	7'6"/7'9"	2.29 m/2.36 m
Tire Size	ST205/75R14	ST205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Axle Rating	3,500 lbs	1,590 kg
Winch	1,900 lbs	862 kg
Hub	5 Lug 5½ Bolt Pattern	5 Lug 14 cm Bolt Pattern
Jack Capacity	750 lbs	340 kg
Ball Size	2"	5 cm



230 HORIZON/235 SUNDOWNER TRAILER SPECIFICATIONS

	230/235 (Model #D0230235)	
	US	METRIC
Length with Tongue	24'6"	7.47 m
Length with Tongue Folded	21'	6.40 m
Width	102"	2.55 m
Empty Weight	1,260 lbs	571 kg
Carrying Capacity	6,240 lbs	2,830 kg
GVWR (Gross Vehicle Weight Rating)	7,500 lbs	3,400 kg
GAWR (Gross Axle Wt. Rating)	3,750 lbs	1,700 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	7'9"/7'11"	2.36 m/2.41 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Axle Rating	5,200 lbs	2,360 kg
Winch	2,300 lbs	1,040 kg
Jack Capacity	750 lbs	338 kg
Winch	2,300 lbs	1,040 kg
Wheel	6 Lug 6" Bolt Pattern	6 Lug 15 cm Bolt Pattern
Jack Capacity	850 lbs	385 kg
Ball Size	2⁵/₁₆"	6 cm



230 HORIZON/235 SUNDOWNER TRAILER SPECIFICATIONS

	230/235 (Model #D0230235)	
	US	METRIC
Length with Tongue	24'6"	7.47 m
Length with Tongue Folded	21'	6.40 m
Width	102"	2.55 m
Empty Weight	1,260 lbs	571 kg
Carrying Capacity	6,240 lbs	2,830 kg
GVWR (Gross Vehicle Weight Rating)	7,500 lbs	3,400 kg
GAWR (Gross Axle Wt. Rating)	3,750 lbs	1,700 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	7'9"/7'11"	2.36 m/2.41 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Axle Rating	5,200 lbs	2,360 kg
Winch	2,300 lbs	1,040 kg
Jack Capacity	750 lbs	338 kg
Winch	2,300 lbs	1,040 kg
Wheel	6 Lug 6" Bolt Pattern	6 Lug 15 cm Bolt Pattern
Jack Capacity	850 lbs	385 kg
Ball Size	2⁵/₁₆"	6 cm



260 HORIZON/265 SUNDOWNER TRAILER SPECIFICATIONS

	260/265 (Model #260265)	
	US	METRIC
Length with Tongue	26'7"	8.10 m
Length with Tongue Folded	23'9"	7.24 m
Width	102"	2.55 m
Empty Weight	1,500 lbs	680 kg
Carrying Capacity	8,400 lbs	3,810 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,540 kg
GAWR (Gross Axle Wt. Rating)	5,000 lbs	2,270 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	8'3¹/₂"/8'3"	2.53 m/2.52 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Axle Rating	5,200 lbs	2,360 kg
Winch	2,800 lbs	1,270 kg
Wheel	6 Lug 6" Bolt Pattern	6 Lug 15 cm Bolt Pattern
Jack Capacity	1,200 lbs	544 kg
Ball Size	2⁵/₁₆"	6 cm



260 HORIZON/265 SUNDOWNER TRAILER SPECIFICATIONS

	260/265 (Model #260265)	
	US	METRIC
Length with Tongue	26'7"	8.10 m
Length with Tongue Folded	23'9"	7.24 m
Width	102"	2.55 m
Empty Weight	1,500 lbs	680 kg
Carrying Capacity	8,400 lbs	3,810 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,540 kg
GAWR (Gross Axle Wt. Rating)	5,000 lbs	2,270 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	8'3¹/₂"/8'3"	2.53 m/2.52 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Axle Rating	5,200 lbs	2,360 kg
Winch	2,800 lbs	1,270 kg
Wheel	6 Lug 6" Bolt Pattern	6 Lug 15 cm Bolt Pattern
Jack Capacity	1,200 lbs	544 kg
Ball Size	2⁵/₁₆"	6 cm



280 HORIZON/285 SUNDOWNER TRAILER SPECIFICATIONS

	280/285 (Model #D0280SE)	
	US	METRIC
Length with Tongue	29'6"	8.99 m
Length with Tongue Folded	26'11"	8.20 m
Width	102"	2.55 m
Empty Weight	1,690 lbs	766 kg
Carrying Capacity	8,310 lbs	3,770 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,540 kg
GAWR (Gross Axle Wt. Rating)	5,000 lbs	2,270 kg
Height (Top of Windshield, with Boat on Trailer)	9'0"/9'3"	2.74 m/2.82 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Axle Rating	5,200 lbs ea	2,360 kg
Winch	2,800 lbs	1,270 kg
Wheel Type	6 Lug 6" Bolt Pattern	6 Lug 15 cm Bolt Pattern
Jack Capacity	1200 lbs	544 kg
Ball Size	2 5/16"	6 cm

	280/285 TWIN ENGINE (Model #D028STE)	
	US	METRIC
Length with Tongue	28'10"	8.79 m
Length with Tongue Folded	26'11"	8.20 m
Width	102"	2.55 m
Empty Weight	1,960 lbs	889 kg
Carrying Capacity	13,640 lbs	6,190 kg
GVWR (Gross Vehicle Weight Rating)	15,600 lbs	7,070 kg
GAWR (Gross Axle Wt. Rating)	5,200 lbs	2,360 kg
Height (Top of Windshield, with Boat on Trailer)	9'0"/9'3"	2.74 m/2.82 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tri-axle	Tri-axle
Axle Rating	5,200 lbs	2,360 kg
Winch	2,800 lbs	1,270 kg
Wheel Type	6 Lug 6" Bolt Pattern	6 Lug 15 cm Bolt Pattern
Jack Capacity	1200 lbs	544 kg
Ball Size	2 5/16"	6 cm



280 HORIZON/285 SUNDOWNER TRAILER SPECIFICATIONS

	280/285 (Model #D0280SE)	
	US	METRIC
Length with Tongue	29'6"	8.99 m
Length with Tongue Folded	26'11"	8.20 m
Width	102"	2.55 m
Empty Weight	1,690 lbs	766 kg
Carrying Capacity	8,310 lbs	3,770 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,540 kg
GAWR (Gross Axle Wt. Rating)	5,000 lbs	2,270 kg
Height (Top of Windshield, with Boat on Trailer)	9'0"/9'3"	2.74 m/2.82 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Axle Rating	5,200 lbs ea	2,360 kg
Winch	2,800 lbs	1,270 kg
Wheel Type	6 Lug 6" Bolt Pattern	6 Lug 15 cm Bolt Pattern
Jack Capacity	1200 lbs	544 kg
Ball Size	2 5/16"	6 cm

	280/285 TWIN ENGINE (Model #D028STE)	
	US	METRIC
Length with Tongue	28'10"	8.79 m
Length with Tongue Folded	26'11"	8.20 m
Width	102"	2.55 m
Empty Weight	1,960 lbs	889 kg
Carrying Capacity	13,640 lbs	6,190 kg
GVWR (Gross Vehicle Weight Rating)	15,600 lbs	7,070 kg
GAWR (Gross Axle Wt. Rating)	5,200 lbs	2,360 kg
Height (Top of Windshield, with Boat on Trailer)	9'0"/9'3"	2.74 m/2.82 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tri-axle	Tri-axle
Axle Rating	5,200 lbs	2,360 kg
Winch	2,800 lbs	1,270 kg
Wheel Type	6 Lug 6" Bolt Pattern	6 Lug 15 cm Bolt Pattern
Jack Capacity	1200 lbs	544 kg
Ball Size	2 5/16"	6 cm



214 FUNSHIP TRAILER SPECIFICATIONS

	214 Funship (Model #D0214)	
	US	METRIC
Length with Tongue	24'	7.32 m
Length with Tongue Folded	21'3"	6.48 m
Width	102"	2.55 m
Empty Weight	1,160 lbs	526 kg
Carrying Capacity	4,840 lbs	2,178 kg
GVWR (Gross Vehicle Weight Rating)	6,000 lbs	2,700 kg
GAWR (Gross Axle Wt. Rating)	3,000 lbs	1,350 kg
Height (Top of Windshield, with Boat on Trailer)	7'4"	2.24 m
Tire Size	ST205/75R14	ST205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	1,900 lbs	862 kg
Ball Size	2"	5 cm



214 FUNSHIP TRAILER SPECIFICATIONS

	214 Funship (Model #D0214)	
	US	METRIC
Length with Tongue	24'	7.32 m
Length with Tongue Folded	21'3"	6.48 m
Width	102"	2.55 m
Empty Weight	1,160 lbs	526 kg
Carrying Capacity	4,840 lbs	2,178 kg
GVWR (Gross Vehicle Weight Rating)	6,000 lbs	2,700 kg
GAWR (Gross Axle Wt. Rating)	3,000 lbs	1,350 kg
Height (Top of Windshield, with Boat on Trailer)	7'4"	2.24 m
Tire Size	ST205/75R14	ST205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	1,900 lbs	862 kg
Ball Size	2"	5 cm



234 FUNSHIP TRAILER SPECIFICATIONS

	234 Funship (Model #D0234)	
	US	METRIC
Length with Tongue	25'6"	7.77 m
Length with Tongue Folded	22'1"	6.73 m
Width	102"	2.55 m
Empty Weight	1,280 lbs	581 kg
Carrying Capacity	5,720 lbs	2,590 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,170 kg
GAWR (Gross Axle Wt. Rating)	3,500 lbs	1,590 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	7'5"	2.26 m
Tire Size	ST205/75R14	ST205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	2,300 lbs	1,040 kg
Ball Size	2 5/16"	6 cm



234 FUNSHIP TRAILER SPECIFICATIONS

	234 Funship (Model #D0234)	
	US	METRIC
Length with Tongue	25'6"	7.77 m
Length with Tongue Folded	22'1"	6.73 m
Width	102"	2.55 m
Empty Weight	1,280 lbs	581 kg
Carrying Capacity	5,720 lbs	2,590 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,170 kg
GAWR (Gross Axle Wt. Rating)	3,500 lbs	1,590 kg
Height (Top of Windshield, with Boat on Trailer) (Horizon/Sundowner)	7'5"	2.26 m
Tire Size	ST205/75R14	ST205/75R14
Load Range	C	C
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	2,300 lbs	1,040 kg
Ball Size	2 5/16"	6 cm



254 FUNSHIP TRAILER SPECIFICATIONS

	254 (Model # D0254)	
	US	METRIC
Length with Tongue	30'5"	9.27 m
Length with Tongue Folded	26'6"	8.08 m
Width	102"	2.55 m
Empty Weight	1,650 lbs	749 kg
Carrying Capacity	8,340 lbs	3,780 kg
GVWR (Gross Vehicle Weight Rating)	9,990 lbs	4,530 kg
GAWR (Gross Axle Wt. Rating)	4,995 lbs	2,270 kg
Height (Top of Windshield, with Boat on Trailer)	7'11¹/₂"	2.43 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Hub	6 Lug 5¹/₂" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	2,800 lbs	1,270 kg
Ball Size	2⁵/₁₆"	6 cm



254 FUNSHIP TRAILER SPECIFICATIONS

	254 (Model # D0254)	
	US	METRIC
Length with Tongue	30'5"	9.27 m
Length with Tongue Folded	26'6"	8.08 m
Width	102"	2.55 m
Empty Weight	1,650 lbs	749 kg
Carrying Capacity	8,340 lbs	3,780 kg
GVWR (Gross Vehicle Weight Rating)	9,990 lbs	4,530 kg
GAWR (Gross Axle Wt. Rating)	4,995 lbs	2,270 kg
Height (Top of Windshield, with Boat on Trailer)	7'11½"	2.43 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	2,800 lbs	1,270 kg
Ball Size	2⅝"	6 cm



248 VISTA TRAILER SPECIFICATIONS

248 VISTA (Model # D0248)

	US	METRIC
Length with Tongue	26'	7.93 m
Length with Tongue Folded	22'1"	6.73 m
Width	102"	2.58 m
Empty Weight	1,690 lbs	766 kg
Carrying Capacity	7,040 lbs	3,190 kg
GVWR (Gross Vehicle Weight Rating)	8,730 lbs	3,960 kg
GAWR (Gross Axle Wt. Rating)	4,365 lbs	1,980 kg
Height (Top of Windshield, with Boat on Trailer)	120"	3.05 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Hub	6 Lug 5 $\frac{1}{2}$ " Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	2,600 lbs	1170 kg
Ball Size	2 $\frac{5}{16}$ "	6 cm



248 VISTA TRAILER SPECIFICATIONS

248 VISTA (Model # D0248)

	US	METRIC
Length with Tongue	26'	7.93 m
Length with Tongue Folded	22'1"	6.73 m
Width	102"	2.58 m
Empty Weight	1,690 lbs	766 kg
Carrying Capacity	7,040 lbs	3,190 kg
GVWR (Gross Vehicle Weight Rating)	8,730 lbs	3,960 kg
GAWR (Gross Axle Wt. Rating)	4,365 lbs	1,980 kg
Height (Top of Windshield, with Boat on Trailer)	120"	3.05 m
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Hub	6 Lug 5 $\frac{1}{2}$ " Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	2,600 lbs	1170 kg
Ball Size	2 $\frac{5}{16}$ "	6 cm



268 VISTA TRAILER SPECIFICATIONS

	268 VISTA (Model # D0268)	
	US	METRIC
Length with Tongue	27'11"	8.51 m
Length with Tongue Folded	24'1"	7.34 m
Width	102"	2.55 m
Empty Weight	1,680 lbs	763 kg
Carrying Capacity	8,318 lbs	3,770 kg
GVWR (Gross Vehicle Weight Rating)	9,998 lbs	4,530 kg
GAWR (Gross Axle Wt. Rating)	4,999 lbs	2,270 kg
Height (Top of Windshield, with Boat on Trailer)	128" 150" w/Radar Arch	3.24 m 381 cm w/Radar Arch
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	2800 lbs	1,270 kg
Ball Size	2 5/16"	6 cm



268 VISTA TRAILER SPECIFICATIONS

	268 VISTA (Model # D0268)	
	US	METRIC
Length with Tongue	27'11"	8.51 m
Length with Tongue Folded	24'1"	7.34 m
Width	102"	2.55 m
Empty Weight	1,680 lbs	763 kg
Carrying Capacity	8,318 lbs	3,770 kg
GVWR (Gross Vehicle Weight Rating)	9,998 lbs	4,530 kg
GAWR (Gross Axle Wt. Rating)	4,999 lbs	2,270 kg
Height (Top of Windshield, with Boat on Trailer)	128" 150" w/Radar Arch	3.24 m 381 cm w/Radar Arch
Tire Size	ST225/75R15	ST225/75R15
Load Range	D	D
Axle	Tandem	Tandem
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	2800 lbs	1,270 kg
Ball Size	2 5/16"	6 cm



STERN DRIVE SPECIFICATIONS

ENGINE

KAD 32/DPS

	US	METRIC
Power (propshaft)	159hp	119 kw
Displacement	146 cu. in.	2.4 L
Cylinders	4	4
Bore / Stroke	3.62" x 3.54"	92 mm x 90 mm
Compression Ratio	17.5:1	17.5:1
Main Bearings	5	5
Fuel System	Bosch Direct Fuel Injection	Bosch Direct Fuel Injection
Full Throttle Operating Range	3700-3900 rpm	3700-3900 rpm

DRIVE UNIT

Model	Duoprop	Duoprop
Gear Ratio	1.95:1	1.95:1
Gear Ratio, High Altitude	NA	/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37⁵/₈"	96 cm
*Height - Above Crankshaft Centerline	19⁵/₈"	50 cm
Total Weight Duoprop	1047 lbs	475 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Owner Protection	STD	STD
Clutch Controlled Supercharger	STD	STD
Fresh Water Cooled Turbocharger	STD	STD
After Cooler	STD	STD

*Add 13³/₁₆" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

4.3GL/SX

	US	METRIC
Power (propshaft)	190 hp	142 kw
Displacement	262 cu. in.	4.3 L
Cylinders	6	6
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	4	4
Fuel System	2-Venturi, adj. low spd/fxd high spd jets	2-Venturi, adj. low spd/fxd high spd jets
Choke	Automatic	Automatic
Full Throttle Operating Range	4200-4600 rpm	4200-4600 rpm

DRIVE UNIT

Model	SX	SX
Gear Ratio	1.79:1	1.79:1
Gear Ratio, High Altitude	1.89:1	1.89:1
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	32¹/₄"	82 cm
*Height - Above Crankshaft Centerline	20¹/₄"	51 cm
Total Weight	880 lbs	399 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	OPT	OPT
Engine Oil Cooler	NA	NA
Volvo Penta 2-Year Owner Protection	STD	STD

*Add 133³/₁₆" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

5.0GL/SX / 5.0GL/DP

	US	METRIC
Power (propshaft)	220 hp	164 kw
Displacement	305 cu. in.	5.0L
Cylinders	8	8
Bore / Stroke	3.74" x 3.48"	95 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	2-Venturi, adj. low spd/fxd high spd jets	2-Venturi, adj. low spd/fxd high spd jets
Choke	Automatic	Automatic
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm

DRIVE UNIT

Model	SX/ Duoprop	SX/ Duoprop
Gear Ratio	1.60:1/1.95:1	1.60:1/1.95:1
Gear Ratio, High Altitude	1.66:1/NA	1.66:1/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	36 ³ / ₄ "	93 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX/ Duoprop)	979 lbs/990 lbs	444 kg/449 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX/ Duoprop)	STD/NA	STD/NA
Contra Rotation (SX/ Duoprop)	NA/STD	NA/STD
Remote Oil Filter	OPT	OPT
Engine Oil Cooler	NA	NA
Volvo Penta 2-Year Owner Protection	STD	STD

*Add 13³/₁₆" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

5.0Gi/SX / 5.0Gi/DP

	US	METRIC
Power (propshaft)	250 hp	187 kw
Displacement	305 cu. in.	5.0 L
Cylinders	8	8
Bore / Stroke	3.74" x 3.48"	95 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Throttle body fuel injection	Throttle body fuel injection
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	SX/ Duoprop	SX/ Duoprop
Gear Ratio	1.60:1/1.95:1	1.60:1/1.95:1
Gear Ratio, High Altitude	1.66:1/NA	1.66:1/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX/ Duoprop)	991 lbs/1000 lbs	449 kg/454 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX/ Duoprop)	STD/NA	STD/NA
Contra Rotation (SX/ Duoprop)	NA/STD	NA/STD
Remote Oil Filter	OPT	OPT
Engine Oil Cooler	NA	NA
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD

*Add 13³/₁₆" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

5.7GS/SX / 5.7GS/DP

	US	METRIC
Power (propshaft)	250 hp	187 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	2 - Ventura Adj low spd/ fixed high spd jets	2 - Ventura Adj low spd/ fixed high spd jets
Choke	Automatic	Automatic
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm

DRIVE UNIT

Model	SX / Duoprop	SX / Duoprop
Gear Ratio	1.51:1/1.95:1	1.51:1/1.95:1
Gear Ratio, High Altitude	1.60:1/NA	1.60:1/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	36³/₄"	93 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX / Duoprop)	979 lbs/990 lbs	444 kg/449 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX/Cobra / Duoprop)	STD/NA	STD/NA
Contra Rotation (SX/Cobra / Duoprop)	NA/STD	NA/STD
Remote Oil Filter	OPT	OPT
Engine Oil Cooler	NA	NA
Volvo Penta 2-Year Owner Protection	STD	STD

*Add 13³/₁₆" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

5.7GSI/SX / 5.7GSI/DP

	US	METRIC
Power (propshaft)	280 hp	209 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Throttle body fuel injection	Throttle body fuel injection
Choke	Automatic	Automatic
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	SX / Duoprop	SX / Duoprop
Gear Ratio	1.51:1/1.95:1	1.51:1/1.95:1
Gear Ratio, High Altitude	1.60:1/NA	1.60:1/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft	22"	56 cm
Centerline		
Total Weight (SX / Duoprop)	991 lbs/1000 lbs	449 kg/454 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX/Cobra / Duoprop)	STD/NA	STD/NA
Contra Rotation (SX/Cobra / Duoprop)	NA/STD	NA/STD
Remote Oil Filter	OPT	OPT
Engine Oil Cooler	NA	NA
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD

*Add 13^{3/16}" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

5.7GX/SX / 5.7GX/DP

	US	METRIC
Power (propshaft)	315 hp	235 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Throttle body fuel injection	Throttle body fuel injection
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	SX / Duoprop	SX / Duoprop
Gear Ratio	1.51:1/1.95:1	1.51:1/1.95:1
Gear Ratio, High Altitude	1.60:1	1.60:1
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX / Duoprop)	991 lbs/1000 lbs	449 kg/454 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX / Duoprop)	STD/NA	STD/NA
Contra Rotation (SX / Duoprop)	NA/STD	NA/STD
Remote Oil Filter	OPT	OPT
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD

*Add 13^{3/16}" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

8.1Gi/DP

	US	METRIC
Power (propshaft)	375 hp	280 kw
Displacement	496 cu. in.	8.1 L
Cylinders	8	8
Bore / Stroke	4.25" x 4.37"	108 mm x 111 mm
Compression Ratio	8.0:1	8.0:1
Main Bearings	5	5
Fuel System	Multi-port fuel injection	Multi-port fuel injection
Full Throttle Operating Range	4200-4600 rpm	4200-4600 rpm

DRIVE UNIT

Model	Duoprop	Duoprop
Gear Ratio	1.78:1	1.78:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	38 ¹ / ₂ "	98 cm
*Height - Above Crankshaft	21 ¹ / ₄ "	54 cm
Centerline		
Total Weight	1230 lbs	558 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation (Duoprop)	STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD

*Add 13³/₁₆" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

7.4GSI/DP

	US	METRIC
Power (propshaft)	385 hp	287 kw
Displacement	454 cu. in.	7.4 L
Cylinders	8	8
Bore / Stroke	4.25" x 4.00"	108 mm x 102 mm
Compression Ratio	8.6:1	8.6:1
Main Bearings	5	5
Fuel System	Multi-port fuel injection	Multi-port fuel injection
Full Throttle Operating Range	4800-5200 rpm	4800-5200 rpm

DRIVE UNIT

Model	Duoprop	Duoprop
Gear Ratio	1.78:1	1.78:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	38¹/₂"	98 cm
*Height - Above Crankshaft	21¹/₂"	55 cm
Centerline		
Total Weight (Duoprop)	1210 lbs	549 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation (Duoprop)	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD

*Add 13³/₁₆ / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

8.2GSI/DP

	US	METRIC
Power (propshaft)	415 hp	310 kw
Displacement	502 cu. in.	8.2 L
Cylinders	8	8
Bore / Stroke	4.47" x 4.00"	114 mm x 102 mm
Compression Ratio	8.6:1	8.6:1
Main Bearings	5	5
Fuel System	Multi-port fuel injection	Multi-port fuel injection
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	Duoprop	Duoprop
Gear Ratio	1.78:1	1.78:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	38 ¹ / ₂ "	98 cm
*Height - Above Crankshaft	21 ¹ / ₂ "	55 cm
Centerline		
Total Weight (Duoprop)	1210 lbs	549 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation (Duoprop)	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD

*Add 13³/₁₆" / 34 cm for height above anti-ventilation plate NA = Not Available



STERN DRIVE SPECIFICATIONS

ENGINE

8.1GSi/DP

	US	METRIC
Power (propshaft)	420 hp	313 kw
Displacement	496 cu. in.	8.1 L
Cylinders	8	8
Bore / Stroke	4.25" x 4.37"	108 mm x 111 mm
Compression Ratio	8.6:1	8.6:1
Main Bearings	5	5
Fuel System	Multi-port fuel injection	Multi-port fuel injection
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	Duoprop	Duoprop
Gear Ratio	1.78:1	1.78:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	38 ¹ / ₂ "	98 cm
*Height - Above Crankshaft Centerline	21 ¹ / ₂ "	55 cm
Total Weight (Duoprop)	1230 lbs	558 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Cone Clutch Shifting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation (Duoprop)	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD

*Add 13³/₁₆" / 34 cm for height above anti-ventilation plate NA = Not Available



INBOARD SPECIFICATIONS

ENGINE

5.7GSI

	US	METRIC
Power (propshaft)	280 hp	209 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Throttle body fuel injection	Throttle body fuel injection
Choke	Automatic	Automatic
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	ZF Hurth 630V	ZF Hurth 630V
Gear Ratio	2.5:1	2.5:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R

DIMENSIONS

Length	53"	93 cm
*Height - Above Crankshaft	22"	56 cm
Centerline		
Total Weight	978 lbs	444 kg

STANDARD / OPTIONAL FEATURES

Hydraulic Multi-Disk Clutch Shifting	STD	STD
High Output Alternator	STD	STD
High-Solid Paint Finish	STD	STD
Easy Access Water Pump	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD



INBOARD SPECIFICATIONS

ENGINE

5.7GXi

	US	METRIC
Power (propshaft)	315 hp	235 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Throttle body fuel injection	Throttle body fuel injection
Choke	Automatic	Automatic
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	ZF Hurth 630V	ZF Hurth 630V
Gear Ratio	2.5:1	2.5:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R

DIMENSIONS

Length	53"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX / Duoprop)	978 lbs	444 kg

STANDARD / OPTIONAL FEATURES

Hydraulic Multi-Disk Clutch Shifting	STD	STD
High Output Alternator	STD	STD
High-Solid Paint Finish	STD	STD
Easy Access Water Pump	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Owner Protection	STD	STD
Electronic Eng. Mgmt. System	STD	STD

*Add 13^{3/16}" / 34 cm for height above anti-ventilation plate NA = Not Available



ELECTRIC TROLLING MOTOR SPECIFICATIONS

	Intruder 44F	
	US	METRIC
Full-Power Static Thrust	44 lbs	191 N
Motor Type	Direct Drive Permanent Magnet	Direct Drive Permanent Magnet
Mounting System	Deck; Bolt-on w/hold down strap	Deck; Bolt-on w/hold down strap
Shaft Length	42"	107 cm
Steering	Foot 360 degree	Foot 360 degree
Cable Length	5'	152 cm
Operating Voltage	12v	12v
Operating Current	36 amps	36 amps
Recommended Battery	One 100 amp Hr Deep Cycle	One 100 amp Hr Deep Cycle
Vertical Adjustment	13"	33 cm
Speed Control	5 speeds	5 speeds
Weight	43 lbs	20 kg
Propeller	2 Blade weedless	2 Blade weedless
Weedless End Cap	Yes	Yes
Impact Protection	Yes	Yes



OUTBOARD SPECIFICATIONS

	90 VL	
	US	METRIC
Shaft Length	20"	51 cm
Weight	319 lbs	144 kg
Engine Type 60°V4	Loop Charged 60°V4 Oil Injection	Loop Charged 60°V4 Oil Injection
Bore, Stroke	3.60" x 2.59"	91 mm x 66 mm
Displacement	105 cu. in.	1730 c.c.
Starting	Electric 12-volt key switch Quickstart™ Electronic Starting	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	Power trim & tilt standard	Power trim & tilt standard
Propshaft Power	90-HP at 5000 RPM	67-KW at 5000 RPM
Full-Throttle Operating Range	4500-5500 RPM	4500-5500 RPM
Gear Ratio/Shift	13:26 (.5)/F-N-R	13:26 (.5)/F-N-R
Fuel System	2 dual throat carburetors	2 dual throat carburetors
Alternator	5/12 amp with voltage regulator	5/12 amp with voltage regulator
Cooling	Automatic pressure- temperature controlled S.L.O.W.™	Automatic pressure- temperature controlled S.L.O.W.™

Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

ALL OUTBOARD MODELS

MAXIMUM BOAT HORSEPOWER: Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

FUEL FACTS: All 2001 Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Johnson TC-W3 outboard lubricant. If Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



OUTBOARD SPECIFICATIONS

	115 VL	
	US	METRIC
Shaft Length	20"	51 cm
Weight	319 lbs	144 kg
Engine Type 60°V4	Loop Charged 60°V4 Oil Injection	Loop Charged 60°V4 Oil Injection
Bore, Stroke	3.60" x 2.59"	91 mm x 66 mm
Displacement	105 cu. in.	1730 c.c.
Starting	Electric 12-volt key switch Quickstart™ Electronic Starting	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	Power trim & tilt standard	Power trim & tilt standard
Propshaft Power	115-HP at 5000 RPM	86-KW at 5000 RPM
Full-Throttle Operating Range	4500-5500 RPM	4500-5500 RPM
Gear Ratio/Shift	13:26 (.5)/F-N-R	13:26 (.5)/F-N-R
Fuel System	2 dual-throat carburetors	2 dual-throat carburetors
Alternator	5/12 amp with voltage regulator	5/12 amp with voltage regulator
Cooling	Automatic pressure- temperature controlled S.L.O.W.™	Automatic pressure- temperature controlled S.L.O.W.™

Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

ALL OUTBOARD MODELS

MAXIMUM BOAT HORSEPOWER: Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

FUEL FACTS: All 2001 Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Johnson TC-W3 outboard lubricant. If Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



OUTBOARD SPECIFICATIONS

	115 FSL	
	US	METRIC
Shaft Length	20"	51 cm
Weight	349 lbs	158 kg
Engine Type 60°V4	Loop Charged 60°V4 Oil Injection	Loop Charged 60°V4 Oil Injection
Bore, Stroke	3.60" x 2.59"	91 mm x 66 mm
Displacement	105 cu. in.	1730 c.c.
Starting	Electric 12-volt key switch Quickstart™ Electronic Starting	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	Power trim & tilt standard	Power trim & tilt standard
Propshaft Power	115-HP at 5500 RPM	86-KW at 5500 RPM
Full-Throttle Operating Range	5250-5750 RPM	5250-5750 RPM
Gear Ratio/Shift	13:26 (.5)/F-N-R	13:26 (.5)/F-N-R
Fuel System	FICHT™ RAM fuel injection	FICHT™ RAM fuel injection
Alternator	35 amp with voltage regulator	35 amp with voltage regulator
Cooling	Automatic pressure- temperature controlled S.L.O.W.™	Automatic pressure- temperature controlled S.L.O.W.™

Evinrude outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

ALL OUTBOARD MODELS

MAXIMUM BOAT HORSEPOWER: Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

FUEL FACTS: All 2001 Evinrude Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude TC-W3 outboard lubricant. If Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



OUTBOARD SPECIFICATIONS

	135 VX	
	US	METRIC
Shaft Length	25"	63 cm
Weight	378 lbs	171 kg
Engine Type	Loop Charged 90°V4 Oil Injection	Loop Charged 90°V4 Oil Injection
Bore, Stroke	3.69" x 2.86"	94 mm x 73 mm
Displacement	122 cu. in.	2000 c.c.
Starting	Electric 12-volt key switch Quickstart™ Electronic Starting	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	Power trim & tilt standard	Power trim & tilt standard
Propshaft Power	135-HP at 5500 RPM	101-KW at 5500 RPM
Full-Throttle Operating Range	5000-6000 RPM	5000-6000 RPM
Gear Ratio/Shift	12:27 (.44) F-N-R	12:27 (.44) F-N-R
Fuel System	2 dual-throat carburetors	2 dual-throat carburetors
Alternator	3/9 amp with voltage regulator	3/9 amp with voltage regulator
Cooling	Automatic pressure- temperature controlled S.L.O.W.™	Automatic pressure- temperature controlled S.L.O.W.™

Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

ALL OUTBOARD MODELS

MAXIMUM BOAT HORSEPOWER: Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

FUEL FACTS: All 2001 Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Johnson TC-W3 outboard lubricant. If Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



OUTBOARD SPECIFICATIONS

	150 VX	
	US	METRIC
Shaft Length	25"	63 cm
Weight	375 lbs	170 kg
Engine Type	Loop Charged 60° V6 Oil Injection	Loop Charged 60° V6 Oil Injection
Bore, Stroke	3.60" x 2.59"	91 mm x 66 mm
Displacement	158 cu. in.	2589 c.c.
Starting	Electric 12-volt key switch Quickstart™ Electronic Starting	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	Power trim & tilt standard	Power trim & tilt standard
Propshaft Power	150-HP at 5000 RPM	112-KW at 5000 RPM
Full-Throttle Operating Range	4500-5500 RPM	4500-5500 RPM
Gear Ratio/Shift	14:26 (.54)/F-N-R	14:26 (.54)/F-N-R
Fuel System	2 triple-throat carburetors	2 triple-throat carburetors
Alternator	35 amp with voltage regulator	35 amp with voltage regulator
Cooling	Automatic pressure- temperature controlled S.L.O.W.™	Automatic pressure- temperature controlled S.L.O.W.™

Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

ALL OUTBOARD MODELS

MAXIMUM BOAT HORSEPOWER: Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

FUEL FACTS: All 2001 Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Johnson TC-W3 outboard lubricant. If Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.

150 PX Johnson is an Ocean Pro model.



OUTBOARD SPECIFICATIONS

	150 FPX	
	US	METRIC
Shaft Length	25"	63 cm
Weight	410 lbs	166 kg
Engine Type	Loop Charged 60°V6 Oil Injection	Loop Charged 60°V6 Oil Injection
Bore, Stroke Displacement	3.60" x 2.59" 158 cu. in.	91 mm x 66 mm 2589 c.c.
Starting	Electric 12-volt key switch Electronic Starting	Electric 12-volt key switch Electronic Starting
Trim	Power trim & tilt standard	Power trim & tilt standard
Propshaft Power	150-HP at 5000 RPM	112-KW at 5000 RPM
Full-Throttle Operating Range	4800-5300 RPM	4800-5300 RPM
Gear Ratio/Shift	14:26 (.54) / F-N-R	14:26 (.54) / F-N-R
Fuel System	FICHT™ RAM Fuel Injection	FICHT™ RAM Fuel Injection
Alternator	60 amp with voltage regulator & battery isolator	60 amp with voltage regulator & battery isolator
Cooling	Automatic pressure- temperature controlled S.L.O.W.™	Automatic pressure- temperature controlled S.L.O.W.™

Evinrude outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

ALL OUTBOARD MODELS

MAXIMUM BOAT HORSEPOWER: Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

FUEL FACTS: All 2001 Evinrude Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Johnson TC-W3 outboard lubricant. If Evinrude Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



OUTBOARD SPECIFICATIONS

	175 FPX	
	US	METRIC
Shaft Length	25"	63 cm
Weight	410 lbs	186 kg
Engine Type	Loop Charged 60° V6 Oil Injection	Loop Charged 60° V6 Oil Injection
Bore, Stroke	3.60" x 2.59"	91 mm x 66 mm
Displacement	158 cu. in.	2589 c.c.
Starting	Electric 12-volt key switch Electronic Starting	Electric 12-volt key switch Electronic Starting
Trim	Power trim & tilt standard	Power trim & tilt standard
Propshaft Power	175-HP at 5500 RPM	131-KW at 5500 RPM
Full-Throttle Operating Range	5300-5800 RPM	5300-5800 RPM
Gear Ratio/Shift	14:26 (.54)/F-N-R	14:26 (.54)/F-N-R
Fuel System	FICHT™ RAM Fuel Injection	FICHT™ RAM Fuel Injection
Alternator	60 amp with voltage regulator & battery isolator	60 amp with voltage regulator & battery isolator
Cooling	Automatic pressure- temperature controlled S.L.O.W.™	Automatic pressure- temperature controlled S.L.O.W.™

Evinrude outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.




ALL OUTBOARD MODELS

MAXIMUM BOAT HORSEPOWER: Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

FUEL FACTS: All 2001 Evinrude Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Johnson TC-W3 outboard lubricant. If Evinrude Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



DIMENSIONAL DATA

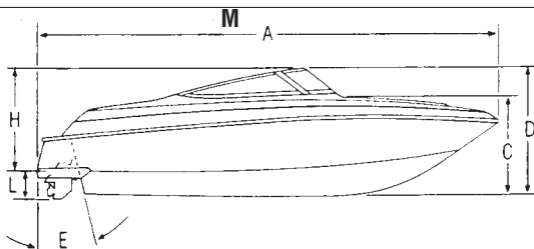

- A. LOA**
- B. BEAM**
- C. KEEL TO W/S SHELF**
- D. TOTAL HEIGHT**
- E. TRANSOM ANGLE**
- F. DEAD RISE**
- G. OB TRANSOM HEIGHT**
- H. BRIDGE CLEARANCE**
- I. COCKPIT HEIGHT**
- J. COCKPIT HEIGHT HELM**
- K. FREEBOARD**
- L. DRAFT**
- M. STORAGE LENGTH - With outdrive in raised position**



WINNING EDGESM

FOUR WINNS LIMITED ONE YEAR BOAT AND TRAILER WARRANTY

1. Four Winns Boat Company, hereinafter "FOUR WINNS," warrants each boat and trailer to be free from defects in material and workmanship for a period of twelve (12) months from date of sale to original retail customer, or twenty-four (24) months from date of manufacture. This warranty does not apply to tires which are covered under a separate manufacturer's warranty. This warranty is transferable.
2. The Warranty Registration Card shall identify the product purchased by serial number and must be completed and returned to the factory **by the Dealer within ten (10) days of date of sale to boat owner.**
3. Under this warranty, FOUR WINNS' obligation is limited. FOUR WINNS, at its option, may repair or replace those boat/trailer parts that have become defective within the warranty period because of faulty materials or workmanship. FOUR WINNS may provide for the repair or replacement of any defective part at the FOUR WINNS dealership or service center. Optionally, FOUR WINNS may return the boat to the factory. All repairs under this warranty will be free of charge. Return transportation of any kind is to be paid for by the owner.
4. FOUR WINNS reserves the right to improve products and does not guarantee the availability of all product features and options as displayed in the FOUR WINNS catalog. FOUR WINNS further reserves the right to change specifications and prices without obligation to incorporate improvements in boats manufactured previous to such improvements or in trailers manufactured previous to such improvements.
5. If a boat or trailer or part should become defective within the warranty period, advance authorization by FOUR WINNS shall be necessary before any part is replaced or any defect is corrected by a service representative, otherwise FOUR WINNS shall not be liable for the expense of the replacement or correction.
6. In applying for authorization, the repairing dealer shall supply to FOUR WINNS the following information (A) owner's name and address, (B) boat or trailer serial number, (C) description of defect, (D) date of sale, (E) estimate of repairs.
7. Dealers are not agents of FOUR WINNS. FOUR WINNS does not authorize any person to create for it any other obligation or liability in connection with this boat or trailer.
8. ALL INCIDENTAL AND/OR CONSEQUENTIAL DAMAGES ARE EXCLUDED. IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PURPOSE ARE LIMITED TO THE DURATION OF THIS WARRANTY. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusions may not apply to you.

This warranty gives you specific legal rights and you may also have other legal rights which vary from state to state.



WINNING EDGESM

EXCLUSIONS FROM COVERAGE

The following items are excluded from coverage under this PLAN.

1. Gradual reduction in operating performance due to normal wear and tear.
2. Tear down and repair costs if it is established that the part or parts thought to be defective are not covered under this PLAN.
3. Any part which is covered by insurance or a manufacturer's warranty, or a breakdown which is a result of a mechanical defect that the manufacturer has acknowledged and/or will repair at its expense.
4. Failure of boat gel-coat due to the following: chips and scratches not listed on freight damage report, fading, cracking, blistering or other cosmetic repairs before and after delivery.
5. Trailer paint due to the following: fading, peeling, chips, scratches or rusting attributed to shipping, handling or normal usage.
6. Improper setup of boat on trailer or modification of trailer to accommodate other manufacturer's boats. Normal maintenance of trailer brake system to include bleeding and adjusting brakes, and replacement of components due to normal usage. Replacement and maintenance of trailer pads and lighting systems.
7. Windshield breakage and adjustment, damage to vinyl, upholstery and carpet.
8. Boat canvases including convertible tops and components, tonneau covers and mooring covers. This will include adjustment of fit and snap replacement from normal usage.
9. Damage resulting from electrolysis or corrosion of any nature from any source.
10. Normal maintenance items to include rusting stainless steel parts, miscellaneous screw tightening, and decorative striping.
11. Any part failure caused by insufficient coolants or lubricants, fuel contamination, competitive driving or racing, or failure to service as recommended by the manufacturer.
12. Loss or damage which is the result of any accident, collision, theft, fire, freezing, vandalism, riot, explosion, lightning, earthquakes, windstorm, hail, water, flood, neglect, or abuse.
13. All of the following (unless required in connection with the repair or replacement of a covered part): Adjustments, engine tune-ups, seals, gaskets, oils, greases, other lubricants, valve grindings, spark plugs, and clamps.
14. Any part which has been modified or altered in any way from original factory specifications so as to adversely affect the performance, operation or durability of the part.



WINNING EDGESM

15. Propellers, prop shafts, prop seals, outdrive water pumps, or damage to stern drive or hull if resulting from collision.
16. Demolding of wood materials from dry rot.
17. Any failure resulting from improper pre-delivery.

WHAT OWNER SHALL DO

In the event of a failure of a PRODUCT covered by this PLAN, PRODUCT must be returned to the original selling dealer or to a dealer authorized to service the PRODUCT. The cost of returning PRODUCT to and from dealer will be paid for by owner.

Owner agrees throughout the full term of the PLAN to follow the maintenance schedules as set forth in PRODUCT Owner's Manual. Receipts showing dates and services performed must be kept and furnished to dealer if requested by FOUR WINNS

GENERAL PROVISIONS

FOUR WINNS' responsibility in respect to this PLAN is limited to paying for repairs or replacement of a part or parts found to be defective in materials or workmanship, and no claims for breach of this PLAN will be cause for cancellation or rescission of the sale of PRODUCT.

Owner's registration card shall be presented to the dealer whenever owner requests service.

This PLAN is limited expressly to the terms and conditions herein set forth and cannot be modified or amended except by written agreement between FOUR WINNS and owner.

WHAT TO DO IN THE EVENT OF A CLAIM FOR SERVICE UNDER THIS PLAN

Customer must return product to the original selling dealer. If dealer is no longer selling the FOUR WINNS product or if customer has moved to another location, then customer should call FOUR WINNS for assistance to locate the nearest FOUR WINNS dealer in his area.

- Dealer will call and receive authorization number for repairs.
- Upon completion of repairs, customer is to pay dealer any monies due for non-covered items.
- Purchaser assumes all liability for payment of non-authorized repairs.
- Customer must sign FOUR WINNS warranty claim form.
- If unable to return to your selling dealer:
Call or fax the claims department at Four Winns, Cadillac, Michigan
Phone: 231-775-1343
Fax: 231-779-2345
E-Mail: boating@fourwinns.com



WINNING EDGESM

IMPORTANT: Do not agree to any repairs until dealer receives claim or authorization number!

TRANSFER OF THIS PLAN

All rights and terms of this PLAN may be transferred to new owners of the covered PRODUCT by the following method:

- A request for transfer must be made by the new owner in writing to FOUR WINNS.
- Send the former owner's plastic registration card, if available, along with a copy of the bill of sale and Fifty Dollars (\$50.00) to:
FOUR WINNS
925 Frisbie Street
Cadillac, MI 49601
ATTN: Customer Service Dept.
- FOUR WINNS' issuance of a new owner's card is proof of acceptance of transfer.
- The new owner agrees to all items and conditions of the PLAN.
- Only the UNUSED portion of this PLAN will apply to the new owner.

ADDITIONAL PROVISIONS

This PLAN does not provide coverage for:

1. Options or accessories not installed by FOUR WINNS.
2. Damages or failures due to inadequate or improper storage or lay up service.
3. Repair or replacements not authorized by the FOUR WINNS claim department.
4. Any boat or trailer used for commercial purposes including but not limited to hauling, transferring, chartering purposes, or governmental use.

In no event shall FOUR WINNS be responsible to purchaser for INCIDENTAL, CONSEQUENTIAL, OR OTHER DAMAGES including, but not limited to expenses for gasoline, mechanic's travel time, telephone charges, towing charges, rental of like product while service is being performed, travel, lodging, loss or damage to personal property, loss of use of product, loss of time or inconvenience.



WINNING EDGESM

FOUR WINNS LIMITED TWO-YEAR POWER TRAIN WARRANTY

(Applies to boats sold in the United States and Canada only)

This PLAN commences with the date of sale and shall be extended for twenty-four (24) months, covering the factory installed VOLVO PENTA power train only. The services of this PLAN shall be administered by VOLVO PENTA. Please refer to the VOLVO PENTA Owner's Manual for provisions as noted in its written warranty. Diesels are also covered under this plan.

FICHT OUTBOARDS all carry a 2 year manufacturer's warranty. All other outboard models, boats used commercially, or as rentals are excluded from this PLAN. This PLAN is not offered on boats sold outside the United States and Canada. (See International Warranty below)

The terms and conditions of this PLAN extend to the original and subsequent purchasers of the PRODUCT (subject to compliance with the transfer terms outlined above). **However, in no event shall the duration of this PLAN exceed twenty-four months from the first retail sale.**

INTERNATIONAL - POWER TRAIN WARRANTY

(Applies to boats sold outside of the United States and Canada)

Any matter involving the power train is the responsibility of the manufacturer or his authorized representative. Power train warranty is according to that offered by the manufacturer of the product, or his authorized representative in the specific country and should be addressed to them.

FOUR WINNS LIMITED FIVE-YEAR STRUCTURAL HULL WARRANTY

FOUR WINNS warrants to original and subsequent purchasers each boat hull to be free from structural defects in material and workmanship for a period of sixty (60) months from the first retail sale, or seventy-two (72) months from date of manufacture.

Under this warranty, FOUR WINNS' obligation is limited. FOUR WINNS, at its option, may repair or replace those hulls found defective during the warranty period. At no time shall repair or replacement cost exceed the retail market value of said boat at time of failure. Return transportation cost of any and all kinds will be paid for by the boat owner.



WINNING EDGESM

THIS WARRANTY DOES NOT APPLY TO:

*Gel-coats and/or paints for:

- A. Fading
- B. Discoloring
- C. Peeling
- D. Chipping
- E. Blistering
- F. Spider/hairline cracks that are only cosmetic in nature

*Structural damage caused by:

- A. Improper trailer setup
- B. Inadequate or improper storage
- C. Repairs not authorized by FOUR WINNS
- D. Modification and/or alterations from original factory specifications
- E. Dry rotting and/or delaminated wood parts resulting from improper maintenance.

*Boats used for commercial or competitive purposes.

ALL INCIDENTAL AND/OR CONSEQUENTIAL DAMAGES ARE EXCLUDED FROM THIS WARRANTY. IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PURPOSE ARE IN ANY EVENT LIMITED TO THE DURATION OF THIS WARRANTY.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion on limitation of incidental or consequential damage, so the above limitations may not apply. This warranty gives you specific legal rights and you may also have other legal rights which vary from state to state.

This warranty is transferable if boat is sold during the duration of the warranty and is not limited to original owner.