



# TABLE OF CONTENTS

<b>MINI JET BOATS</b>	<b>PAGES</b>
Fling	2, 3, 4
<b>SPORTBOATS</b>	
Freedom	6, 7, 8, 9, 10
190 Horizon	12, 13, 14, 15, 16
200 Horizon	18, 19, 20, 21
203 Horizon Coast Runner	22, 23, 24, 25
220 Horizon	26, 27, 28, 29
240 Horizon	30, 31, 32
<b>DECK BOATS</b>	
214 Candia	34, 35, 36
<b>CUDDYS</b>	
195 Sundowner	38, 39, 40
205 Sundowner	42, 43, 44, 45
225 Sundowner	46, 47, 48, 49
245 Sundowner	50, 51, 52
<b>TRAILERABLE CRUISERS</b>	
238 Vista	54, 55, 56
258 Vista	58, 59, 60
278 Vista	62, 63, 64
<b>TRAILER SPECIFICATIONS</b>	
Fling	66
Freedom	68
Horizon	70, 71, 72, 73, 74
Candia	76
Sundowner	78, 79, 80, 81
Vista	82, 83, 84
<b>JET DRIVE SPECIFICATIONS</b>	86
<b>OB SPECIFICATIONS</b>	88, 89, 90, 91, 92, 93, 94
<b>IO SPECIFICATIONS</b>	96, 97, 98, 99, 100, 101, 102
<b>DIMENSIONAL DATA</b>	104
<b>WINNING EDGE</b>	106, 107, 108, 109, 110



# FLING

SPECIFICATIONS*	US	METRIC
LOA:	<b>14'2"</b>	4.32 m
Beam:	<b>6'4"</b>	1.93 m
Total Height:	<b>39"</b>	98 cm
Deadrise:	<b>18°</b>	18°
Bridge Clearance:	<b>2'6"</b>	75 cm
Cockpit Height (forward):	<b>24"</b>	60 cm
Cockpit Height (helm):	<b>21"</b>	53 cm
Freeboard (min.):	<b>18"</b>	45 cm
Draft:	<b>8"</b>	20 cm
Fuel:	<b>16 gal</b>	61 l
Passengers:	<b>4</b>	4
Maximum Capacity:	<b>650 lbs</b>	295 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
115 JE/V4	<b>115</b>	86	<b>1020</b>	463

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
<b>LBS</b>						
<b>FLING</b>	<b>115JE</b>	<b>770</b>	<b>250</b>	<b>20</b>	<b>100</b>	<b>80</b>
<b>KG</b>						
FLING	115JE	349	113	9	45	36



## PERFORMANCE

Power HP/KW	Impeller		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
115 JE/115/86	<b>6.5</b>	16.5	SST	<b>36-39</b>	58-63	<b>55</b>	88

## FUEL FLOW DATA - FLING WITH 115JE / 115 / 86

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>5</b>	8	<b>5</b>	19
2500	<b>8</b>	13	<b>5</b>	19
3000	<b>11</b>	18	<b>6</b>	23
3500	<b>17</b>	27	<b>6</b>	23
4000	<b>25</b>	40	<b>8</b>	31
4500	<b>31</b>	50	<b>10</b>	38
5000	<b>36</b>	58	<b>11</b>	42
WOT	<b>38</b>	61	<b>12</b>	46

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

- continued -



## OPTIONS

---

- Canvas, cockpit cover
  - Canvas, bimini top
  - Bow floor fill-in cushion
  - Bow lifting eye
  - Carpet, cockpit
  - Fire extinguisher, automatic
  - Fishing chair, removable bow
  - Ski pylon
  - Radio, AM-FM stereo
- Trailer Options:
- Aluminum wheels (exchange)
  - Galvanized trailer
  - Spare tire & wheel, white
  - Spare tire & wheel, aluminum/galvanized
  - Spare tire cover

Export pkg. I, II and III

# FREEDOM

SPECIFICATIONS*	US	METRIC
LOA:	<b>17'6"</b>	5.33 m
Beam:	<b>7'0"</b>	2.13 m
Keel to W/S Shelf:	<b>39"</b>	99 cm
Total Height:	<b>54"</b>	1.37 m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>18°</b>	18°
OB Transom Height:	<b>20"</b>	51 cm
Bridge Clearance:	<b>3'8"</b>	1.12 m
Cockpit Height (stern):	<b>26"</b>	66 cm
Cockpit Height (helm):	<b>26"</b>	66 cm
Freeboard (min.):	<b>(IO) 23" (OB) 25"</b>	(IO) 58 cm (OB) 64 cm
Draft (drive down):	<b>(IO) 26" (OB) 24"</b>	(IO) 66 cm (OB) 61 cm
Fuel:	<b>20 gal</b>	76 l
Passengers:	<b>(IO) 7 (OB) 7</b>	(IO) 7 (OB) 7
Maximum Capacity:	<b>(IO) 1145 (OB) 1800 lbs</b>	(IO) 513(OB) 816 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
90 TL/V4 (OB)*	<b>90</b>	67	<b>1620</b>	735
90 SL/V4 (OB)*	<b>90</b>	67	<b>1640</b>	744
115 TL/V4 (OB)*	<b>115</b>	86	<b>1620</b>	735
115 SL/V4 (OB)*	<b>115</b>	86	<b>1640</b>	744
130 TL/V4 (OB)*	<b>130</b>	97	<b>1680</b>	762
3.0 L/L4 (IO)	<b>135</b>	101	<b>2070</b>	939
4.3 L/V6 (IO)	<b>160</b>	119	<b>2210</b>	1001

\*Johnson® or Evinrude TL includes power tilt, trim & VRO™.

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>170F IO</b>	<b>3.0 L</b>	<b>1370</b>	<b>700</b>	<b>40</b>	<b>120</b>	<b>150</b>	<b>650</b>
<b>170F OB</b>	<b>115 SL</b>	<b>1320</b>	<b>300</b>	<b>40</b>	<b>120</b>	<b>150</b>	<b>650</b>
<b>KG</b>							
170F IO	3.0 L	626	317	18	54	68	295
170F OB	115 SL	599	136	18	54	68	295



## PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
90 TL/90/67	<b>13<sup>1</sup>/<sub>4</sub> x 17</b>	34 x 43	AL	<b>39-41</b>	62-66	<b>90</b>	144
90 SL/90/67	<b>13 x 19</b>	33 x 48	AL	<b>42-44</b>	67-70	<b>90</b>	144
115 TL/115/86	<b>13 x 19</b>	33 x 48	AL	<b>42-44</b>	67-70	<b>90</b>	144
115 SL/115/86	<b>13 x 19</b>	33 x 48	AL	<b>44-46</b>	70-74	<b>90</b>	144
130 TL/130/97	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>45-48</b>	72-77	<b>80</b>	128
3.0 L/135/101	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>41-43</b>	66-69	<b>90</b>	144
4.3 L/160/119	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>45-48</b>	72-77	<b>80</b>	128

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

## FUEL FLOW DATA - FREEDOM WITH 90TL / 90 / 67

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>7</b>	11	<b>4</b>	15
2500	<b>15</b>	24	<b>5</b>	19
3000	<b>22</b>	35	<b>6</b>	23
3500	<b>26</b>	42	<b>7</b>	27
4000	<b>30</b>	48	<b>8</b>	30
4500	<b>34</b>	54	<b>9</b>	34
5000	<b>38</b>	61	<b>10</b>	38
WOT	<b>40</b>	64	<b>10</b>	38

## FUEL FLOW DATA - FREEDOM WITH 90 SL / 90 / 67

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>4</b>	15
2500	<b>15</b>	24	<b>4</b>	15
3000	<b>23</b>	37	<b>5</b>	19
3500	<b>26</b>	42	<b>6</b>	23
4000	<b>30</b>	48	<b>7</b>	27
4500	<b>35</b>	56	<b>8</b>	30
5000	<b>39</b>	63	<b>9</b>	34
WOT	<b>42</b>	68	<b>11</b>	42



# FREEDOM

## FUEL FLOW DATA - FREEDOM WITH 115TL / 115 / 86

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>5</b>	19
2500	<b>17</b>	27	<b>7</b>	27
3000	<b>23</b>	37	<b>8</b>	30
3500	<b>27</b>	43	<b>9</b>	34
4000	<b>30</b>	48	<b>10</b>	38
4500	<b>35</b>	56	<b>11</b>	42
5000	<b>40</b>	64	<b>11</b>	42
WOT	<b>43</b>	69	<b>12</b>	45

## FUEL FLOW DATA - FREEDOM WITH 115 SL / 115 / 86

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>5</b>	19
2500	<b>18</b>	24	<b>6</b>	23
3000	<b>23</b>	37	<b>7</b>	27
3500	<b>27</b>	43	<b>8</b>	30
4000	<b>30</b>	48	<b>9</b>	34
4500	<b>35</b>	56	<b>10</b>	38
5000	<b>41</b>	66	<b>11</b>	42
WOT	<b>45</b>	72	<b>13</b>	49

## FUEL FLOW DATA - FREEDOM WITH 130TL / 130 / 97

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>5</b>	19
2500	<b>16</b>	26	<b>8</b>	30
3000	<b>23</b>	37	<b>10</b>	38
3500	<b>27</b>	43	<b>11</b>	42
4000	<b>32</b>	52	<b>12</b>	45
4500	<b>37</b>	60	<b>13</b>	49
5000	<b>41</b>	66	<b>14</b>	53
5500	<b>45</b>	72	<b>15</b>	57
WOT	<b>46</b>	74	<b>16</b>	61



## FUEL FLOW DATA - FREEDOM WITH 3.0L / 135 / 101

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>3</b>	11
2500	<b>19</b>	31	<b>4</b>	15
3000	<b>26</b>	42	<b>5</b>	19
3500	<b>32</b>	52	<b>7</b>	27
4000	<b>38</b>	61	<b>10</b>	38
4500	<b>41</b>	66	<b>11</b>	42
WOT	<b>42</b>	67	<b>12</b>	46

## FUEL FLOW DATA - FREEDOM WITH 4.3L / 160 / 119

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>11</b>	18	<b>4</b>	15
2500	<b>23</b>	37	<b>5</b>	19
3000	<b>29</b>	47	<b>7</b>	27
3500	<b>35</b>	56	<b>9</b>	34
4000	<b>42</b>	68	<b>13</b>	49
WOT	<b>47</b>	76	<b>15</b>	57

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





## OPTIONS

- Sun Sport (SS) interior (IO)
- Canvas, cockpit cover
- Canvas, cockpit cover & forward
- Canvas, forward
- Canvas, full
- Canvas, mooring cover
- Canvas, walk-through curtain
- Fish & ski package (OB)  
Ski pylon, forward  
fishing pedestal seat,  
trolling motor aft  
livewells with aerator,  
control panel, aft fishing  
pedestal seat
- Fish finder, Lowrance X-22A
- Fire extinguisher, automatic
- Gear ratio, high altitude
- Gelcoat, two-tone
- Livewell (aft)
- Prop, heavy load
- Prop, stainless steel (exchange)
- Seat, bucket (stbd)
- Seat, cushions (bow fill-in)
- Ski, pylon (OB)
- Steering hydraulic (90-115 HP OB only)
- Trailer Options
  - Brakes (delete)
  - Aluminum Wheels
  - Galvanized trailer
  - Spare tire & wheel, white
  - Spare tire & wheel aluminum galvanized
  - Spare tire cover
  - Trailer (delete)

Export pkg. I, II and III available.

# 190 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	<b>19'0"</b>	5.79 m
Beam:	<b>7'3"</b>	2.21 m
Keel to W/S Shelf:	<b>46"</b>	1.17 m
Total Height:	<b>61"</b>	1.55 m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>18°</b>	18°
OB Transom Height:	<b>20"</b>	51 cm
Bridge Clearance:	<b>3'9"</b>	1.14 m
Cockpit Height (stern):	<b>26"</b>	66 cm
Cockpit Height (helm):	<b>31"</b>	79 cm
Freeboard (min.):	<b>(IO)28" (OB) 29"</b>	71 cm / 74 cm
Draft (drive down):	<b>(IO)28" (OB)26"</b>	71 cm / 66 cm
Fuel:	<b>28 gal</b>	106 l
Passengers:	<b>8</b>	8
Maximum Capacity:	<b>1285 / 2000 lbs</b>	583 / 907 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
115 TL/V4 (OB)*	<b>115</b>	86	<b>2040</b>	925
115 SL/V4 (OB)*	<b>115</b>	86	<b>2050</b>	934
130 TL/V4 (OB)*	<b>130</b>	97	<b>2090</b>	948
150 SL/V6 (OB)*	<b>150</b>	112	<b>2100</b>	952
4.3L/V6 (IO)	<b>160</b>	119	<b>2460</b>	1120
5.0L/V8 (IO)	<b>190</b>	142	<b>2560</b>	1160
5.0L EFI / V8 (IO)	<b>215</b>	160	<b>2600</b>	1180

\*Johnson® or Evinrude® TL includes power tilt, trim & VRO™.

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>190H IO</b>	<b>5.0 L</b>	<b>1630</b>	<b>930</b>	<b>40</b>	<b>170</b>	<b>150</b>	<b>650</b>
<b>190H OB</b>	<b>130 TL</b>	<b>1725</b>	<b>365</b>	<b>40</b>	<b>170</b>	<b>150</b>	<b>650</b>
<b>KG</b>							
190H IO	5.0 L	739	422	18	77	68	293
190H OB	130 TL	782	166	18	77	68	293



## PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
115 TL/115/86	<b>13<sup>3</sup>/<sub>4</sub> x 15</b>	34 x 38	AL	<b>38-41</b>	61-66	<b>80</b>	129
115 SL/115/86	<b>13<sup>1</sup>/<sub>4</sub> x 17</b>	33 x 43	AL	<b>40-43</b>	64-69	<b>80</b>	145
130 TL/130/97	<b>13<sup>1</sup>/<sub>4</sub> x 17</b>	33 x 43	AL	<b>42-45</b>	68-72	<b>80</b>	129
150 SL/150/112	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>46-49</b>	74-79	<b>80</b>	129
4.3 L/160/119	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	36 x 48	AL	<b>42-45</b>	68-72	<b>100</b>	161
5.0 L/190/142	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>46-49</b>	74-79	<b>100</b>	161
5.0 EFI/215/160	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>49-52</b>	79-83	<b>100</b>	161

## FUEL FLOW DATA - 190 HORIZON WITH 115TL / 115 / 86

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>5</b>	19
2500	<b>17</b>	27	<b>7</b>	26
3000	<b>23</b>	37	<b>8</b>	30
3500	<b>27</b>	43	<b>9</b>	34
4000	<b>31</b>	50	<b>10</b>	38
4500	<b>35</b>	56	<b>11</b>	42
5000	<b>37</b>	60	<b>11</b>	42
WOT	<b>40</b>	64	<b>12</b>	45

## FUEL FLOW DATA - 190 HORIZON WITH 115SL / 115 / 86

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>3</b>	11
2500	<b>21</b>	34	<b>4</b>	15
3000	<b>26</b>	42	<b>5</b>	19
3500	<b>29</b>	47	<b>6</b>	23
4000	<b>33</b>	53	<b>7</b>	26
4500	<b>35</b>	56	<b>8</b>	30
5000	<b>39</b>	63	<b>10</b>	38
WOT	<b>42</b>	68	<b>13</b>	49

- continued -



### FUEL FLOW DATA - 190 HORIZON WITH 130TL / 130 / 97

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>5</b>	19
2500	<b>16</b>	26	<b>8</b>	30
3000	<b>23</b>	37	<b>10</b>	38
3500	<b>27</b>	43	<b>11</b>	42
4000	<b>32</b>	51	<b>12</b>	45
4500	<b>36</b>	58	<b>13</b>	49
5000	<b>39</b>	63	<b>14</b>	53
5500	<b>42</b>	68	<b>15</b>	57
WOT	<b>43</b>	69	<b>16</b>	61

### FUEL FLOW DATA - 190 HORIZON WITH 150 SL / 150 / 112

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>7</b>	11	<b>4</b>	15
2500	<b>15</b>	24	<b>5</b>	19
3000	<b>22</b>	35	<b>6</b>	23
3500	<b>27</b>	43	<b>9</b>	34
4000	<b>32</b>	52	<b>12</b>	45
4500	<b>38</b>	61	<b>14</b>	53
5000	<b>43</b>	69	<b>16</b>	61
WOT	<b>47</b>	76	<b>17</b>	64

### FUEL FLOW DATA - 190 HORIZON WITH 4.3L / 160 / 119

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>11</b>	18	<b>4</b>	15
2500	<b>23</b>	37	<b>5</b>	19
3000	<b>29</b>	47	<b>7</b>	26
3500	<b>36</b>	58	<b>9</b>	34
4000	<b>40</b>	64	<b>13</b>	49
WOT	<b>44</b>	71	<b>15</b>	57

### FUEL FLOW DATA - 190 HORIZON WITH 5.0L / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>3</b>	11
2500	<b>26</b>	42	<b>5</b>	19
3000	<b>29</b>	47	<b>8</b>	30
3500	<b>37</b>	66	<b>11</b>	42
4000	<b>43</b>	69	<b>15</b>	57
WOT	<b>47</b>	76	<b>17</b>	64

## FUEL FLOW DATA - 190 HORIZON WITH 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>3</b>	11
2500	<b>26</b>	42	<b>5</b>	19
3000	<b>30</b>	48	<b>8</b>	30
3500	<b>38</b>	61	<b>12</b>	45
4000	<b>44</b>	71	<b>16</b>	61
WOT	<b>50</b>	81	<b>18</b>	68

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## OPTIONS

---

- Sun Sport (SS) interior (IO only)
  - Automatic bilge switch
  - Canvas, bimini w/suntop delete
  - Canvas, camper (bimini/sides/aft)
  - Canvas, cockpit cover
  - Canvas, cockpit cover & forward
  - Canvas, full (fwd/side/aft)
  - Canvas, mooring cover
  - Canvas, walk thru curtain
  - Compass
  - Depth sounder
  - Fiberglass liner
  - Cockpit carpet for liner
  - Fish and ski pkg. (OB only)
  - Fish finder, Lowrance X-22A
  - Fire extinguisher, automatic (IO only)
  - Gear ratio, high altitude (IO)
  - Hour meter (IO only)
  - Livewell, aft (IO only)
  - Prop, heavy load
  - Prop, stainless (exchange)
  - Seat, bucket (stbd.)
  - Seat, bucket (both)
  - Seat, cushions (aft fill-in OB std.)
  - Seat, cushions (bow fill-in)
  - Ski pylon (OB only)
  - Steering, hydraulic (115 HP, OB only)
  - Steering, tilt wheel (IO only)
  - Table, engine box mount (IO, std. only)
  - Table with mount (OB & SS)
  - Walk-through door
  - Windshield wiper (stbd.)
- Trailer Options
- Trailer (tandem axle upgrade)
  - Brakes delete
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheel (white) (aluminum/galvanized)
  - Spare tire cover
  - Delete trailer

Export pkg. I, II and III available.

# 200 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	<b>20'2"</b>	6.12 m
Beam:	<b>7'4"</b>	2.24 m
Keel to W/S Shelf:	<b>52"</b>	1.32m
Total Height:	<b>66"</b>	1.68m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>19°</b>	19°
OB Transom Height:	<b>25"</b>	64 cm
Bridge Clearance:	<b>4'1"</b>	1.24 m
Cockpit Height (stern):	<b>31"</b>	79 cm
Cockpit Height (helm):	<b>34"</b>	86 cm
Freeboard (min.):	<b>(IO) 29" (OB) 31"</b>	(IO) 74 cm (OB) 79 cm
Draft (drive down):	<b>(IO) 30" (OB) 27"</b>	(IO) 76 cm (OB) 68cm
Fuel:	<b>35 gal</b>	133 l
Passengers:	<b>9</b>	9
Maximum Capacity:	<b>(IO) 1400 (OB) 2100 lbs</b>	(IO) 630 (OB) 952 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
130 TX/V4 (OB)*	<b>130</b>	97	<b>2480</b>	1120
150 EX/V6 (OB)*	<b>150</b>	112	<b>2480</b>	1120
175 EX/V6 (OB)*	<b>175</b>	131	<b>2480</b>	1120
4.3L/V6 (IO)	<b>160</b>	119	<b>2920</b>	1320
5.0L/V8 (IO)	<b>190</b>	142	<b>3020</b>	1360
5.0L EFI/V8 (IO)	<b>215</b>	160	<b>3060</b>	1380
5.8L EFI/V8 (IO)	<b>255</b>	190	<b>3150</b>	1420

\*Johnson® or Evinrude® TL includes power tilt, trim & VRO™.

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>200H IO</b>	<b>5.0 L</b>	<b>2090</b>	<b>930</b>	<b>50</b>	<b>210</b>	<b>150</b>	<b>850-990</b>
<b>200H OB</b>	<b>150 EX</b>	<b>2110</b>	<b>370</b>	<b>50</b>	<b>210</b>	<b>150</b>	<b>780-960</b>
<b>KG</b>							
200H IO	5.0 L	948	422	23	95	68	383-446
200H OB	150 EX	950	166	23	95	68	351-432

## PERFORMANCE

Power HP/KW Cruise Range	Propeller (Dia x Pitch)		Type	Top Speed		MI	KM
	IN	CM		MPH	KPH		
130 TX/130/97	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>40-43</b>	64-69	<b>120</b>	193
150 EX/150/112	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>43-46</b>	69-74	<b>120</b>	193
175 EX/175/131	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>47-50</b>	71-80	<b>120</b>	193
4.3 L/160/119	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>40-43</b>	64-69	<b>120</b>	193
5.0 L/190/142	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>44-47</b>	71-76	<b>120</b>	193
5.0 L EFI/215/160	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>46-49</b>	74-79	<b>130</b>	208
5.8 L EFI/255/190	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>49-52</b>	79-84	<b>120</b>	193

## FUEL FLOW DATA - 200 HORIZON WITH 130TX / 130 / 97

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>4</b>	15
2500	<b>17</b>	27	<b>5</b>	19
3000	<b>21</b>	34	<b>6</b>	23
3500	<b>26</b>	42	<b>8</b>	30
4000	<b>31</b>	50	<b>10</b>	38
4500	<b>34</b>	55	<b>12</b>	45
5000	<b>37</b>	60	<b>13</b>	49
5500	<b>40</b>	64	<b>14</b>	53
WOT	<b>42</b>	67	<b>15</b>	57

## FUEL FLOW DATA - 200 HORIZON WITH 150EX / 150 / 112

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>5</b>	19
2500	<b>18</b>	29	<b>6</b>	23
3000	<b>26</b>	42	<b>7</b>	27
3500	<b>31</b>	50	<b>9</b>	34
4000	<b>34</b>	55	<b>11</b>	42
4500	<b>39</b>	63	<b>13</b>	49
5000	<b>44</b>	71	<b>16</b>	61
WOT	<b>45</b>	72	<b>17</b>	64

- continued -





### FUEL FLOW DATA - 200 HORIZON WITH 175EX / 175 / 131

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	14	<b>5</b>	19
2500	<b>18</b>	29	<b>6</b>	23
3000	<b>26</b>	42	<b>7</b>	27
3500	<b>31</b>	50	<b>9</b>	35
4000	<b>34</b>	54	<b>11</b>	42
4500	<b>39</b>	62	<b>13</b>	50
5000	<b>44</b>	70	<b>16</b>	62
WOT	<b>49</b>	78	<b>18</b>	69

### FUEL FLOW DATA - 200 HORIZON WITH 4.3L / 160 / 119

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>4</b>	15
2500	<b>20</b>	32	<b>5</b>	19
3000	<b>25</b>	40	<b>7</b>	26
3500	<b>32</b>	51	<b>10</b>	38
4000	<b>37</b>	59	<b>13</b>	49
WOT	<b>41</b>	66	<b>15</b>	57

### FUEL FLOW DATA - 200 HORIZON WITH 5.0L / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	14	<b>5</b>	19
2500	<b>25</b>	40	<b>6</b>	23
3000	<b>31</b>	50	<b>8</b>	30
3500	<b>38</b>	61	<b>11</b>	42
4000	<b>42</b>	67	<b>15</b>	57
WOT	<b>45</b>	72	<b>17</b>	64

### FUEL FLOW DATA - 200 HORIZON WITH 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>6</b>	23
2500	<b>26</b>	42	<b>7</b>	23
3000	<b>32</b>	51	<b>9</b>	34
3500	<b>37</b>	59	<b>12</b>	45
4000	<b>42</b>	67	<b>16</b>	61
WOT	<b>48</b>	77	<b>19</b>	73



## FUEL FLOW DATA - 200 HORIZON WITH 5.8L EFI / 255 / 190

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>6</b>	23
2500	<b>27</b>	43	<b>8</b>	30
3000	<b>35</b>	56	<b>10</b>	38
3500	<b>41</b>	66	<b>13</b>	49
4000	<b>46</b>	74	<b>16</b>	61
WOT	<b>51</b>	82	<b>20</b>	77

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

## OPTIONS

- Sun Sport (SS) interior (IO)
- Automatic bilge switch
- Bucket both
- Canvas, bimini top
- Canvas, bimini w/suntop delete
- Canvas, bow camper (bimini/sides/aft)
- Canvas, cockpit cover
- Canvas, cockpit cover & forward
- Canvas, full (std. top/side/aft)
- Canvas, mooring cover
- Canvas, walk thru curtain
- Cockpit carpet liner
- Compass
- Cushions, euro wrap, couch fill-in (OB)
- Depth sounder
- Fiberglass liner (requires tandem trailer)
- Fire extinguisher, automatic
- Fish finder, Lowrance X-22A
- Gear ratio, high altitude (IO)
- Hour meter (IO only)
- Livewell (aft) (IO)
- Prop, heavy load
- Prop, stainless steel (exchange)
- Seat, bucket (stbd.)
- Seat, cushions (aft, fill-in, OB)
- Seat, cushions (bow fill-in, OB)
- Ski pylon
- Steering, tilt wheel (IO only)
- Table, engine box mount
- Table with mount (OB)
- Walk-through door
- Windshield wiper (std.)
- Trailer Options:
  - Brakes delete
  - Brakes (2nd axle)
  - Aluminum wheels (exchange)
  - Galvanized trailer
  - Spare tire & wheel (white aluminum galvanized)
  - Spare tire cover
  - Trailer (delete)
  - Trailer (tandem axle upgrade)

Export pkg. I, II and III available.

# 203 HORIZON COAST RUNNER

SPECIFICATIONS*	US	METRIC
LOA:	<b>20'2"</b>	6.12 m
Beam:	<b>7'4"</b>	2.24 m
Keel to W/S Shelf:	<b>56"</b>	1.42 m
Total Height:	<b>70"</b>	1.78 m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>19°</b>	19°
OB Transom Height:	<b>25"</b>	64 cm
Bridge Clearance:	<b>4'9"</b>	1.45 m
Cockpit Height (stern):	<b>25"</b>	64 cm
Cockpit Height (helm):	<b>35"</b>	89 cm
Freeboard (min.):	<b>30"</b>	76 cm
Draft (drive down):	<b>27"</b>	68 cm
Fuel:	<b>65 gal</b>	247 l
Passengers:	<b>9</b>	9
Maximum Capacity:	<b>2350 lbs</b>	1070 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
130 TX/V4 (OB)*	<b>130</b>	97	<b>2620</b>	1190
150 EX/V6 (OB)*	<b>150</b>	112	<b>2610</b>	1180
175 EX/V6 (OB)*	<b>175</b>	131	<b>2610</b>	1180

\*Johnson® or Evinrude® TL includes power tilt, trim & VRO™.

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>200C</b>	<b>150 EX</b>	<b>2240</b>	<b>370</b>	<b>40</b>	<b>210</b>	<b>150</b>	<b>780-960</b>
<b>KG</b>							
200C	150 EX	1020	166	18	86	68	351-432



## PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
130 TX/130/97	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>39-42</b>	63-68	<b>180</b>	290
150 EX/150/112	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>42-45</b>	68-72	<b>180</b>	290
175 EX/175/131	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>44-48</b>	71-77	<b>180</b>	290

## FUEL FLOW DATA - 203 HORIZON COAST RUNNER WITH 130 TX / 130 / 97

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>4</b>	15
2500	<b>17</b>	27	<b>5</b>	19
3000	<b>21</b>	34	<b>6</b>	23
3500	<b>26</b>	42	<b>8</b>	30
4000	<b>31</b>	50	<b>10</b>	38
4500	<b>34</b>	55	<b>12</b>	45
5000	<b>36</b>	58	<b>13</b>	49
5500	<b>39</b>	63	<b>14</b>	53
WOT	<b>41</b>	66	<b>15</b>	57

## FUEL FLOW DATA - 203 HORIZON COAST RUNNER WITH 150 EX / 150 / 112

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>5</b>	19
2500	<b>18</b>	29	<b>6</b>	23
3000	<b>26</b>	42	<b>7</b>	27
3500	<b>31</b>	50	<b>9</b>	34
4000	<b>34</b>	55	<b>11</b>	42
4500	<b>39</b>	63	<b>13</b>	49
5000	<b>43</b>	70	<b>16</b>	61
WOT	<b>44</b>	71	<b>17</b>	64

- continued -



# 203 HORIZON COAST RUNNER

## FUEL FLOW DATA -203 HORIZON COAST RUNNER WITH 175 EX / 175 / 131

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	14	<b>5</b>	19
2500	<b>18</b>	29	<b>6</b>	23
3000	<b>26</b>	42	<b>7</b>	27
3500	<b>31</b>	50	<b>9</b>	35
4000	<b>34</b>	54	<b>11</b>	42
4500	<b>39</b>	62	<b>13</b>	50
5000	<b>44</b>	70	<b>16</b>	62
WOT	<b>47</b>	76	<b>18</b>	69

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## OPTIONS

---

- Bow anchor roller
  - Canvas (sides/aft)
  - Canvas, cockpit cover & forward
  - Canvas, mooring cover
  - Canvas, walk-through curtain
  - Cockpit carpet liner
  - Compass
  - Cushions, euro wrap, couch
  - Depth sounder
  - Dual batteries w/switch
  - Fish finder, Lowrance X-55
  - Fishing chairs, pedestal mount fore & aft
  - Fishwell, insulated w/bucket seat, port
  - Livewell, aerated
  - Lounger seat, stbd (exchange)
  - Prop, high alt./heavy load
  - Prop, stainless steel (exchange)
  - Seat, cushions (aft, fill-in)
  - Seat, cushions (bow fill-in)
  - Ski pylon
  - Table with mount
  - Transom washdwn
  - Walk-through door
  - Windshield wiper (std.)
- Trailer Options
- Brakes (delete)
  - Brakes (2nd axle)
  - Aluminum wheels (exchange)
  - Galvanized trailer
  - Spare tire & wheel (white aluminum galvanized)
  - Spare tire cover
  - Trailer (delete)
  - Trailer (tandem axle upgrade)

Export pkg. I, II and III available.





## PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0L 190/142	<b>14½ x 19</b>	36 x 48	AL	<b>42-45</b>	67-72	<b>140</b>	225
5.0L EFI/215/160	<b>14½ x 19</b>	36 x 48	AL	<b>45-48</b>	72-77	<b>140</b>	225
5.8L EFI/255/190	<b>14¼ x 21</b>	36 x 53	AL	<b>48-51</b>	77-82	<b>130</b>	210
5.8LHO EFI/270/201	<b>14¼ x 21</b>	36 x 53	AL	<b>50-53</b>	80-85	<b>130</b>	210

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

## FUEL FLOW DATA - 220 HORIZON WITH 5.0L /190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	14	<b>6</b>	23
2500	<b>24</b>	38	<b>7</b>	27
3000	<b>29</b>	46	<b>10</b>	38
3500	<b>34</b>	54	<b>13</b>	50
4000	<b>39</b>	62	<b>16</b>	62
WOT	<b>43</b>	69	<b>17</b>	65

## FUEL FLOW DATA - 220 HORIZON WITH 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>5</b>	19
2500	<b>26</b>	42	<b>7</b>	27
3000	<b>30</b>	48	<b>10</b>	38
3500	<b>35</b>	56	<b>13</b>	50
4000	<b>40</b>	64	<b>16</b>	62
4500	<b>44</b>	70	<b>18</b>	69
WOT	<b>47</b>	76	<b>19</b>	72

- continued -





## FUEL FLOW DATA - 220 HORIZON WITH 5.8L EFI / 255 / 190

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>11</b>	18	<b>6</b>	23
2500	<b>26</b>	42	<b>7</b>	27
3000	<b>32</b>	52	<b>11</b>	42
3500	<b>39</b>	63	<b>13</b>	49
4000	<b>45</b>	72	<b>16</b>	61
WOT	<b>49</b>	79	<b>20</b>	76

## FUEL FLOW DATA - 220 HORIZON WITH 5.8LHO EFI / 270 / 201

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>6</b>	23
2500	<b>25</b>	39	<b>8</b>	30
3000	<b>30</b>	47	<b>11</b>	42
3500	<b>38</b>	58	<b>13</b>	49
4000	<b>44</b>	68	<b>16</b>	61
4500	<b>49</b>	76	<b>19</b>	72
WOT	<b>51</b>	82	<b>22</b>	83

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

## OPTIONS

- Sun Sport (SS)
- Automatic bilge switch
- Canvas, bimini top
- Canvas, bimini w/ suntop delete
- Canvas, camper (bimini/sides/aft)
- Canvas, cockpit cover
- Canvas, cockpit cover & forward
- Canvas, forward
- Canvas, full (top/ side/ aft)
- Canvas, mooring cover
- Canvas, walk-through curtain
- Cockpit carpet for liner
- Compass
- Depth sounder
- Fiberglass liner
- Fish finder, Lowrance X-22A
- Gear ratio, high altitude (10)
- Hour meter
- Livewell, aft
- Prop, heavy load
- Prop, stainless (exchange)
- Seat, bucket (stbd.)
- Seat, bucket (both)
- Seating, bow fill-in cushions
- Ski pylon
- Table, cockpit
- Tilt steering wheel
- Walk-through door
- Windshield wiper (stbd.)
- Trailer Options:
  - Trailer (tandem axle upgrade)
  - Brakes (delete)
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheel (white) (aluminum/galvanized)
  - Spare tire cover
  - Delete trailer

Export Pkg. I , II and III Available.

# 240 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	<b>23'8"</b>	7.21 m
Beam:	<b>8'4"</b>	2.54 m
Keel to W/S Shelf:	<b>58"</b>	1.47 m
Total Height:	<b>74"</b>	1.88 m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>21°</b>	21°
Bridge Clearance:	<b>5'</b>	1.52 m
Cockpit Height (stern):	<b>31"</b>	78 cm
Cockpit Height (helm):	<b>37"</b>	93 cm
Freeboard (min.):	<b>36"</b>	90 cm
Draft (drive down):	<b>35"</b>	88 cm
Fuel:	<b>65 gal</b>	246 l
Passengers:	<b>11</b>	11
Maximum Capacity:	<b>2500 lbs</b>	1134 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.8L EFI/V8	<b>255</b>	190	<b>3750</b>	1700
5.8LHO EFI/V8	<b>270</b>	201	<b>3750</b>	1700
7.4L EFI/V8	<b>330</b>	246	<b>3890</b>	1760

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>240H</b>	<b>5.8L EFI</b>	<b>2690</b>	<b>1060</b>	<b>50</b>	<b>390</b>	<b>150</b>	<b>1120</b>
<b>KG</b>							
240H	5.8L EFI	1220	482	23	176	68	508



## PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.8L EFI/255/190	<b>14½ x 19</b>	37 x 48	AL	<b>45-48</b>	72-77	<b>180</b>	290
5.8LHO EFI/270/201	<b>14½ x 19</b>	37 x 48	AL	<b>47-50</b>	76-81	<b>170</b>	274
7.4L EFI/330/246	<b>14¼ x 21</b>	36 x 53	AL	<b>51-54</b>	82-86	<b>160</b>	256

## FUEL FLOW DATA - 240 HORIZON WITH 5.8L EFI / 255 / 190

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>6</b>	23
2500	<b>20</b>	32	<b>8</b>	30
3000	<b>29</b>	46	<b>9</b>	34
3500	<b>37</b>	60	<b>12</b>	45
4000	<b>43</b>	69	<b>16</b>	61
WOT	<b>47</b>	75	<b>20</b>	76

## FUEL FLOW DATA - 240 HORIZON WITH 5.8LHO EFI / 270 / 201

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>7</b>	27
2500	<b>20</b>	32	<b>8</b>	30
3000	<b>28</b>	45	<b>9</b>	34
3500	<b>34</b>	54	<b>13</b>	49
4000	<b>40</b>	64	<b>17</b>	65
4500	<b>45</b>	72	<b>20</b>	76
WOT	<b>49</b>	78	<b>23</b>	88

## FUEL FLOW DATA - 240 HORIZON WITH 7.4L EFI / 330 / 246

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>8</b>	30
2500	<b>21</b>	34	<b>9</b>	34
3000	<b>30</b>	48	<b>11</b>	42
3500	<b>35</b>	56	<b>15</b>	58
4000	<b>45</b>	72	<b>18</b>	68
4500	<b>49</b>	78	<b>21</b>	81
WOT	<b>52</b>	84	<b>25</b>	95

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## OPTIONS

---

- Auto bilge switch
  - Canvas, bimini top
  - Canvas, bimini top/sun top delete
  - Canvas, bow camper
  - Canvas, camper<sup>1</sup>
  - Canvas, cockpit cover
  - Canvas, cockpit cover & forward
  - Canvas, forward
  - Canvas, full<sup>2</sup>
  - Canvas, mooring cover
  - Canvas, walk-through curtain
  - Cockpit carpet for liner
  - Compass
  - Depth sounder
  - Fiberglass cockpit liner
  - Fire extinguisher, automatic
  - Fish finder, Lowrance X-22A
  - Flip-up engine box table (std. seating only)
  - Gear ratio, high altitude
  - Head, portable
  - Head, pumpout
  - Hour meter
  - Livewell aft
  - Prop, heavy load
  - Prop, stainless (exchange)
  - Seat, bucket stbd.
  - Seat, bucket (both)
  - Seating: bow fill-in cushions
  - Seating: Sun Sport (SS)
  - Table w/cockpit mount (SS seating only)
  - Tilt steering wheel
  - Trim tabs
  - Walk-through door
  - Windshield wiper, stbd.
- Trailer Options:
- Aluminum wheel
  - Galvanized trailer
  - Spare tire & wheel
  - Spare tire cover
  - Brakes tandem

<sup>1</sup>Bimini, sides, aft, connector

<sup>2</sup>Sun top, sides, aft, fwd.

Export Pkg I, II, and III available

# 214 CANDIA

SPECIFICATIONS*	US	METRIC
LOA / Transom to Bow:	<b>20'4"</b>	6.25 m
Beam:	<b>8'</b>	2.44 m
Keel to W/S Shelf:	<b>45"</b>	1.14 m
Total Height:	<b>60"</b>	1.52 m
Transom Angle:	<b>14°</b>	14°
Deadrise:	<b>19°</b>	19°
Bridge Clearance:	<b>3'11"</b>	1.19 m
Cockpit Height (stern):	<b>31"</b>	79 cm
Cockpit Height (helm):	<b>33"</b>	84 cm
Freeboard (min.):	<b>31"</b>	79 cm
Draft (drive down):	<b>28"</b>	71 cm
Fuel:	<b>35 gal.</b>	132 l
Passengers:	<b>13</b>	13
Maximum Capacity:	<b>2000 lbs.</b>	900 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.0L/V8	<b>190</b>	142	<b>3290</b>	1490
5.0L EFI/V8	<b>215</b>	160	<b>3360</b>	1520
5.8L EFI/V8	<b>255</b>	190	<b>3450</b>	1560

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trailer Wt.
<b>LBS</b>							
<b>214C</b>	<b>5.0L EFI</b>	<b>2180</b>	<b>950</b>	<b>50</b>	<b>190</b>	<b>150</b>	<b>1150</b>
<b>KG</b>							
214C	5.0L EFI	989	431	23	86	68	523



## PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0L/190/142	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	36 x 48	AL	<b>41-43</b>	66-69	<b>105</b>	169
5.0L EFI/200/160	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	36 x 48	AL	<b>43-45</b>	69-72	<b>105</b>	169
5.8L EFI/255/190	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>47-50</b>	76-81	<b>105</b>	169

## FUEL FLOW DATA - 214 CANDIA WITH 5.0L / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>7</b>	11	<b>6</b>	23
2500	<b>18</b>	29	<b>7</b>	26
3000	<b>25</b>	40	<b>10</b>	38
3500	<b>32</b>	52	<b>13</b>	49
4000	<b>37</b>	56	<b>15</b>	57
WOT	<b>41</b>	66	<b>17</b>	64

## FUEL FLOW DATA - 214 CANDIA WITH 5.0 EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>7</b>	11	<b>5</b>	19
2500	<b>19</b>	31	<b>7</b>	26
3000	<b>26</b>	42	<b>10</b>	38
3500	<b>32</b>	52	<b>14</b>	53
4000	<b>39</b>	61	<b>16</b>	61
WOT	<b>44</b>	77	<b>18</b>	68

## FUEL FLOW DATA - 214 CANDIA WITH 5.8L EFI / 255 / 190

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>6</b>	23
2500	<b>20</b>	32	<b>7</b>	27
3000	<b>30</b>	48	<b>11</b>	42
3500	<b>39</b>	63	<b>13</b>	49
4000	<b>45</b>	72	<b>17</b>	64
WOT	<b>48</b>	77	<b>20</b>	76

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## OPTIONS

---

- Auto bilge switch
- Canvas, mooring cover
- Cockpit sink  
(7 gal / 271l)
- Depth sounder
- Fire extintuisher,  
automatic
- Fishing platform w/seat
- Gear ratio, high altitude
- Grey water system  
(7 gal / 271 l)
- Hour meter
- Livewell, aft
- Porta-potti w/enclosure
- Prop, heavy load
- Prop, stainless  
(exchange)
- Seating: bow fill-in  
cushions
- Table w/2 floor mounts
- Tilt steering wheel
- Windshield
- Trailer Options:
  - Trailer (std. axle)
  - Brakes delete
  - Brakes (2 axle)
  - Aluminum wheels
  - Galvanized trailer
  - Spare tire & wheel,  
(white)  
(aluminum/galvanized)
  - Spare tire cover

Export Pkg. I , II and III available.





# 195 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	<b>19'0"</b>	5.79 m
Beam:	<b>7'3"</b>	2.21 m
Keel to W/S Shelf:	<b>54"</b>	1.37 m
Total Height:	<b>67"</b>	1.70 m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>18°</b>	18°
Bridge Clearance:	<b>4'7"</b>	1.40 m
Cockpit Height (stern):	<b>29"</b>	74 cm
Cockpit Height (helm):	<b>33"</b>	84 cm
Freeboard (min.):	<b>29"</b>	74 cm
Draft (drive down):	<b>30"</b>	76 cm
Fuel:	<b>28 gal</b>	100 l
Passengers:	<b>8</b>	8
Maximum Capacity:	<b>1300 lbs</b>	590 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
4.3L/V6 (10)	<b>160</b>	119	<b>2650</b>	1200
5.0L/V8 (10)	<b>190</b>	142	<b>2750</b>	1250
5.0L EFI/V8 (10)	<b>215</b>	160	<b>2790</b>	1270

\*Johnson® or Evinrude® includes power tilt, trim & VRO™.

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>195S 10</b>	<b>5.0L</b>	<b>1820</b>	<b>930</b>	<b>50</b>	<b>210</b>	<b>150</b>	<b>850-990</b>
<b>KG</b>							
195S 10	5.0L	825	422	23	95	68	383-446



## PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
4.3L/160/119	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>41-44</b>	66-71	<b>110</b>	177
5.0L/190/142	<b>14<sup>1</sup>/<sub>2</sub> x 21</b>	36 x 53	AL	<b>45-48</b>	72-78	<b>110</b>	177
5.0L EFI/215/160	<b>14<sup>1</sup>/<sub>4</sub> x 21</b>	36 x 53	AL	<b>48-51</b>	78-83	<b>110</b>	177

## FUEL FLOW DATA - 195 SUNDOWNER WITH 4.3L / 160 / 119

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>4</b>	15
2500	<b>20</b>	32	<b>5</b>	19
3000	<b>25</b>	40	<b>7</b>	27
3500	<b>32</b>	52	<b>11</b>	42
4000	<b>37</b>	60	<b>13</b>	49
WOT	<b>42</b>	68	<b>15</b>	57

## FUEL FLOW DATA - 195 SUNDOWNER WITH 5.0L / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	14	<b>5</b>	19
2500	<b>25</b>	40	<b>6</b>	23
3000	<b>30</b>	48	<b>9</b>	35
3500	<b>35</b>	56	<b>11</b>	43
4000	<b>41</b>	66	<b>13</b>	50
WOT	<b>46</b>	74	<b>17</b>	66

## FUEL FLOW DATA - 195 SUNDOWNER WITH 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>5</b>	19
2500	<b>26</b>	42	<b>6</b>	23
3000	<b>31</b>	50	<b>8</b>	31
3500	<b>36</b>	58	<b>10</b>	38
4000	<b>41</b>	66	<b>15</b>	58
4500	<b>46</b>	74	<b>17</b>	66
WOT	<b>49</b>	79	<b>18</b>	70

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## OPTIONS

---

- SS (Sun Sport) Interior
  - Bow anchor roller
  - Bow rail, walk thru
  - Canvas, bimini top
  - Canvas, bimini top w/std. top delete
  - Canvas, camper (bimini top/sides/aft)
  - Canvas, cockpit cover
  - Canvas, full (std. top/sides/aft)
  - Canvas, mooring cover
  - Compass
  - Depth sounder
  - Fiberglass liner (requires tandem trailer)
  - Cockpit carpet for liner
  - Fire extinguisher, automatic
  - Fish finder, Lowrance X-22A
  - Gear ratio, high altitude
  - Hatch screen
  - Head, porti
  - Head, pumpout
  - Hour meter
  - Livewell, aft
  - Prop, heavy load
  - Prop, stainless (exchange)
  - Seat, bucket (stbd.)
  - Seats, bucket (both)
  - Steering, tilt wheel
  - Table with mount
  - Windshield, wiper (stbd. only)
- Trailer Options:
- Trailer (tandem axle)
  - Brakes (delete)
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheel (white) (aluminum/galvanized)
  - Spare tire cover
  - Delete trailer

Export pkg. I, II and III available.

# 205 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	<b>20'2"</b>	6.15 m
Beam:	<b>7'4"</b>	2.24 m
Keel to W/S Shelf:	<b>56"</b>	1.42 m
Total Height:	<b>70"</b>	1.78 m
Transom Angle:	<b>15°</b>	15°
Transom Height:	<b>25"</b>	64 cm
Deadrise:	<b>19°</b>	19°
Bridge Clearance:	<b>4'9"</b>	1.45 m
Cockpit Height (stern):	<b>30"</b>	76 cm
Cockpit Height (helm):	<b>35"</b>	89 cm
Freeboard (min.):	<b>(IO) 32" (OB) 34"</b>	(IO) 81cm (OB) 86cm
Draft (drive down):	<b>(IO) 30" (OB) 27"</b>	(IO) 76 cm (OB) 69 cm
Fuel:	<b>35 gal</b>	135 l
Passengers:	<b>9</b>	9
Maximum Capacity:	<b>(IO) 1400 lbs (OB) 2100lbs</b>	(IO) 635kg (OB) 953 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft HP	Power KW	Boat & Engine Weights LBS	KG
130 TX/V4 (OB)*	<b>130</b>	97	<b>2650</b>	1205
150 EX/V6 (OB)*	<b>150</b>	112	<b>2640</b>	1200
175 EX/V6 (OB)*	<b>175</b>	131	<b>2640</b>	1200
4.3L/V6 (IO)	<b>160</b>	119	<b>3120</b>	1410
5.0L/V8 (IO)	<b>190</b>	142	<b>3220</b>	1460
5.0L EFI/V8 (IO)	<b>215</b>	160	<b>3260</b>	1480

\*Johnson® or Evinrude® includes power tilt, trim & VRO™.

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>205S IO</b>	<b>5.0L</b>	<b>2310</b>	<b>930</b>	<b>50</b>	<b>210</b>	<b>150</b>	<b>850-990</b>
<b>205S OB</b>	<b>150 EX</b>	<b>2260</b>	<b>360</b>	<b>50</b>	<b>210</b>	<b>150</b>	<b>775-950</b>
<b>KG</b>							
205S IO	5.0L	1048	422	23	95	68	383-446
205S OB	150 EX	1025	168	23	95	68	349-428



# PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
130 TX/130/97	<b>14½ x 19</b>	37 x 48	AL	<b>39-42</b>	63-68	<b>110</b>	177
150 EX/150/112	<b>14½ x 19</b>	37 x 48	AL	<b>42-45</b>	68-72	<b>110</b>	177
175 EX/175/131	<b>14½ x 19</b>	37 x 48	AL	<b>44-48</b>	71-78	<b>110</b>	177
4.3L/160/119	<b>15 x 17</b>	38 x 43	AL	<b>39-42</b>	63-68	<b>110</b>	177
5.0L/190/142	<b>14½ x 19</b>	37 x 48	AL	<b>43-46</b>	69-74	<b>110</b>	177
5.0L EFI/215/160	<b>14½ x 19</b>	37 x 48	AL	<b>45-48</b>	72-78	<b>110</b>	177

## FUEL FLOW DATA - 205 SUNDOWNER WITH 130 TX / 130 / 97

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>4</b>	15
2500	<b>17</b>	27	<b>5</b>	19
3000	<b>21</b>	34	<b>6</b>	23
3500	<b>26</b>	42	<b>8</b>	30
4000	<b>31</b>	50	<b>10</b>	38
4500	<b>34</b>	55	<b>11</b>	42
5000	<b>36</b>	58	<b>13</b>	49
5500	<b>39</b>	63	<b>14</b>	53
WOT	<b>42</b>	68	<b>15</b>	57

## FUEL FLOW DATA - 205 SUNDOWNER WITH 150 EX / 150 / 112

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>5</b>	19
2500	<b>18</b>	29	<b>6</b>	23
3000	<b>26</b>	42	<b>7</b>	27
3500	<b>31</b>	50	<b>9</b>	34
4000	<b>34</b>	55	<b>11</b>	42
4500	<b>38</b>	61	<b>13</b>	49
5000	<b>42</b>	68	<b>16</b>	61
WOT	<b>44</b>	71	<b>17</b>	64

- continued -



### FUEL FLOW DATA - 205 SUNDOWNER WITH 175 EX / 175 / 131

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	14	<b>5</b>	19
2500	<b>18</b>	29	<b>6</b>	23
3000	<b>26</b>	42	<b>7</b>	27
3500	<b>31</b>	50	<b>9</b>	35
4000	<b>34</b>	54	<b>11</b>	42
4500	<b>39</b>	62	<b>13</b>	50
5000	<b>43</b>	69	<b>16</b>	62
WOT	<b>46</b>	74	<b>18</b>	69

### FUEL FLOW DATA - 205 SUNDOWNER WITH 4.3L / 160 / 119

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>4</b>	15
2500	<b>20</b>	32	<b>5</b>	19
3000	<b>25</b>	40	<b>7</b>	27
3500	<b>31</b>	50	<b>11</b>	42
4000	<b>36</b>	58	<b>13</b>	49
WOT	<b>40</b>	64	<b>15</b>	57

### FUEL FLOW DATA - 205 SUNDOWNER WITH 5.0L / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	14	<b>5</b>	19
2500	<b>25</b>	40	<b>6</b>	23
3000	<b>30</b>	48	<b>9</b>	35
3500	<b>37</b>	59	<b>12</b>	46
4000	<b>41</b>	66	<b>15</b>	58
WOT	<b>44</b>	70	<b>17</b>	65

### FUEL FLOW DATA - 205 SUNDOWNER WITH 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>5</b>	19
2500	<b>26</b>	42	<b>6</b>	23
3000	<b>31</b>	50	<b>8</b>	31
3500	<b>36</b>	58	<b>10</b>	38
4000	<b>41</b>	66	<b>15</b>	58
4500	<b>45</b>	72	<b>18</b>	69
WOT	<b>47</b>	75	<b>19</b>	72

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## OPTIONS

- SS (Sun Sport) Interior (IO only)
- Bow anchor roller
- Bow rail, walk thru
- Canvas, bimini top
- Canvas, bimini top w/std. top delete
- Canvas, camper (bimini top/sides/aft)
- Canvas, cockpit cover
- Canvas, full (std. top/sides/aft)
- Canvas, mooring cover
- Cockpit carpet for liner
- Compass
- Cushions, eurowrap couch fill-in (OB only)
- Depth sounder
- Fiberglass liner (requires tandem trailer)
- Fire extinguisher, automatic (IO only)
- Fire extinguisher,
- Fish finder, Lowrance X-22A
- Gear ratio, high altitude
- Hatch screen
- Head, porti
- Head, pumpout
- Hour meter (IO only)
- Livewell, aft (IO only)
- Prop, heavy load
- Prop, stainless (exchange)
- Seat, bucket (stbd.)
- Seats, bucket (both)
- Ski pylon (OB only)
- Steering, tilt wheel (IO only)
- Table with mount(s)
- Transom washdown
- Windshield, wiper (stbd. only)
- Trailer Options:
  - Trailer (tandem axle)
  - Brakes (delete)
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheel (white) (aluminum/galvanized)
  - Spare tire cover
  - Delete trailer

Export pkg. I, II and III available.



# 225 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	<b>21'6"</b>	6.55 m
Beam:	<b>7'9"</b>	2.36 m
Keel to W/S Shelf:	<b>58"</b>	1.47 m
Total Height:	<b>73"</b>	1.85 m
Transom Angle:	<b>14°</b>	14°
Deadrise:	<b>20°</b>	20°
Bridge Clearance:	<b>4'11"</b>	1.50 m
Cockpit Height (stern):	<b>29"</b>	74 cm
Cockpit Height (helm):	<b>38"</b>	97 cm
Freeboard (min.):	<b>38"</b>	97 cm
Draft (drive down):	<b>35"</b>	89 cm
Fuel:	<b>50 gal</b>	190 l
Passengers:	<b>10</b>	10
Maximum Capacity:	<b>1800</b>	816 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.0L/V8	<b>190</b>	142	<b>3410</b>	1550
5.0L EFI/V8	<b>215</b>	160	<b>3450</b>	1560
5.8L EFI/V8	<b>255</b>	190	<b>3540</b>	1610
5.8LHO EFI/V8	<b>270</b>	201	<b>3540</b>	1610

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>225S</b>	<b>5.0L EFI</b>	<b>2500</b>	<b>950</b>	<b>50</b>	<b>300</b>	<b>150</b>	<b>1075</b>
<b>KG</b>							
225S	5.0L EFI	1134	431	23	136	68	488





## PERFORMANCE

Power HP/KW	Propeller Dia x Pitch		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0L 190/142	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>41-44</b>	66-71	<b>135</b>	217
5.0L EFI/215/160	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>43-46</b>	69-74	<b>135</b>	217
5.8L EFI/255/190	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>46-49</b>	74-79	<b>130</b>	210
5.8LHO EFI/270/201	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>48-51</b>	77-82	<b>130</b>	210

## FUEL FLOW DATA - 225 SUNDOWNER WITH 5.0L / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>6</b>	23
2500	<b>24</b>	39	<b>7</b>	27
3000	<b>28</b>	45	<b>10</b>	38
3500	<b>33</b>	53	<b>13</b>	49
4000	<b>38</b>	61	<b>16</b>	61
WOT	<b>42</b>	68	<b>17</b>	64

## FUEL FLOW DATA - 225 SUNDOWNER WITH 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>5</b>	19
2500	<b>26</b>	42	<b>7</b>	27
3000	<b>29</b>	47	<b>10</b>	38
3500	<b>34</b>	55	<b>13</b>	49
4000	<b>39</b>	63	<b>16</b>	61
WOT	<b>44</b>	71	<b>18</b>	68

## FUEL FLOW DATA - 225 SUNDOWNER WITH 5.8L EFI / 255 / 190

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>11</b>	17	<b>6</b>	23
2500	<b>26</b>	42	<b>7</b>	27
3000	<b>31</b>	50	<b>10</b>	38
3500	<b>38</b>	61	<b>13</b>	49
4000	<b>44</b>	71	<b>17</b>	64
WOT	<b>48</b>	77	<b>20</b>	76

- continued -



# 225 SUNDOWNER

## FUEL FLOW DATA - 225 SUNDOWNER WITH 5.8LHO EFI / 270 / 201

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>6</b>	23
2500	<b>24</b>	39	<b>8</b>	30
3000	<b>28</b>	45	<b>11</b>	42
3500	<b>35</b>	56	<b>14</b>	53
4000	<b>41</b>	66	<b>16</b>	61
4500	<b>46</b>	74	<b>19</b>	72
WOT	<b>50</b>	81	<b>22</b>	83

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## OPTIONS

- SS (Sun Sport) Interior
  - Bow anchor roller
  - Bow rail, walk-thru
  - Canvas, bimini top
  - Canvas, bimini top w/std. top delete
  - Canvas, camper (bimini top/sides/aft)
  - Canvas, cockpit cover
  - Canvas, full (std. top/side/aft)
  - Canvas, mooring cover
  - Cockpit carpet for liner
  - Compass
  - Depth sounder
  - Fiberglass liner
  - Fire extinguisher, automatic
  - Fish finder, Lowrance X-22A
  - Gear ratio, high altitude
  - Hatch screen
  - Head, porti
  - Head, pumpout
  - Hour meter
  - Livewell, aft
  - Prop, heavy load
  - Prop, stainless (exchange, each)
  - Seat, bucket (stbd.)
  - Seat, bucket (both)
  - Steering, tilt wheel
  - Table with mount(s)
  - Transom washdown
  - Windshield, wiper (stbd. only)
- Trailer Options:
- Trailer (tandem axle)
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheel (white) (aluminum/galvanized)
  - Spare tire cover
  - Delete trailer

Export pkg. I, II and III available.



# 245 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	<b>23'8"</b>	7.21 m
Beam:	<b>8'4"</b>	2.54 m
Keel to W/S Shelf:	<b>64"</b>	1.63 m
Total Height:	<b>80"</b>	2.03 m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>21°</b>	21°
Bridge Clearance:	<b>5'6"</b>	1.68 m
Cockpit Height (stern):	<b>35"</b>	89 cm
Cockpit Height (helm):	<b>38"</b>	97 cm
Freeboard (min.):	<b>33"</b>	84 cm
Draft (drive down):	<b>37"</b>	94 cm
Fuel:	<b>65 gal</b>	246 l
Passengers:	<b>11</b>	11
Maximum Capacity:	<b>2500 lbs</b>	1134 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.8L EFI/V8	<b>255</b>	190	<b>3980</b>	1800
5.8LHO EFI/V8	<b>270</b>	201	<b>3980</b>	1800
7.4L EFI/V8	<b>330</b>	246	<b>4140</b>	1880

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>245S</b>	<b>5.8L EFI</b>	<b>2940</b>	<b>1040</b>	<b>50</b>	<b>390</b>	<b>250</b>	<b>1125</b>
<b>KG</b>							
245S	5.8L EFI	1335	472	23	176	113	510



## Performance

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.8L EFI/255/190	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>43-46</b>	69-74	<b>160</b>	256
5.8LHO EFI/270/201	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>45-48</b>	72-77	<b>150</b>	242
7.4L EFI/ 330/246	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>49-52</b>	79-84	<b>150</b>	242

## FUEL FLOW DATA - 245 SUNDOWNER WITH 5.8L EFI / 255 / 190

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>6</b>	23
2500	<b>20</b>	32	<b>8</b>	30
3000	<b>28</b>	45	<b>11</b>	42
3500	<b>36</b>	58	<b>13</b>	49
4000	<b>41</b>	68	<b>16</b>	61
WOT	<b>45</b>	74	<b>20</b>	76

## FUEL FLOW DATA - 245 SUNDOWNER WITH 5.8LHO EFI / 270 / 201

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>7</b>	27
2500	<b>20</b>	32	<b>8</b>	30
3000	<b>27</b>	43	<b>10</b>	38
3500	<b>33</b>	53	<b>13</b>	49
4000	<b>38</b>	63	<b>17</b>	64
4500	<b>43</b>	66	<b>20</b>	76
WOT	<b>47</b>	72	<b>23</b>	87

## FUEL FLOW DATA - 245 SUNDOWNER WITH 7.4L EFI/330/246

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>8</b>	30
2500	<b>21</b>	34	<b>9</b>	34
3000	<b>29</b>	47	<b>12</b>	45
3500	<b>34</b>	55	<b>15</b>	57
4000	<b>44</b>	71	<b>18</b>	68
4500	<b>48</b>	77	<b>21</b>	80
WOT	<b>50</b>	81	<b>25</b>	95

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



## OPTIONS

---

- Alcohol stove, burner
  - SS (Sun Sport) interior
  - Batteries, dual w/switch
  - Bow anchor roller
  - Bow rail, walk-thru
  - Canvas, bimini top
  - Canvas, bimini top w/std. top delete
  - Canvas, camper (bimini top/sides/aft)
  - Canvas, cockpit cover
  - Canvas, full (std. top/sides/aft)
  - Canvas, mooring cover
  - C/O monitor
  - Cockpit galley I (includes table)
  - Cockpit galley II (includes table)
  - Cockpit carpet for liner
  - Compass
  - Depth sounder
  - Fiberglass liner
  - Fish finder, Lowrance X-22A
  - Fire extinguisher, automatic
  - Gear ratio, high altitude
  - Grey water
  - Hatch screen
  - Head, pumpout
  - Hour meter
  - Livewell, aft
  - Prop, heavy load
  - Prop, stainless (exchange)
  - Seat, bucket (stbd.)
  - Seat, bucket (both)
  - Table with mount(s)
  - Tilt steering wheel
  - Transom washdown
  - Trim tabs
  - Windshield, wiper (stbd. only)
- Trailer Options:
- Trailer (tandem axle)
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheel, (white) (aluminum/galvanized)
  - Spare tire cover
  - Delete trailer

Export Pkg. I, II, III available.

# 238 VISTA

SPECIFICATIONS*	US	METRIC
LOA	<b>23'4"</b>	7.11 m
Beam:	<b>8'0"</b>	2.44 m
Keel to W/S Shelf:	<b>6'1"</b>	1.85 m
Total Height:	<b>7'8"</b>	2.34 m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>16°</b>	16°
Bridge Clearance:	<b>6'4"</b>	1.93 m
Cockpit Height (stern):	<b>22"</b>	56 cm
Cockpit Height (helm):	<b>27" / 34"</b>	69 cm / 86 cm
Headroom (max.):	<b>5'10"</b>	1.78 m
Freeboard (min.):	<b>47"</b>	1.19 m
Draft (drive down):	<b>36"</b>	91 cm
Fuel:	<b>50 gal</b>	190 l
Potable Water:	<b>15 gal</b>	57 l
Passengers:	<b>10</b>	10
Maximum Capacity:	<b>2300 lbs</b>	1040 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.0L V8	<b>190</b>	142	<b>4240</b>	1920
5.0L EFI/V8	<b>215</b>	160	<b>4280</b>	1940
5.8L EFI/V8	<b>255</b>	190	<b>4370</b>	1980

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>238V</b>	<b>5.0 L EFI</b>	<b>3310</b>	<b>930</b>	<b>50</b>	<b>300</b>	<b>250</b>	<b>1590</b>
<b>KG</b>							
238V	5.0 L EFI	1500	422	23	136	113	721



## PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0 L/190/142	<b>15 x 17</b>	38 x 43	AL	<b>36-40</b>	58-64	<b>120</b>	193
5.0 L EFI/215/160	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>39-43</b>	63-69	<b>120</b>	193
5.8 L EFI/255/190	<b>14<sup>1</sup>/<sub>2</sub> x 19</b>	37 x 48	AL	<b>41-45</b>	66-72	<b>120</b>	193

## FUEL FLOW DATA - 238 VISTA WITH 5.0L / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>4</b>	15
2500	<b>10</b>	16	<b>7</b>	26
3000	<b>21</b>	34	<b>8</b>	30
3500	<b>29</b>	47	<b>11</b>	41
4000	<b>35</b>	56	<b>13</b>	49
WOT	<b>39</b>	63	<b>16</b>	61

## FUEL FLOW DATA - 238 VISTA WITH 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>5</b>	19
2500	<b>11</b>	18	<b>7</b>	27
3000	<b>22</b>	35	<b>8</b>	30
3500	<b>29</b>	47	<b>10</b>	38
4000	<b>34</b>	55	<b>13</b>	49
4500	<b>39</b>	63	<b>16</b>	61
WOT	<b>42</b>	68	<b>18</b>	68

## FUEL FLOW DATA - 238 VISTA WITH 5.8L EFI / 255 / 190

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>5</b>	19
2500	<b>12</b>	19	<b>7</b>	27
3000	<b>23</b>	37	<b>9</b>	34
3500	<b>31</b>	50	<b>12</b>	45
4000	<b>37</b>	60	<b>15</b>	57
WOT	<b>44</b>	71	<b>20</b>	76

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.





## OPTIONS

- Alcohol stove, 1 burner
  - Batteries, dual w/switch
  - Bow roller
  - Canvas, cockpit cover
  - Cockpit carpet
  - Cockpit storage door
  - Compass
  - C/O monitor
  - Cushion, fill-in, aft seating
  - Deck sunpad
  - Dockside power
  - Fire extinguisher, automatic
  - Flush out kit
  - Gear ratio, high altitude
  - Grey water system
  - Hatch screens
  - Head, porcelain
  - Head, porcelain with overboard discharge (export)
  - Head, pumpout
  - Hour meter
  - Light, flood remote
  - Microwave
  - Prop, heavy load
  - Prop SST (exchange)
  - Radio, VHF
  - Refrigerator
  - Seat, helm fwd/aft facing
  - Snap-in Sunbrella cabin runner
  - Steering, tilt wheel
  - Stereo and speaker upgrade
  - Table with cockpit mount
  - Transom washdown
  - Trim tabs
  - Two-Tone gel coat
  - Water heater
  - Windshield wiper, stbd.
- Trailer Options:
- Trailer (tandem axle)
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheels (white) (aluminum/galvanized)
  - Spare tire cover

Export pkg. I, II and III available



# 258 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	<b>25'4"</b>	7.72 m
Beam:	<b>8'6"</b>	2.59 m
Keel to W/S Shelf:	<b>6'4"</b>	1.93 m
Total Height:	<b>7'11"</b>	2.41 m
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>17°</b>	17°
Bridge Clearance:	<b>6'8"</b>	2.03 m
Cockpit Height (stern):	<b>24"</b>	61 cm
Cockpit Height (helm):	<b>27" / 37"</b>	69 cm / 94 cm
Headroom (max):	<b>6'</b>	1.83 m
Freeboard (min.):	<b>48"</b>	1.22 m
Draft (drives down):	<b>39"</b>	99 cm
Fuel:	<b>75 gal</b>	284 l
Potable Water:	<b>20 gal</b>	76 l
Passengers:	<b>10</b>	10
Maximum Capacity:	<b>2460 lbs.</b>	1120 kg

\*Dimensional diagram is located on page 100.

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
5.0L EFI/V8	<b>215</b>	160	<b>5120</b>	2320
5.8L EFI/V8	<b>255</b>	190	<b>5160</b>	2340
7.4L EFI/V8	<b>330</b>	246	<b>5280</b>	2340

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
<b>LBS</b>							
<b>238V</b>	<b>5.8L EFI</b>	<b>4100</b>	<b>1060</b>	<b>60</b>	<b>450</b>	<b>350</b>	<b>1760</b>
<b>KG</b>							
238V	5.8L EFI	1860	480	60	27	158	792



## PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
5.0L EFI/215/160	<b>15 x 17</b>	38 x 43	AL	<b>33-35</b>	53-56	<b>130</b>	209
5.8L EFI/255/190	<b>15 x 17</b>	38 x 43	AL	<b>37-40</b>	56-61	<b>130</b>	209
7.4L EFI/330/246	<b>15 x 17</b>	38 x 43	AL	<b>42-45</b>	68-72	<b>130</b>	209

### FUEL FLOW DATA - 258 VISTA WITH 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>3</b>	11
2500	<b>9</b>	15	<b>6</b>	23
3000	<b>13</b>	21	<b>7</b>	27
3500	<b>24</b>	39	<b>11</b>	34
4000	<b>30</b>	48	<b>15</b>	57
WOT	<b>34</b>	55	<b>18</b>	68

### FUEL FLOW DATA - 258 VISTA WITH 5.8L EFI / 255 / 190

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>8</b>	13	<b>6</b>	19
2500	<b>10</b>	16	<b>8</b>	30
3000	<b>24</b>	39	<b>11</b>	42
3500	<b>29</b>	47	<b>14</b>	53
4000	<b>35</b>	56	<b>18</b>	68
WOT	<b>38</b>	61	<b>21</b>	80

### FUEL FLOW DATA - 258 VISTA WITH 7.4L EFI / 330 / 246

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	15	<b>8</b>	30
2500	<b>12</b>	19	<b>10</b>	38
3000	<b>27</b>	43	<b>13</b>	49
3500	<b>32</b>	51	<b>16</b>	61
4000	<b>37</b>	60	<b>20</b>	76
WOT	<b>44</b>	71	<b>24</b>	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

- continued -



## OPTIONS

---

- Alcohol stove
  - Batteries, dual w/switch
  - Bow anchor roller
  - Canvas, cockpit cover
  - Cockpit carpet
  - Cockpit storage doors
  - Compass
  - C/O monitor
  - Deck sunpad
  - Fire extinguisher, automatic
  - Fill-in aft seating
  - Flush out kit
  - Gear ratio, high altitude
  - Grey water system
  - Hatch screens
  - Head, porcelain
  - Head, porcelain with overboard discharge (export)
  - Head, pumpout
  - Helm seat: fwd./aft facing
  - Hour meter
  - Light, flood remote
  - Microwave
  - Prop, heavy load
  - Prop SST exchange
  - Radio, VHF
  - Snap-in Sunbrella cabin runner
  - Steering, tilt wheel
  - Stereo and speaker upgrade
  - Table with cockpit mount
  - Transom washdown kit
  - Trim tabs
  - Two tone gel coat
  - Windshield wiper, stbd.
- Trailer Options:
- Trailer (tandem axle)
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheels (white) (aluminum/galvanized)
  - Spare tire cover

Export pkg. I, II and III available

# 278 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	<b>27'2"</b>	8.28 m
Beam:	<b>9'4"</b>	2.84 m
Keel to W/S Shelf:	<b>7'6"</b>	2.29 m
Total Height:	<b>9'1" / 10'8" w/arch</b>	2.77 m / 3.25 m w/arch
Transom Angle:	<b>15°</b>	15°
Deadrise:	<b>17°</b>	17°
Bridge Clearance:	<b>7'3" / 8'6" w/arch</b>	2.21 / 2.59 m w/arch
Cockpit Height (stern):	<b>28"</b>	71 cm
Cockpit Height (helm):	<b>32"</b>	81 cm
Headroom (max):	<b>6'1"</b>	1.86 m
Freeboard (min.):	<b>45"</b>	1.14 m
Draft (drive down):	<b>39"</b>	99 cm
Fuel:	<b>110 gal</b>	417 l
Potable Water:	<b>29 gal</b>	110 l
Passengers:	<b>10</b>	10
Maximum Capacity:	<b>Y</b>	Y

\*Dimensional diagram is located on page 100.

Y = Yacht certified

## POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
7.4L EFI/V8	<b>330</b>	246	<b>6650</b>	3020
Twin 5.0L V8	<b>190 EA</b>	141 EA	<b>7380</b>	3350
Twin 5.0L EFI/V8	<b>215 EA</b>	160 EA	<b>7480</b>	3390

## RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
<b>LBS</b>						
<b>278</b>	<b>Twin 5.0L EFI</b>	<b>5540</b>	<b>1940</b>	<b>100</b>	<b>660</b>	<b>500</b>
<b>KG</b>						
278	Twin 5.0L EFI	2510	880	45	300	227

## PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
7.4L EFI/330/246	<b>16½ x 17</b>	41 x 43	AL	<b>36-39</b>	58-63	<b>170</b>	274
Twin 5.0L/190/142	<b>14½ x 19</b>	37 x 48	SSTII	<b>43-45</b>	69-72	<b>150</b>	241
Twin 5.0L EFI/215/160	<b>14½ x 19</b>	37 x 48	SSTII	<b>45-49</b>	72-74	<b>150</b>	241



### FUEL FLOW DATA - 278 VISTA WITH 7.4L EFI / 330 / 246

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>9</b>	14	<b>7</b>	27
2500	<b>13</b>	21	<b>11</b>	42
3000	<b>23</b>	37	<b>14</b>	53
3500	<b>28</b>	45	<b>16</b>	61
4000	<b>34</b>	55	<b>19</b>	72
WOT	<b>37</b>	60	<b>24</b>	91

### FUEL FLOW DATA - 278 VISTA WITH TWIN 5.0L / 190 / 142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>11</b>	42
2500	<b>18</b>	29	<b>16</b>	61
3000	<b>30</b>	48	<b>20</b>	76
3500	<b>35</b>	56	<b>24</b>	91
4000	<b>39</b>	63	<b>30</b>	114
WOT	<b>44</b>	71	<b>34</b>	129

### FUEL FLOW DATA - 278 VISTA WITH TWIN 5.0L EFI / 215 / 160

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	<b>10</b>	16	<b>10</b>	38
2500	<b>18</b>	29	<b>15</b>	57
3000	<b>31</b>	50	<b>20</b>	76
3500	<b>37</b>	60	<b>24</b>	91
4000	<b>42</b>	68	<b>32</b>	121
WOT	<b>47</b>	76	<b>38</b>	144

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

- continued -



## OPTIONS

- Air conditioning & heating, 7000 BTU
  - Alcohol stove, 1 burner
  - Canvas, cockpit cover
  - Cockpit carpet
  - Compass
  - C/O monitor
  - Deck sunpad
  - Fire extinguisher, automatic
  - Flush out kit (each)
  - Gas vapor detector
  - Generator, 4 kw
  - Grey water system
  - Hatches, 2 1/2" / 6 cm round
  - Hatch screens
  - Head, porcelain
  - Head, porcelain with overboard discharge (export)
  - Hour meter (each)
  - Light, flood remote
  - Microwave
  - Navigation pkg. (GPS & VHF radio)
  - Radar arch
  - Snap-in Sunbrella cabin runner
  - Steering, tilt wheel
  - Stereo and speaker upgrade
  - Stern wrap seat with fill-in cushions
  - Table with cockpit mount
  - Transom washdown kit
  - Trim tabs
  - Two tone gel coat
  - Windlass, rope & chain (req. bow roller)
  - Windshield wiper, both
- Trailer Options:
- Trailer (tri-axle)
  - Brakes (2nd axle)
  - Aluminum wheels (each)
  - Galvanized trailer
  - Spare tire & wheels (white) (aluminum/galvanized)
  - Spare tire cover

Export pkg. I, II and III available



# FLING TRAILER SPECIFICATIONS

	FLING (Model# D01411A)	
	US	METRIC
Length with Tongue	<b>15'9"</b>	4.76 m
Length without Tongue	<b>NA</b>	NA
Width	<b>79"</b>	2.01 m
Empty Weight	<b>400 lbs</b>	180 kg
Carrying Capacity	<b>1,400 lbs</b>	630 kg
GVWR (Gross Vehicle Weight Rating)	<b>1,800 lbs</b>	810 kg
GAWR (Gross Axle Wt. Rat.)	<b>1,800 lbs</b>	810 kg
Height (Top of Windshield, with Boat on Trailer)	<b>52"</b>	1.32 m
Tire Size	<b>5.30-12</b>	5.30 -12
Load Range	<b>C</b>	C
Axle	<b>Single</b>	Single
Hub	<b>5 Lug 4<sup>1</sup>/<sub>2</sub>" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>500 lbs</b>	225 kg
Winch	<b>600 lbs</b>	270 kg
Ball Size	<b>2"</b>	5 cm

NA = Not applicable





# FREEDOM TRAILER SPECIFICATIONS

	FREEDOM (Model# D815)	
	US	METRIC
Length with Tongue	<b>19'2"</b>	5.82 m
Length without Tongue	<b>15'7"</b>	4.73 m
Width	<b>96"</b>	2.44 m
Empty Weight	<b>585 lbs</b>	263 kg
Carrying Capacity	<b>2,835 lbs</b>	1,276 kg
GVWR (Gross Vehicle Weight Rating)	<b>3,420 lbs</b>	1,539 kg
GAWR (Gross Axle Wt. Rat.)	<b>3,420 lbs</b>	1,539 kg
Height (Top of Windshield, with Boat on Trailer)	<b>70"</b>	1.77 m
Tire Size	<b>F78-14ST</b>	F78-14ST
Load Range	<b>C</b>	C
Axle	<b>Single</b>	Single
Hub	<b>5 Lug 4 1/2" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,400 lbs</b>	630 kg
Ball Size	<b>2"</b>	5 cm



# HORIZON TRAILER SPECIFICATIONS

	190 HORIZON (Model# D03916)	
	US	METRIC
Length with Tongue	<b>20'6"</b>	6.07 m
Length without Tongue	<b>17'6"</b>	5.31 m
Width	<b>96"</b>	2.43 m
Empty Weight	<b>800 lbs</b>	360 kg
Carrying Capacity	<b>3,940 lbs</b>	1,773 kg
GVWR (Gross Vehicle Weight Rating)	<b>4,740 lbs</b>	2,133 kg
GAWR (Gross Axle Wt. Rat.)	<b>4,740 lbs</b>	2,133 kg
Height (Top of Windshield, with Boat on Trailer)	<b>76"</b>	1.92 m
Tire Size	<b>ST 225-75R15 Opt H78X15ST</b>	ST 225-75R15 Opt H78X15ST
Load Range	<b>D</b>	D
Axle	<b>Single</b>	Single
Hub	<b>6 Lug 5 1/2" Bolt Pattern</b>	6 Lug 14 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,400 lbs</b>	630 kg
Ball Size	<b>2"</b>	5 cm



# HORIZON TRAILER SPECIFICATIONS

	200 IO & OB(S) HORIZON (Model# D03917C)	
	US	METRIC
Length with Tongue	21'	6.3 m
Length without Tongue	18'	5.4 m
Width	102"	2.55 m
Empty Weight	850 lbs	383 kg
Carrying Capacity	3,890 lbs	1,751 kg
GVWR (Gross Vehicle Weight Rating)	4,740 lbs	2,133 kg
GAWR (Gross Axle Wt. Rat.)	4,740 lbs	2,133 kg
Height (Top of Windshield, with Boat on Trailer)	80"	2 m
Tire Size	ST225/75R15 Opt. H-78x15ST D Load Range	ST225/75R15 Opt. H-78x15ST D Load Range
Load Range	D	D
Axle	Single	Single
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	1,400 lbs	630 kg
Ball Size	2"	5 cm

Note: Load capacity for IO and OB trailers varies. Please specify when ordering and be advised that these trailers are not interchangeable.

	200 IO & OB (T) HORIZON (Model# D05017/ D04017) <sup>1</sup>	
	US	METRIC
Length with Tongue	21'	6.3 m
Length without Tongue	18'	5.4 m
Width	102"	2.55 m
Empty Weight	990 lbs	446 kg
Carrying Capacity	5,010/4,010 lbs	2,255/1,805 kg
GVWR (Gross Vehicle Weight Rating)	6,000/5,000 lbs	2,700/2,250 kg
GAWR (Gross Axle Wt. Rat.)	3,000/2,500 lbs	1,350/1,125 kg
Height (Top of Windshield, with Boat on Trailer)	80"	2 m
Tire Size	ST205/75R14 Opt. F78x14	ST205/75R14 Opt. F78x14
Load Range	C/B	C/B
Axle	Tandem	Tandem
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Bolt Pattern
Wheel Type	Modstyle	Modstyle
Jack Capacity	750 lbs	338 kg
Winch	1,400 lbs	630 kg
Ball Size	2"	5 cm

S = Single Axle T = Tandem Axle OB = Outboard IO = Stern Drive <sup>1</sup> = With Brakes/Without Brakes



# 203 HORIZON COAST RUNNER TRAILER SPECIFICATIONS

## 203 HORIZON COAST RUNNER (Model# D03917C)

	US	METRIC
Length with Tongue	<b>21'</b>	6.3 m
Length without Tongue	<b>18'</b>	5.4 m
Width	<b>102"</b>	2.55 m
Empty Weight	<b>850 lbs</b>	383 kg
Carrying Capacity	<b>3,890 lbs</b>	1,751 kg
GVWR (Gross Vehicle Weight Rating)	<b>4,740 lbs</b>	2,133 kg
GAWR (Gross Axle Wt. Rat.)	<b>4,740 lbs</b>	2,133 kg
Height (Top of Windshield, with Boat on Trailer)	<b>80"</b>	2m
Tire Size	<b>ST225/75R15 OPT H78 X 15</b>	ST225/75R15 OPT H78 X 15
Load Range	<b>D</b>	D
Axle	<b>Single</b>	Single
Hub	<b>5 Lug 4<sup>1</sup>/<sub>2</sub>" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,400 lbs</b>	630 kg
Ball Size	<b>2"</b>	5 cm



# HORIZON TRAILER SPECIFICATIONS

	220 (S) HORIZON (Model# 3718 B)	
	US	METRIC
Length with Tongue	<b>23'</b>	6.9 m
Length without Tongue	<b>19'</b>	5.7 m
Width	<b>102"</b>	2.55 m
Empty Weight	<b>955 lbs</b>	430 kg
Carrying Capacity	<b>3,785 lbs</b>	1,703 kg
GVWR (Gross Vehicle Weight Rating)	<b>4,740 lbs</b>	2,133 kg
GAWR (Gross Axle Wt. Rat.)	<b>4,740 lbs</b>	2,133 kg
Height (Top of Windshield, with Boat on Trailer)	<b>84"</b>	2.1 m
Tire Size	<b>ST225/75R15 Opt. H78x15 ST</b>	ST225/75R15 Opt. H78x15 ST
Load Range	<b>D</b>	D
Axle	<b>Single</b>	Single
Hub	<b>6 Lug 5 1/2" Bolt Pattern</b>	6 Lug 14 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,800 lbs</b>	810 kg
Ball Size	<b>2"</b>	5 cm

	220 (T) HORIZON (Model D0 4918/D0 3918B) <sup>1</sup>	
	US	METRIC
Length with Tongue	<b>23'</b>	6.9 m
Length without Tongue	<b>19'</b>	5.7 m
Width	<b>102"</b>	2.55 m
Empty Weight	<b>1075 lbs</b>	484 kg
Carrying Capacity <sup>1</sup>	<b>4,925/3,925 lbs</b>	2,216/1,766 kg
GVWR <sup>1</sup> (Gross Vehicle Weight Rating)	<b>6,000/5,000 lbs</b>	2,700/2,250 kg
GAWR <sup>1</sup> (Gross Axle Wt. Rat.)	<b>3,000/2,500 lbs</b>	1,350/1,125 kg
Height (Top of Windshield, with Boat on Trailer)	<b>85"</b>	2.15 m
Tire Size	<b>ST205/75R14 Opt F78 X 14</b>	ST205/75R14 Opt F78 X 14
Load Range	<b>C</b>	C
Axle	<b>Tandem</b>	Tandem
Hub	<b>5 Lug 4 1/2" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,800 lbs</b>	810 kg
Ball Size	<b>2"</b>	5 cm

S = Single Axle T = Tandem Axle  
<sup>1</sup> = With Brakes/Without Brakes



# HORIZON TRAILER SPECIFICATIONS

## 240 (T) HORIZON (Model# 4819)

	<b>US</b>	<b>METRIC</b>
Length with Tongue	<b>23'8"</b>	7.1 m
Length without Tongue	<b>20'10"</b>	6.25 m
Width	<b>102"</b>	2.55 m
Empty Weight	<b>1,120 lbs</b>	504 kg
Carrying Capacity	<b>4,880 lbs</b>	2,196 kg
GVWR (Gross Vehicle Weight Rating)	<b>6,000 lbs</b>	2,700 kg
GAWR (Gross Axle Wt. Rat.)	<b>3,000 lbs</b>	1,350 kg
Height (Top of Windshield, with Boat on Trailer)	<b>92"</b>	2.3 m
Tire Size	<b>ST215/75R14 Opt. G78 X 14</b>	ST215/75R14 Opt. G78 X 14
Load Range	<b>C</b>	C
Axle	<b>Tandem</b>	Tandem
Hub	<b>5 Lug 4<sup>1</sup>/<sub>2</sub>" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>2,000 lbs</b>	900 kg
Ball Size	<b>2"</b>	5 cm

T = Tandem Axle



# CANDIA TRAILER SPECIFICATIONS

## 214 CANDIA (Model# D07644A)

	<b>US</b>	<b>METRIC</b>
Length with tongue	<b>23'</b>	6.9 m
Length without tongue	<b>19'</b>	5.7 m
Width	<b>102"</b>	2.55 m
Empty Weight	<b>1,076 lbs</b>	484 kg
Carrying Capacity	<b>4,924 lbs</b>	2,216 kg
GVWR (Gross Vehicle Weight Rating)	<b>6,000 lbs</b>	2,700 kg
GAWR (Gross Axle Wt. Rat.)	<b>3,000 lbs</b>	1,350 kg
Height (Top of Windshield, with Boat on Trailer)	<b>NA</b>	NA
Tire Size	<b>ST205/75R14</b> Opt. H-78x14ST C Load Range	ST205/75R14 Opt. H-78x14ST C Load Range
Load Range	<b>C</b>	C
Axle	<b>Tandem</b>	Tandem
Hub	<b>5 Lug 4 1/2" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,800 lbs</b>	810 kg
Ball Size	<b>2"</b>	5 cm

NA = Not Available



# SUNDOWNER TRAILER SPECIFICATIONS

## 195 SUNDOWNER (Model# D07043A)

	US	METRIC
Length with Tongue	<b>20'6"</b>	6.22 m
Length without Tongue	<b>17'3"</b>	5.23 m
Width	<b>96"</b>	2.44 m
Empty Weight	<b>800 lbs</b>	360 kg
Carrying Capacity	<b>4,000 lbs</b>	1,800 kg
GVWR (Gross Vehicle Weight Rating)	<b>4,800 lbs</b>	1,067 kg
GAWR (Gross Axle Wt. Rat.)	<b>4,800 lbs</b>	1,067 kg
Height (Top of Windshield, with Boat on Trailer)	<b>83"</b>	2.10 m
Tire Size	<b>ST225/75R15</b>	ST225/75R15
Load Range	<b>D</b>	D
Axle	<b>Single</b>	Single
Hub	<b>6 Lug 5 1/2" Bolt Pattern</b>	6 Lug 14 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,400 lbs</b>	630 kg
Ball Size	<b>2"</b>	5 cm

Note: Load capacity for IO and OB trailers varies. Please specify when ordering and be advised that these trailers are not interchangeable.





# SUNDOWNER TRAILER SPECIFICATIONS

## 205 IO & OB(S) SUNDOWNER (Model# D03917C)

	US	METRIC
Length with Tongue	<b>21'</b>	6.3 m
Length without Tongue	<b>18'</b>	5.4 m
Width	<b>102"</b>	2.55 m
Empty Weight	<b>850 lbs</b>	383 kg
Carrying Capacity	<b>3,890 lbs</b>	1,751 kg
GVWR (Gross Vehicle Weight Rating)	<b>4,740 lbs</b>	2,133 kg
GAWR (Gross Axle Wt. Rat.)	<b>4,740 lbs</b>	2,133 kg
Height (Top of Windshield, with Boat on Trailer)	<b>80"</b>	2 m
Tire Size	<b>ST225/75R15</b>	ST225/75R15
	<b>OPT H-78X15ST D Load Range</b>	OPT H-78X15ST D Load Range
Load Range	<b>D</b>	D
Axle	<b>Single</b>	Single
Hub	<b>6 Lug 5 1/2" Bolt Pattern</b>	6 Lug 14 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,400 lbs</b>	630 kg
Ball Size	<b>2"</b>	5 cm

Note: Load capacity for IO and OB trailers varies. Please specify when ordering and be advised that these trailers are not interchangeable.

## 205 IO & OB(T) SUNDOWNER (Model# D05017/D04017)<sup>1</sup>

	US	METRIC
Length with Tongue	<b>21'</b>	6.3 m
Length without Tongue	<b>18'</b>	5.4 m
Width	<b>102"</b>	2.55 m
Empty Weight	<b>990 lbs</b>	446 kg
Carrying Capacity <sup>1</sup>	<b>5,010 lbs / 4,010 lbs</b>	2,255 kg / 1,805 kg
GVWR <sup>1</sup> (Gross Vehicle Weight Rating)	<b>6,000 lbs / 5,000 lbs</b>	2,700 kg / 2,250 kg
GAWR <sup>1</sup> (Gross Axle Wt. Rat.)	<b>3,000 lbs / 2,500 lbs</b>	1,350 kg / 1,125 kg
Height (Top of Windshield, with Boat on Trailer)	<b>80"</b>	2 m
Tire Size	<b>ST205/75R14</b>	ST205/75R14
	<b>Opt F78 X 14</b>	Opt F78 X 14
Load Range	<b>C/B</b>	C/B
Axle	<b>Tandem</b>	Tandem
Hub	<b>5 Lug 4 1/2" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,400 lbs</b>	630 kg
Ball Size	<b>2"</b>	5 cm

S = Single Axle T = Tandem Axle OB = Outboard IO = Stern Drive

<sup>1</sup> = With brakes/Without brakes



# SUNDOWNER TRAILER SPECIFICATIONS

225 SUNDOWNER (Model D04918/D03918B)

	US	METRIC
Length with Tongue	<b>23'</b>	6.9 m
Length without Tongue	<b>19'</b>	5.7 m
Width	<b>102"</b>	2.55 m
Empty Weight	<b>1,075 lbs</b>	484 kg
Carrying Capacity <sup>1</sup>	<b>4,925/3,925 lbs</b>	2,216 / 1,766 kg
GVWR <sup>1</sup> (Gross Vehicle Weight Rating)	<b>6,000/5,000 lbs</b>	2,700 / 2,250 kg
GAWR <sup>1</sup> (Gross Axle Wt. Rat.)	<b>3,000 / 2,500 lbs</b>	1,350 / 1,125 kg
Height (Top of Windshield, with Boat on Trailer)	<b>88"</b>	2.23 m
Tire Size	<b>ST205/75R14 OPT. F78 x 14</b>	ST205/75R14 OPT. F78 x 14
Load Range	<b>C</b>	C
Axle	<b>Tandem</b>	Tandem
Hub	<b>5 Lug 4 1/2" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>1,800 lbs</b>	810 kg
Ball Size	<b>2"</b>	5 cm

<sup>1</sup> = With Brakes/Without Brakes  
No single axle available for this trailer



# SUNDOWNER TRAILER SPECIFICATIONS

	245 SUNDOWNER (Model# D05819)	
	US	METRIC
Length with tongue	<b>23'2"</b>	7.03 m
Length without tongue	<b>18'10"</b>	5.72 m
Width	<b>96"</b>	2.43 m
Empty Weight	<b>1,125 lbs</b>	506 kg
Carrying Capacity	<b>5,875 lbs</b>	2,644 kg
GVWR (Gross Vehicle Weight Rating)	<b>7,000 lbs</b>	3,150 kg
GAWR (Gross Axle Wt. Rat.)	<b>3,500 lbs</b>	1,575 kg
Height (Top of Windshield, with Boat on Trailer)	<b>94"</b>	2.38 m
Tire Size	<b>ST215/75R14 Opt G78 X 14ST</b>	ST215/75R14 Opt G78 X 14ST
Load Range	<b>C</b>	C
Axle	<b>Tandem</b>	Tandem
Hub	<b>5 Lug 4<sup>1</sup>/<sub>2</sub>" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>2,000 lbs</b>	900 kg
Ball Size	<b>2<sup>5</sup>/<sub>16</sub>"</b>	6 cm



# VISTA

## TRAILER SPECIFICATIONS

### 238 VISTA (Model# D0 5920)

	US	METRIC
Length with Tongue	<b>24'6"</b>	7.44 m
Length without Tongue	<b>20'6"</b>	6.22 m
Width	<b>96"</b>	2.44 m
Empty Weight	<b>1,148 lbs</b>	517 kg
Carrying Capacity	<b>5,852 lbs</b>	2,633 kg
GVWR (Gross Vehicle Weight Rating)	<b>7,000 lbs</b>	3,150 kg
GAWR (Gross Axle Wt. Rat.)	<b>3,500 lbs</b>	1,575 kg
Height (Top of Windshield, with Boat on Trailer)	<b>115"</b>	2.91 m
Tire Size	<b>ST215/75R14 Opt. G-78x14ST</b>	ST215/75R14 Opt. G-78x14ST
Load Range	<b>C</b>	C
Axle	<b>Tandem</b>	Tandem
Hub	<b>5 Lug 4<sup>1</sup>/<sub>2</sub>" Bolt Pattern</b>	5 Lug 11 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>2,000 lbs</b>	900 kg
Ball Size	<b>2 5/16"</b>	6 cm



# VISTA

## TRAILER SPECIFICATIONS

258 VISTA (Model# D07022)

	US	METRIC
Length with Tongue	<b>27'2"</b>	8.25 m
Length without Tongue	<b>23'6"</b>	7.13 m
Width	<b>102"</b>	2.58 m
Empty Weight	<b>1,690 lbs</b>	761 kg
Carrying Capacity	<b>7,040 lbs</b>	3,168 kg
GVWR (Gross Vehicle Weight Rating)	<b>8,730 lbs</b>	3,929 kg
GAWR (Gross Axle Wt. Rat.)	<b>4,365 lbs</b>	1,964 kg
Height (Top of Windshield, with Boat on Trailer)	<b>140"</b> <b>118" w/Radar Arch</b>	3.54 m 300 cm w/the Arch
Tire Size	<b>ST225/75R15</b> <b>Opt. H78X15D Load Range</b>	ST225/75R15 Opt. H78X15D Load Range
Load Range	<b>D</b>	D
Axle	<b>Tandem</b>	Tandem
Hub	<b>6 Lug 5 1/2" Bolt Pattern</b>	6 Lug 14 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>750 lbs</b>	338 kg
Winch	<b>2,600 lbs</b>	1170 kg
Ball Size	<b>2 5/16"</b>	6 cm



# VISTA

## TRAILER SPECIFICATIONS

### 278 VISTA (Model# D011025)

	<b>US</b>	<b>METRIC</b>
Length with Tongue	<b>30'2"</b>	9.16 m
Length without Tongue	<b>NA</b>	NA
Width	<b>102"</b>	2.55 m
Empty Weight	<b>1,980 lbs</b>	891 kg
Carrying Capacity	<b>11,010 lbs</b>	4,955 kg
GVWR (Gross Vehicle Weight Rating)	<b>12,990 lbs</b>	5,846 kg
GAWR (Gross Axle Wt. Rat.)	<b>4,330 lbs</b>	1,949 kg
Height (Top of Windshield, with Boat on Trailer)	<b>128"</b> <b>150" w/Radar Arch</b>	3.24 m 381 cm w/Radar Arch
Tire Size	<b>ST225/75R15</b> <b>Opt H78X15ST</b>	ST225/75R15 Opt H78X15ST
Load Range	<b>D</b>	D
Axle	<b>Tri-axle</b>	Tri-axle
Hub	<b>6 Lug 5 1/2" Bolt Pattern</b>	6 Lug 14 cm Bolt Pattern
Wheel Type	<b>Modstyle</b>	Modstyle
Jack Capacity	<b>2,000 lbs</b>	900 kg
Winch	<b>2,600 lbs</b>	1,170 kg
Ball Size	<b>2 5/16"</b>	6 cm



# JET DRIVE SPECIFICATIONS

## 115 TURBOJET

	US	METRIC
Weight	<b>250 lbs</b>	113 kg
Engine Type	<b>Cross Flow 90°V4</b>	Cross Flow 90°V4
Bore, Stroke Displacement	<b>3.50" x 2.59" 99.6 cu. in.</b>	89 mm x 66 mm 1632 c.c.
Starting	<b>Electric 12-volt key switch</b>	Electric 12-volt key switch
Propshaft Power	<b>115-HP at 5000 RPM</b>	86-KW at 5000 RPM
Full-Throttle Operating Range	<b>4500-5500 RPM</b>	4500-5500 RPM
Carburetion	<b>2 dual-throat carburetors</b>	2 dual-throat carburetors
Alternator	<b>3/9 amp with voltage regulator</b>	3/9 amp with voltage regulator
Cooling	<b>Automatic pressure- temperature controlled</b>	Automatic pressure- temperature controlled
Lubricaiton	<b>Oil Injection</b>	Oil Injection
Forward Thrust	<b>680 lbs</b>	3030 N
Reverse Thrust	<b>190 lbs</b>	850 N
Impeller, Diameter Material	<b>6.50" / Stainless Steel</b>	16.5 cm / Stainless Steel

Turbojet is power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

**FUEL FACTS:** All 1995 Turbojets can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-W3 outboard lubricant. If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



# OUTBOARD SPECIFICATIONS

	90 TL	
	US	METRIC
Shaft Length	<b>20"</b>	51 cm
Weight	<b>301 lbs</b>	137 kg
Engine Type	<b>Cross Flow 90°V4</b>	Cross Flow 90°V4
Bore, Stroke Displacement	<b>3.50" x 2.59" 99.6 cu. in.</b>	89 mm x 66 mm 1632 c.c.
Starting	<b>Electric 12-volt key switch</b>	Electric 12-volt key switch
Trim	<b>Power trim &amp; tilt standard</b>	Power trim & tilt standard
Propshaft Power	<b>90-HP at 5000 RPM</b>	67-KW at 5000 RPM
Full-Throttle Operating Range	<b>4500-5500 RPM</b>	4500-5500 RPM
Gear Ratio/Shift	<b>13:26 (.5)/F-N-R</b>	13:26 (.5)/F-N-R
Carburetion	<b>2 dual-throat carburetors</b>	2 dual-throat carburetors
Alternator	<b>3/9 amp with voltage regulator</b>	3/9 amp with voltage regulator
Cooling	<b>Automatic pressure- temperature controlled</b>	Automatic pressure- temperature controlled

Evinrude and Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

#### ALL OUTBOARD MODELS

**MAXIMUM BOAT HORSEPOWER:** Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

**FUEL FACTS:** All 1995 Evinrude and Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-W3 outboard lubricant.

If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.





# OUTBOARD SPECIFICATIONS

## 90 SL

	US	METRIC
Shaft Length	<b>20"</b>	51 cm
Weight	<b>319 lbs</b>	145 kg
Engine Type	<b>Loop Charged 60°V4</b>	Loop Charged 60°V4
Bore, Stroke Displacement	<b>3.60" x 2.59" 105 cu. in.</b>	91 mm x 66 mm 1730 c.c.
Starting	<b>Electric 12-volt key switch Quickstart™ Electronic Starting</b>	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	<b>Power trim &amp; tilt standard</b>	Power trim & tilt standard
Propshaft Power	<b>90-HP at 5000 RPM</b>	67-KW at 5000 RPM
Full-Throttle Operating Range	<b>4500-5500 RPM</b>	4500-5500 RPM
Gear Ratio/Shift	<b>13:26 (.5)/F-N-R</b>	13:26 (.5)/F-N-R
Carburetion	<b>2 dual-throat carburetors</b>	2 dual-throat carburetors
Alternator	<b>5/12 amp with voltage regulator</b>	5/12 amp with voltage regulator
Cooling	<b>Automatic pressure- temperature controlled S.L.O.W.™</b>	Automatic pressure- temperature controlled S.L.O.W.™

Evinrude and Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

### ALL OUTBOARD MODELS

**MAXIMUM BOAT HORSEPOWER:** Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

**FUEL FACTS:** All 1995 Evinrude and Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-W3 outboard lubricant.

If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



# OUTBOARD SPECIFICATIONS

## 115 TL

	US	METRIC
Shaft Length	<b>20"</b>	51 cm
Weight	<b>306 lbs</b>	139 kg
Engine Type	<b>Cross Flow 90°V4</b>	Cross Flow 90°V4
Bore, Stroke Displacement	<b>3.50" x 2.59" 99.6 cu. in.</b>	89 mm x 66 mm 1632 c.c.
Starting	<b>Electric 12-volt key switch</b>	Electric 12-volt key switch
Trim	<b>Power trim &amp; tilt standard</b>	Power trim & tilt standard
Propshaft Power	<b>115-HP at 5000 RPM</b>	86-KW at 5000 RPM
Full-Throttle Operating Range	<b>4500-5500 RPM</b>	4500-5500 RPM
Gear Ratio/Shift	<b>13:26 (.5)/F-N-R</b>	13:26 (.5)/F-N-R
Carburetion	<b>2 dual-throat carburetors</b>	2 dual-throat carburetors
Alternator	<b>3/9 amp with voltage regulator</b>	3/9 amp with voltage regulator
Cooling	<b>Automatic pressure- temperature controlled</b>	Automatic pressure- temperature controlled

Evinrude and Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

### ALL OUTBOARD MODELS

**MAXIMUM BOAT HORSEPOWER:** Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

**FUEL FACTS:** All 1995 Evinrude and Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-W3 outboard lubricant.

If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



# OUTBOARD SPECIFICATIONS

## 115 SL

	US	METRIC
Shaft Length	<b>20"</b>	51 cm
Weight	<b>319 lbs</b>	144 kg
Engine Type	<b>Loop Charged 60°V4</b>	Loop Charged 60°V4
Bore, Stroke Displacement	<b>3.60" x 2.59" 105 cu. in.</b>	91 mm x 66 mm 1730 c.c.
Starting	<b>Electric 12-volt key switch Quickstart™ Electronic Starting</b>	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	<b>Power trim &amp; tilt standard</b>	Power trim & tilt standard
Propshaft Power	<b>115-HP at 5000 RPM</b>	86-KW at 5000 RPM
Full-Throttle Operating Range	<b>4500-5500 RPM</b>	4500-5500 RPM
Gear Ratio/Shift	<b>13:26 (.5)/F-N-R</b>	13:26 (.5)/F-N-R
Carburetion	<b>2 dual-throat carburetors</b>	2 dual-throat carburetors
Alternator	<b>5/12 amp with voltage regulator</b>	5/12 amp with voltage regulator
Cooling	<b>Automatic pressure- temperature controlled S.L.O.W.™</b>	Automatic pressure- temperature controlled S.L.O.W.™

Evinrude and Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

### ALL OUTBOARD MODELS

**MAXIMUM BOAT HORSEPOWER:** Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

**FUEL FACTS:** All 1995 Evinrude and Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-W3 outboard lubricant.

If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



# OUTBOARD SPECIFICATIONS

	130 TL/TX	
	US	METRIC
Shaft Length	<b>20" / 25"</b>	51 cm / 63 cm
Weight	<b>373 / 378 lbs</b>	169 / 171 kg
Engine Type	<b>Loop Charged 90°V4</b>	Loop Charged 90°V4
Bore, Stroke Displacement	<b>3.69" x 2.86" 122 cu. in.</b>	94 mm x 73 mm 2000 c.c.
Starting	<b>Electric 12-volt key switch Quickstart™ Electronic Starting</b>	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	<b>Power trim &amp; tilt standard</b>	Power trim & tilt standard
Propshaft Power	<b>130-HP at 5500 RPM</b>	97-KW at 5500 RPM
Full-Throttle Operating Range	<b>5000-6000 RPM</b>	5000-6000 RPM
Gear Ratio/Shift	<b>12:27 (.44) F-N-R</b>	12:27 (.44) F-N-R
Carburetion	<b>2 dual-throat carburetors</b>	2 dual-throat carburetors
Alternator	<b>3/9 amp with voltage regulator</b>	3/9 amp with voltage regulator
Cooling	<b>Automatic pressure- temperature controlled S.L.O.W.™</b>	Automatic pressure- temperature controlled S.L.O.W.™

Evinrude and Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

#### ALL OUTBOARD MODELS

**MAXIMUM BOAT HORSEPOWER:** Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

**FUEL FACTS:** All 1995 Evinrude and Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-W3 outboard lubricant.

If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.

# OUTBOARD SPECIFICATIONS

	150 SL/EX	
	US	METRIC
Shaft Length	<b>20" / 25"</b>	51 cm / 63 cm
Weight	<b>370 / 375 lbs</b>	168 / 170 kg
Engine Type	<b>Loop Charged 60°V6</b>	Loop Charged 60°V6
Bore, Stroke Displacement	<b>3.60" x 2.59" 158 cu. in.</b>	91 mm x 66 mm 2589 c.c.
Starting	<b>Electric 12-volt key switch Quickstart™ Electronic Starting</b>	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	<b>Power trim &amp; tilt standard</b>	Power trim & tilt standard
Propshaft Power	<b>150-HP at 5000 RPM</b>	112-KW at 5000 RPM
Full-Throttle Operating Range	<b>4500-5500.RPM</b>	4500-5500 RPM
Gear Ratio/Shift	<b>14:26 (.54)/F-N-R</b>	14:26 (.54)/F-N-R
Carburetion	<b>2 triple-throat carburetors</b>	2 triple-throat carburetors
Alternator	<b>35 amp with voltage regulator</b>	35 amp with voltage regulator
Cooling	<b>Automatic pressure- temperature controlled S.L.O.W.™</b>	Automatic pressure- temperature controlled S.L.O.W.™

Evinrude and Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

#### ALL OUTBOARD MODELS

**MAXIMUM BOAT HORSEPOWER:** Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

**FUEL FACTS:** All 1995 Evinrude and Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-W3 outboard lubricant.

If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



# OUTBOARD SPECIFICATIONS

	175 EX	
	US	METRIC
Shaft Length	<b>25"</b>	63 cm
Weight	<b>375 lbs</b>	170 kg
Engine Type	<b>Loop Charged 60°V6</b>	Loop Charged 60°V6
Bore, Stroke Displacement	<b>3.60" x 2.59" 158 cu. in.</b>	91 mm x 66 mm 2589 c.c.
Starting	<b>Electric 12-volt key switch Quickstart™ Electronic Starting</b>	Electric 12-volt key switch Quickstart™ Electronic Starting
Trim	<b>Power trim &amp; tilt standard</b>	Power trim & tilt standard
Propshaft Power	<b>175-HP at 5000 RPM</b>	131-KW at 5000 RPM
Full-Throttle Operating Range	<b>4500-5500 RPM</b>	4500-5500 RPM
Gear Ratio/Shift	<b>14:26 (.54)/F-N-R</b>	14:26 (.54)/F-N-R
Carburetion	<b>2 triple-throat carburetors</b>	2 triple-throat carburetors
Alternator	<b>35 amp with voltage regulator</b>	35 amp with voltage regulator
Cooling	<b>Automatic pressure- temperature controlled S.L.O.W.™</b>	Automatic pressure- temperature controlled S.L.O.W.™

Evinrude and Johnson outboards are power rated in accordance with NMMA procedure, using the International Council of Marine Industry Associations (ICOMIA) standard 28/83.

#### ALL OUTBOARD MODELS

**MAXIMUM BOAT HORSEPOWER:** Most outboard boats by law must now carry a plate certifying the maximum horsepower permitted under U.S. Coast Guard regulations.

**FUEL FACTS:** All 1995 Evinrude and Johnson Outboards can use lead-free, leaded regular, or gasoline with up to 10% ethanol or 5% methanol plus 5% cosolvents, but avoid alcohol-extended fuels if you experience engine running problems, so long as the fuel is at least 87 AKI (octane) mixed with Evinrude or Johnson TC-W3 outboard lubricant.

If Evinrude or Johnson Outboard Lubricant is not available another NMMA certified TC-W3 or CEC approved lubricant (oil) may be used at the recommended mixing ratio.



# STERN DRIVE SPECIFICATIONS

## ENGINE

3.0L

	US	METRIC
Power (propshaft)	<b>135 hp</b>	101 kw
Displacement	<b>181 cu. in.</b>	3.0 L
Cylinders	<b>4</b>	4
Bore / Stroke	<b>4.00" x 3.60"</b>	102 mm x 91 mm
Compression Ratio	<b>9.3:1</b>	9.3:1
Main Bearings	<b>5</b>	5
Fuel System	<b>2-Venturi, adj. low spd/fxd high spd jets</b>	2-Venturi, adj. low spd/fxd high spd jets
Choke	<b>Automatic</b>	Automatic
Full Throttle Operating Range	<b>4200-4600 rpm</b>	4200-4600 rpm

## DRIVE UNIT

Shift	<b>Cone F-N-R</b>	Cone F-N-R
Gear Ratio	<b>1.85:1</b>	1.85:1
Gear Ratio, High Altitude	<b>NA</b>	NA
Maximum Prop Diameter	<b>15<sup>1</sup>/<sub>2</sub>"</b>	39 cm

## DIMENSIONS

Length	<b>33<sup>15</sup>/<sub>16</sub>"</b>	85 cm
*Height - Above Crankshaft Centerline	<b>19<sup>5</sup>/<sub>8</sub>"</b>	50 cm
Total Weight	<b>700 lbs</b>	317 kg

## STANDARD / OPTIONAL FEATURES

Power Trim	<b>STD</b>	STD
Power Steering	<b>STD</b>	STD
Thru-Hub™ Exhaust	<b>STD</b>	STD
Transom Mounting	<b>STD</b>	STD
High Output Alternator	<b>STD</b>	STD
4-Anode Saltwater Protection	<b>STD</b>	STD
Hardened Alloy Steel Drive Shaft	<b>STD</b>	STD
19-Step Metal Preparation	<b>STD</b>	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	<b>STD</b>	STD
CobraSkin™ High-Solid Paint Finish	<b>STD</b>	STD
Hydraulic Shock Absorbers	<b>STD</b>	STD
Easy Access Water Pump	<b>STD</b>	STD
Stainless Steel Heli-Coil® Inserts	<b>STD</b>	STD
Counter Rotation	<b>STD</b>	STD
Remote Oil Filter	<b>NA</b>	NA
Engine Oil Cooler	<b>NA</b>	NA
OMC 2-Year Owner Protection	<b>STD</b>	STD
OMC 1 + 2* Extended Protection Plan	<b>OPT</b>	OPT
Spitfire Electronic Eng. Manage. Sys.	<b>NA</b>	NA

\*Add 13<sup>3</sup>/<sub>16</sub>" / 34cm for height above anti-ventilation plate NA = Not Available



# STERN DRIVE SPECIFICATIONS

## ENGINE

4.3L

	US	METRIC
Power (propshaft)	<b>160 hp</b>	119 kw
Displacement	<b>262 cu. in.</b>	4.3 L
Cylinders	<b>6</b>	6
Bore / Stroke	<b>4.00" x 3.48"</b>	102 mm x 88 mm
Compression Ratio	<b>9.3:1</b>	9.3:1
Main Bearings	<b>4</b>	4
Fuel System	<b>2-Venturi, adj. low spd/txd high spd jets</b>	2-Venturi, adj. low spd/txd high spd jets
Choke	<b>Automatic</b>	Automatic
Full Throttle Operating Range	<b>4200-4600 rpm</b>	4200-4600 rpm

## DRIVE UNIT

Shift	Cone F-N-R	Cone F-N-R
Gear Ratio	<b>1.66:1</b>	1.66:1
Gear Ratio, High Altitude	<b>1.85:1</b>	1.85:1
Maximum Prop Diameter	<b>15<sup>1</sup>/<sub>2</sub>"</b>	39 cm

## DIMENSIONS

Length	<b>31<sup>3</sup>/<sub>4</sub>"</b>	79 cm
*Height - Above Crankshaft Centerline	<b>19<sup>3</sup>/<sub>4</sub>"</b>	50 cm
Total Weight	<b>825 lbs</b>	374 kg

## STANDARD / OPTIONAL FEATURES

Power Trim	<b>STD</b>	STD
Power Steering	<b>STD</b>	STD
Thru-Hub™ Exhaust	<b>STD</b>	STD
Transom Mounting	<b>STD</b>	STD
High Output Alternator	<b>STD</b>	STD
4-Anode Saltwater Protection	<b>STD</b>	STD
Hardened Alloy Steel Drive Shaft	<b>STD</b>	STD
19-Step Metal Preparation	<b>STD</b>	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	<b>STD</b>	STD
CobraSkin™ High-Solid Paint Finish	<b>STD</b>	STD
Hydraulic Shock Absorbers	<b>STD</b>	STD
Easy Access Water Pump	<b>STD</b>	STD
Stainless Steel Heli-Coil® Inserts	<b>STD</b>	STD
Counter Rotation	<b>STD</b>	STD
Remote Oil Filter	<b>OPT</b>	OPT
Engine Oil Cooler	<b>NA</b>	NA
OMC 2-Year Owner Protection	<b>STD</b>	STD
OMC 1 + 2*Extended Protection Plan	<b>OPT</b>	OPT
Spitfire Electronic Eng. Manage. Sys.	<b>NA</b>	NA

\*Add 13<sup>3</sup>/<sub>16</sub>" / 34cm for height above anti-ventilation plate NA = Not Available





# STERN DRIVE SPECIFICATIONS

## ENGINE

5.0L

	US	METRIC
Power (propshaft)	<b>190 hp</b>	142 kw
Displacement	<b>302 cu. in.</b>	5.0 L
Cylinders	<b>8</b>	8
Bore / Stroke	<b>4.00" x 3.00"</b>	102 mm x 76 mm
Compression Ratio	<b>8.4:1</b>	8.4:1
Main Bearings	<b>5</b>	5
Fuel System	<b>2-Venturi, adj. low spd/fxd high spd jets</b>	2-Venturi, adj. low spd/fxd high spd jets
Choke	<b>Automatic</b>	Automatic
Full Throttle Operating Range	<b>4000-4400 rpm</b>	4000-4400 rpm

## DRIVE UNIT

	Cone F-N-R	Cone F-N-R
Shift	<b>Cone F-N-R</b>	Cone F-N-R
Gear Ratio	<b>1.66:1</b>	1.66:1
Gear Ratio, High Altitude	<b>1.85:1</b>	1.85:1
Maximum Prop Diameter	<b>15<sup>1</sup>/<sub>2</sub>"</b>	39 cm

## DIMENSIONS

Length	<b>37<sup>5</sup>/<sub>8</sub>"</b>	96 cm
*Height - Above Crankshaft Centerline	<b>20<sup>1</sup>/<sub>8</sub>"</b>	51 cm
Total Weight	<b>926 lbs</b>	420 kg

## STANDARD / OPTIONAL FEATURES

Power Trim	<b>STD</b>	STD
Power Steering	<b>STD</b>	STD
Thru-Hub™ Exhaust	<b>STD</b>	STD
Transom Mounting	<b>STD</b>	STD
High Output Alternator	<b>STD</b>	STD
4-Anode Saltwater Protection	<b>STD</b>	STD
Hardened Alloy Steel Drive Shaft	<b>STD</b>	STD
19-Step Metal Preparation	<b>STD</b>	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	<b>STD</b>	STD
CobraSkin™ High-Solid Paint Finish	<b>STD</b>	STD
Hydraulic Shock Absorbers	<b>STD</b>	STD
Easy Access Water Pump	<b>STD</b>	STD
Stainless Steel Heli-Coil® Inserts	<b>STD</b>	STD
Counter Rotation	<b>STD</b>	STD
Remote Oil Filter	<b>NA</b>	NA
Engine Oil Cooler	<b>NA</b>	NA
OMC 2-Year Owner Protection	<b>STD</b>	STD
OMC 1 + 2*Extended Protection Plan	<b>OPT</b>	OPT
Spitfire Electronic Eng. Manage. Sys.	<b>NA</b>	NA

\*Add 13<sup>3</sup>/<sub>16</sub>" / 34cm for height above anti-ventilation plate NA = Not Available



# STERN DRIVE SPECIFICATIONS

## ENGINE

5.0L EFI

	US	METRIC
Power (propshaft)	215 hp	160 kw
Displacement	302 cu. in.	5.0 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.00"	102 mm x 76 mm
Compression Ratio	8.5:1	8.5:1
Main Bearings	5	5
Fuel System	Multi-port fuel injection	Multi-port fuel injection
Full Throttle Operating Range	4200-4600 rpm	4200-4600 rpm

## DRIVE UNIT

Shift	Cone F-N-R	Cone F-N-R
Gear Ratio	1.60:1	1.60:1
Gear Ratio, High Altitude	1.66:1	1.66:1
Maximum Prop Diameter	15 <sup>1</sup> / <sub>2</sub> "	39 cm

## DIMENSIONS

Length	37 <sup>5</sup> / <sub>8</sub> "	96 cm
*Height - Above Crankshaft Centerline	20 <sup>7</sup> / <sub>16</sub> "	52 cm
Total Weight	970 lbs	440 kg

## STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Thru-Hub™ Exhaust	STD	STD
Transom Mounting	STD	STD
High Output Alternator	STD	STD
4-Anode Saltwater Protection	STD	STD
Hardened Alloy Steel Drive Shaft	STD	STD
19-Step Metal Preparation	STD	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	STD	STD
CobraSkin™ High-Solid Paint Finish	STD	STD
Hydraulic Shock Absorbers	STD	STD
Easy Access Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	NA	NA
Engine Oil Cooler	NA	NA
OMC 2-Year Owner Protection	STD	STD
OMC 1 + 2*Extended Protection Plan	OPT	OPT
Spitfire Electronic Eng. Manage. Sys.	STD	STD

\*Add 13<sup>3</sup>/<sub>16</sub>" / 34cm for height above anti-ventilation plate NA = Not Available



# STERN DRIVE SPECIFICATIONS

## ENGINE

5.8L EFI

	US	METRIC
Power (propshaft)	<b>255 hp</b>	190 kw
Displacement	<b>351 cu. in.</b>	5.8 L
Cylinders	<b>8</b>	8
Bore / Stroke	<b>4.00" x 3.50"</b>	102 mm x 89 mm
Compression Ratio	<b>8.8:1</b>	8.8:1
Main Bearings	<b>5</b>	5
Fuel System	<b>Multi-port fuel injection</b>	Multi-port fuel injection
Full Throttle Operating Range	<b>4200-4600 rpm</b>	4200-4600 rpm

## DRIVE UNIT

	Cone F-N-R	Cone F-N-R
Shift	<b>Cone F-N-R</b>	Cone F-N-R
Gear Ratio	<b>1.51:1</b>	1.51:1
Gear Ratio, High Altitude	<b>1.66:1</b>	1.66:1
Maximum Prop Diameter	<b>15<sup>1</sup>/<sub>2</sub>"</b>	39 cm

## DIMENSIONS

Length	<b>37<sup>5</sup>/<sub>8</sub>"</b>	96 cm
*Height - Above Crankshaft Centerline	<b>22"</b>	56 cm
Total Weight	<b>1060 lbs</b>	481 kg

## STANDARD / OPTIONAL FEATURES

Power Trim	<b>STD</b>	STD
Power Steering	<b>STD</b>	STD
Thru-Hub™ Exhaust	<b>STD</b>	STD
Transom Mounting	<b>STD</b>	STD
High Output Alternator	<b>STD</b>	STD
4-Anode Saltwater Protection	<b>STD</b>	STD
Hardened Alloy Steel Drive Shaft	<b>STD</b>	STD
19-Step Metal Preparation	<b>STD</b>	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	<b>STD</b>	STD
CobraSkin™ High-Solid Paint Finish	<b>STD</b>	STD
Hydraulic Shock Absorbers	<b>STD</b>	STD
Easy Access Water Pump	<b>STD</b>	STD
Stainless Steel Heli-Coil® Inserts	<b>STD</b>	STD
Counter Rotation	<b>STD</b>	STD
Remote Oil Filter	<b>NA</b>	NA
Engine Oil Cooler	<b>NA</b>	NA
OMC 2-Year Owner Protection	<b>STD</b>	STD
OMC 1 + 2® Extended Protection Plan	<b>OPT</b>	OPT
Spitfire Electronic Eng. Manage. Sys.	<b>STD</b>	STD

\*Add 13<sup>3</sup>/<sub>16</sub>" / 34cm for height above anti-ventilation plate NA = Not Available



# STERN DRIVE SPECIFICATIONS

## ENGINE

5.8LHO EFI

	US	METRIC
Power (propshaft)	<b>270 hp</b>	201 kw
Displacement	<b>351 cu. in.</b>	5.8 L
Cylinders	<b>8</b>	8
Bore / Stroke	<b>4.00" x 3.50"</b>	102 mm x 89 mm
Compression Ratio	<b>8.8:1</b>	8.8:1
Main Bearings	<b>5</b>	5
Fuel System	<b>Multi-port fuel injection</b>	Multi-port fuel injection
Full Throttle Operating Range	<b>4600-5000 rpm</b>	4600-5000 rpm

## DRIVE UNIT

	Cone F-N-R	Cone F-N-R
Shift	<b>Cone F-N-R</b>	Cone F-N-R
Gear Ratio	<b>1.51:1</b>	1.51:1
Gear Ratio, High Altitude	<b>1.60:1</b>	1.60:1
Maximum Prop Diameter	<b>15<sup>1</sup>/<sub>2</sub>"</b>	39 cm

## DIMENSIONS

Length	<b>37<sup>7</sup>/<sub>8</sub>"</b>	96 cm
*Height - Above Crankshaft Centerline	<b>22<sup>3</sup>/<sub>8</sub>"</b>	57 cm
Total Weight	<b>1060 lbs</b>	481 kg

## STANDARD / OPTIONAL FEATURES

Power Trim	<b>STD</b>	STD
Power Steering	<b>STD</b>	STD
Thru-Hub™ Exhaust	<b>STD</b>	STD
Transom Mounting	<b>STD</b>	STD
High Output Alternator	<b>STD</b>	STD
4-Anode Saltwater Protection	<b>STD</b>	STD
Hardened Alloy Steel Drive Shaft	<b>STD</b>	STD
19-Step Metal Preparation	<b>STD</b>	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	<b>STD</b>	STD
CobraSkin™ High-Solid Paint Finish	<b>STD</b>	STD
Hydraulic Shock Absorbers	<b>STD</b>	STD
Easy Access Water Pump	<b>STD</b>	STD
Stainless Steel Heli-Coil® Inserts	<b>STD</b>	STD
Counter Rotation	<b>STD</b>	STD
Remote Oil Filter	<b>STD</b>	STD
Engine Oil Cooler	<b>STD</b>	STD
OMC 2-Year Owner Protection	<b>STD</b>	STD
OMC 1 + 2*Extended Protection Plan	<b>OPT</b>	OPT
Spitfire Electronic Eng. Manage. Sys.	<b>STD</b>	STD

\*Add 13<sup>3</sup>/<sub>8</sub>" / 34cm for height above anti-ventilation plate NA = Not Available



# STERN DRIVE SPECIFICATIONS

## ENGINE

7.4L EFI

	US	METRIC
Power (propshaft)	<b>330 hp</b>	246 kw
Displacement	<b>454 cu. "</b>	7.4 L
Cylinders	<b>8</b>	8
Bore / Stroke	<b>4.25" x 4.00"</b>	108 mm x 102 mm
Compression Ratio	<b>8.4:1</b>	8.4:1
Main Bearings	<b>5</b>	5
Fuel System	<b>Multi-Port Fuel Injection</b>	Multi-Port Fuel Injection
Full Throttle Operating Range	<b>4200-4600 rpm</b>	4200-4600 rpm

## DRIVE UNIT

Shift	<b>Cone F-N-R</b>	Cone F-N-R
Gear Ratio	<b>1.42:1/1.63:1</b>	1.42:1/1.63:1
Gear Ratio, High Altitude	<b>NA</b>	NA
Maximum Prop Diameter	<b>15<sup>1</sup>/<sub>2</sub>"/17"</b>	39 cm/ 43 cm

## DIMENSIONS



Length	<b>38<sup>1</sup>/<sub>2</sub>"</b>	98 cm
*Height - Above Crankshaft Centerline	<b>21<sup>7</sup>/<sub>8</sub>"</b>	56 cm
Total Weight	<b>1200 lbs</b>	544 kg

## STANDARD / OPTIONAL FEATURES


Power Trim	<b>STD</b>	STD
Power Steering	<b>STD</b>	STD
Thru-Hub™ Exhaust	<b>STD</b>	STD
Transom Mounting	<b>STD</b>	STD
High Output Alternator	<b>STD</b>	STD
4-Anode Saltwater Protection	<b>STD</b>	STD
Hardened Alloy Steel Drive Shaft	<b>STD</b>	STD
19-Step Metal Preparation	<b>STD</b>	STD
Deep Guard™ Anti-Corrosive Alum. Alloy	<b>STD</b>	STD
CobraSkin™ High-Solid Paint Finish	<b>STD</b>	STD
Hydraulic Shock Absorbers	<b>STD</b>	STD
Easy Access Water Pump	<b>STD</b>	STD
Stainless Steel Heli-Coil® Inserts	<b>STD</b>	STD
Counter Rotation	<b>STD</b>	STD
Remote Oil Filter	<b>STD</b>	STD
Engine Oil Cooler	<b>STD</b>	STD
OMC 2-Year Owner Protection	<b>STD</b>	STD
OMC 1 + 2® Extended Protection Plan	<b>OPT</b>	OPT
Spitfire Electronic Eng. Manage. Sys.	<b>STD</b>	STD



# DIMENSIONAL DATA

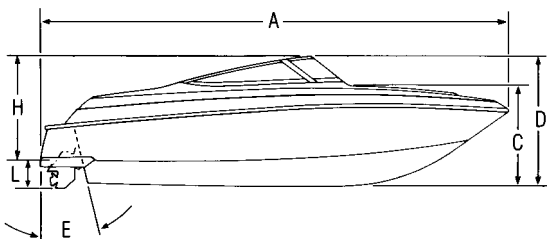

- A. LOA  
TRANSOM TO BOW
- B. BEAM
- C. KEEL TO W/S SHELF
- D. TOTAL HEIGHT
- E. TRANSOM ANGLE
- F. DEAD RISE
- G. OB TRANSOM HEIGHT
- H. BRIDGE CLEARANCE
- I. COCKPIT HEIGHT  
STERN
- J. COCKPIT  
HEIGHT HELM
- K. FREEBOARD
- L. DRAFT





# WINNING EDGE<sup>SM</sup>

## FOUR WINNS LIMITED ONE-YEAR BOAT OR TRAILER WARRANTY

1. Four Winns, Inc. hereinafter "FOUR WINNS," warrants each boat and trailer to be free from defects in material and workmanship for a period of twelve (12) months from date of delivery to original retail customer. This warranty does not apply to tires which are covered under a separate manufacturer's warranty. This warranty is transferable.
2. The Warranty Registration Card shall identify the product purchased by serial number and must be completed and returned to the factory **by the Dealer within ten (10) days of date of sale.**
3. Under this warranty, FOUR WINNS' obligation is limited, at FOUR WINNS' option, to repairing or replacing those boat/trailer parts that have become defective within the warranty period because of faulty materials or workmanship. FOUR WINNS may provide for the repair or replacement of any defective part at the FOUR WINNS dealership or service center. Optionally, FOUR WINNS may return the boat to the factory. All repairs under this warranty will be free of charge. Return transportation of any kind is to be paid for by the owner.
4. FOUR WINNS reserves the right to improve products and does not guarantee the availability of all product features and options as displayed in the FOUR WINNS catalog. FOUR WINNS further reserves the right to change specifications and prices without obligation to incorporate improvements in boats manufactured previous to such improvements or in trailers manufactured previous to such improvements.
5. If a boat or trailer or part should become defective within the warranty period, advance authorization by FOUR WINNS shall be necessary before any part is replaced or any defect is corrected by a service representative; otherwise FOUR WINNS shall not be liable for the expense of the replacement or correction.
6. In applying for authorization the repairing dealer shall supply to FOUR WINNS the following information: (A) owner's name and address, (B) boat or trailer serial number, (C) description of defect, (D) date of sale, (E) estimate of repairs.
7. Dealers are not agents of FOUR WINNS. FOUR WINNS does not authorize any person to create for it any other obligation or liability in connection with this boat or trailer.
8. ALL INCIDENTAL AND/OR CONSEQUENTIAL DAMAGES ARE EXCLUDED. IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PURPOSE ARE LIMITED TO THE DURATION OF THIS WARRANTY. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusions may not apply to you.

This warranty gives you specific legal rights and you may also have other legal rights which vary from state to state.

- continued -



# WINNING EDGE<sup>SM</sup>

## EXCLUSIONS FROM COVERAGE

The following items are excluded from coverage under this PLAN.

1. Gradual reduction in operating performance due to normal wear and tear.
2. Tear down and repair costs if it is established that the part or parts thought to be defective are not covered under this PLAN.
3. Any part which is covered by insurance or a manufacturer's warranty, or a breakdown which is a result of a mechanical defect that the manufacturer has acknowledged and/or will repair at its expense.
4. Failure of boat gel coat due to the following: chips and scratches not listed on freight damage report, fading, cracking, blistering or other cosmetic repairs before and after delivery.
5. Trailer paint due to the following: fading, peeling, chips, scratches or rusting attributed to shipping, handling or normal usage.
6. Improper setup of boat on trailer or modification of trailer to accommodate other manufacturer's boats. Normal maintenance of trailer brake system to include bleeding and adjusting brakes, and replacement of components due to normal usage. Replacement and maintenance of trailer pads and lighting systems.
7. Windshield breakage and adjustment, vinyl, upholstery and carpet.
8. Boat canvas including convertible tops and components, tonneau covers, and mooring covers. This will include adjustment of fit and snap replacement from normal usage.
9. Damage resulting from electrolysis or corrosion of any nature from any source.
10. Normal maintenance items to include rusting stainless steel parts, miscellaneous screw tightening, and decorative striping.
11. Any part failure caused by insufficient coolants or lubricants, fuel contamination, competitive driving or racing, or failure to service as recommended by the manufacturer.
12. Loss or damage which is the result of any accident, collision, theft, fire, freezing, vandalism, riot, explosion, lightning, earthquakes, windstorm, hail, water, flood, neglect, or abuse.
13. All of the following (unless required in connection with the repair or replacement of a covered part): Adjustments, engine tune-ups, seals, gaskets, oils, greases, other lubricants, valve grindings, spark plugs, and clamps.
14. Any part which has been modified or altered in any way from original factory specifications so as to adversely affect the performance, operation or durability of the part.

- continued -





# WINNING EDGE<sup>SM</sup>

- 15. Propellers, prop shafts, prop seals, outdrive water pumps, or damage to stern drive or hull if resulting from collision.
- 16. Demolding of wood materials from dry rot.
- 17. Any failure resulting from improper pre-delivery.

## **FOUR WINNS LIMITED FIVE-YEAR STRUCTURAL HULL WARRANTY**

FOUR WINNS warrants to original and subsequent purchasers each boat hull to be free from structural defects in material and workmanship for a period of sixty (60) months from the first retail sale.

Under this warranty, FOUR WINNS' obligation is limited, at FOUR WINNS' option, to repair or replace those hulls found defective during the warranty period. At no time shall repair or replacement cost exceed the retail market value of said boat at time of failure. Return transportation cost of any and all kinds will be paid for by the boat owner.

### **ITEMS TO WHICH WARRANTY DOES NOT APPLY**

\*Gel coats and/or paints for:

- A. Fading
- B. Discoloring
- C. Peeling
- D. Chipping
- E. Blistering
- F. Spider/hairline cracks that are only cosmetic in nature

\*Structural damage caused by:

- A. Improper trailer setup
- B. Inadequate or improper storage
- C. Repairs not authorized by FOUR WINNS
- D. Modification and/or alterations from original factory specifications
- E. Dry rotting and/or delaminated wood parts resulting from improper maintenance.

\*Boats used for commercial or competitive purposes.

ALL INCIDENTAL AND/OR CONSEQUENTIAL DAMAGES ARE EXCLUDED FROM THIS WARRANTY. IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PURPOSE ARE IN ANY EVENT LIMITED TO THE DURATION OF THIS WARRANTY.

Some states do not allow limitation on how long an implied warranty lasts or the exclusion on limitation of incidental or consequential damage, so the above limitations may not apply. This warranty gives you specific legal rights and you may also have other legal rights which vary from state to state.

- continued -



# WINNING EDGE<sup>SM</sup>

This warranty is transferable if boat is sold during the duration of the warranty and is not limited to original owner.

## GENERAL PROVISIONS

FOUR WINNS' responsibility in respect to this PLAN is limited to paying for repairs or replacements of a part or parts found to be defective in materials or workmanship, and no claims for breach of this PLAN will be cause for cancellation or rescission for the sale of PRODUCT.

Owner's registration card shall be presented to the dealer whenever owner requests service.

This PLAN is limited expressly to the terms and conditions herein set forth and cannot be modified or amended except by written agreement between FOUR WINNS and owner.

## FOUR WINNS LIMITED TWO-YEAR POWER TRAIN WARRANTY

(Excludes all Outboards or Turbojets)

This PLAN shall extend for twelve (12) months following the expiration of OMC's limited one-year warranty covering the factory-installed OMC power train only. The services of this PLAN will be carried out under the OMC 1+1 Extended Protection Plan. Please refer to the OMC 1+1 Extended Protection Plan provision as noted in their written warranty.

This PLAN is not offered on Outboard Turbojets models or engines that DO NOT carry a 12-month warranty from the original manufacturer nor commercially used boats.

This PLAN commences upon the expiration of the original manufacturer's warranty. The terms and conditions of this PLAN extend to the original and subsequent purchasers of the PRODUCT (subject to compliance with the transfer terms outlined above). **However, in no event shall the duration of this PLAN exceed twenty-four months from the first retail sale.**

## ADDITIONAL PROVISIONS TO FOUR WINNS WINNING EDGE WARRANTY

This PLAN does not provide coverage for:

1. Options or accessories not installed by FOUR WINNS.
2. Damages or failures due to inadequate or improper storage or lay up service.
3. Repair or replacements not authorized by the FOUR WINNS claim department.
4. Any boat or trailer used for commercial purposes including but not limited to hauling, transferring, chartering purposes, or governmental use.

- continued -



# WINNING EDGE<sup>SM</sup>

In no event shall FOUR WINNS be responsible to purchaser for INCIDENTAL, CONSEQUENTIAL, OR OTHER DAMAGES including, but not limited to expenses for gasoline, mechanic's travel time, telephone charges, towing charges, rental of like product while service is being performed, travel, lodging, loss or damage to personal property, loss of use of product, loss of time or inconvenience.

## TRANSFER OF THIS PLAN

All rights and terms of this PLAN may be transferred to new owners of the covered PRODUCT by the following method:

- A request for transfer must be made by the new owner in writing to FOUR WINNS.
- Send the former owner's plastic registration card, if available, along with a copy of the bill of sale and Fifty Dollars (\$50.00) to:  
FOUR WINNS, INC.  
4 Winn Way  
Cadillac, MI 49601  
Phone: 800 524-3794  
616 775-1343
- FOUR WINNS' issuance of a new owner's card is proof of acceptance of transfer.
- The new owner agrees to all items and conditions of the PLAN.
- Only the UNUSED portion of this PLAN will apply to the new owner.

## WHAT TO DO IN THE EVENT OF A CLAIM FOR SERVICE UNDER THIS PLAN

**Customer must return product to the original selling dealer.** If dealer is no longer selling the FOUR WINNS product or if customer has moved to another location, then customer should call FOUR WINNS for assistance to locate the nearest FOUR WINNS dealer in his/her area.

- Dealer will call and receive authorization number for repairs.
- Upon completion of repairs, customer to pay dealer any monies due for non-covered items.
- Purchaser assumes all liability for payment of non-authorized repairs.
- If unable to return to your selling dealer:  
Call the claims department at Four Winns, Cadillac, Michigan  
**Phone:** 800 524-3794  
616 775-1343

**IMPORTANT:** Do not agree to any repairs until dealer receives claim or authorization number!