

 **FOUR WINNS[®]**

FAST FACTS 2006

SPORT | DECK | CUDDY | CRUISER





TABLE OF CONTENTS

SPORTBOATS	PAGES
180 Horizon	4-7
183 Horizon F&S	8-11
190 Horizon	12-15
200 Horizon	16-19
203 Horizon F&S	20-23
210 Horizon	24-27
220 Horizon	28-31
240 Horizon	32-35
260 Horizon	36-39
290 Horizon	40-43
DECK BOATS	
204 Funship	46-49
224 Funship	50-53
244 Funship	54-57
274 Funship	58-61
CUDDYS	
215 Sundowner	64-67
255 Sundowner	68-71
CRUISERS	
248 Vista	74-77
258 Vista	78-81
278 Vista	82-85
288 Vista	86-89
318 Vista	90-93
328 Vista	94-97
348 Vista	98-101
378 Vista	102-105
TRAILER	
Horizon	106-122
Funship	123-126
Sundowner	127-128
Vista	129-131
IO SPECIFICATIONS	132-156
INBOARD SPECIFICATIONS	157-165
DIMENSIONAL DATA	167
WINNING EDGE	168-172

HORIZON™

S E R I E S



180 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	17'5"	5.33 m
Storage Length:	20'4"	6.20 m
Beam:	7'7"	2.34 m
Keel to W/S Shelf:	43"	1.09 m
Total Height:	4'7"	1.40 m
Total Height on Trailer:	6'2"	1.88 m
Transom Angle:	15°	15°
Deadrise:	21°	21°
Bridge Clearance:	3'8"	1.12 m
Cockpit Height (stern):	27"	69 cm
Cockpit Height (helm):	30"	76 cm
Freeboard (min.):	22"	56 cm
Draft (drive down):	34"	86 cm
Draft (drive up):	17"	41 cm
Fuel:	24 gal	91 L
Persons Capacity:	7	7
Maximum Capacity:	1150 lbs	522 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
MC3.0L/A	135	101	2310	1050
VP3.0GL/SX	135	101	2310	1050

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
180H	VP3.0 GL/SX	1640	670	40	140	150	755
KG							
180H	VP3.0 GL/SX	744	304	18	64	68	343

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC3.0L/A/135/101	14 1/2 x 19	37 x 48	AL	38-41	61-66	95	150
VP3.0GL/SX/135/101	14 1/4 x 21	36 x 53	AL	38-41	61-66	95	150

FUEL FLOW DATA - 180 HORIZON W/ VP3.0GL/SX & MC3.0L/A/135/101

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	3	11
2500	19	31	4	15
3000	26	42	5	19
3500	32	52	7	27
4000	37	60	10	38
WOT	40	64	12	46

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



180 HORIZON OPTIONS

HULL/DECK

- Graphics, sport

COCKPIT

- Carpet, cockpit, delete
- Cushions, bow fill-in
- Seat, flip-up bolster, pair
- Seat, flip-up bolster, starboard (NA w/SunSport)
- Seat, lounge, port (NA on SunSport)
- SunSport interior

HELM AREA

- Depth sounder
- Steering wheel, silver/sandstone

ENTERTAINMENT

- Stereo upgrade: Includes stereo remote w/display @ helm, four speakers and tweeters

CANVAS

- Bimini top
- Cockpit cover & forward cover
- Convertible top
- Forward cover (included w/full canvas)
- Full canvas (requires convertible top)
- Mooring cover

TRAILER

- Single axle
- Brakes, delete
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 3.0 GL/SX 135 hp

POWER MerCruiser

- 3.0L/Alpha 135 hp



FAST FACTS NOTES

183 HORIZON FISH N SKI

SPECIFICATIONS*

	US	METRIC
LOA:	18'0"	5.49 m
LOA w/Extended Swim Platform:	18'10"	5.74 m
Storage Length:	20'11"	6.38 m
Beam:	8'0"	2.44 m
Keel to W/S Shelf:	46"	1.17 m
Total Height:	5'0"	1.52 m
Total Height on Trailer:	6'7"	2.01 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
OB Transom Height:	25"	64 cm
Bridge Clearance:	3'9"	1.14 m
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	30"	76 cm
Freeboard (min.):	28"	71cm
Draft (drive down):	31"	79cm
Draft (drive up):	14"	36cm
Fuel:	32 gal	121 L
Persons Capacity:	8	8
Maximum Capacity:	1300 lbs	590 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	Propshaft Power KW	Boat & Engine Weights Lbs	Boat & Engine Weights KG
MC4.3L/A	190	142	2670	1210
VP4.3GL/SX	190	142	2710	1230
MC4.3MPI/A	220	164	2680	1220
VP4.3GXl/SX	225	167	2720	1230
MC5.0L/A	220	164	2760	1250
VP5.0GL/SX	220	164	2800	1270

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel Access.	Trail Wt.
LBS						
183H F&S	VP4.3 GL/SX	1830	880	40	192 150	960(S)/1075(T)
KG						
183H F&S	VP4.3 GL/SX	830	399	18	87 68	435(S)/488(T)

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC4.3L/A/190/142	13¹/₂ x 23	34 x 58	AL	48-51	77-82	125	201
VP4.3GL/SX/190/142	14¹/₄ x 23	36 x 58	AL	47-50	76-81	125	201
MC4.3MPI/A/220/164	14¹/₄ x 21	36 x 53	AL	50-53	81-85	125	201
VP4.3GXl/SX/225/167	14¹/₄ x 21	36 x 53	AL	49-52	79-84	125	201
MC5.0L/A/220/164	14¹/₄ x 21	36 x 53	AL	50-53	81-85	125	201
VP5.0GL/SX/220/164	14¹/₄ x 21	36 x 53	AL	49-52	79-84	125	201

FUEL FLOW DATA - 183 HORIZON F&S W/ VP4.3GL/SX & MC4.3L/A/190/142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	47	76	17	64
WOT	49	79	18	68

FUEL FLOW DATA - 183 HORIZON F&S W/ VP4.3GXl/SX & MC4.3MPI/A/225 & 220/167 & 164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	48	77	17	64
WOT	51	82	19	68

FUEL FLOW DATA - 183 HORIZON F&S W/ VP5.0GL/SX & MC5.0L/A/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	45	72	13	49
4500	49	79	17	64
WOT	51	82	19	72

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



183 HORIZON F&S OPTIONS

HULL/DECK

- Graphics, sport
- Swim platform, extended
- Trolling motor, delete

COCKPIT

- Carpet, cockpit, delete
- Bucket seats, ComfortRide, flip-up bolsters, adjustable

HELM AREA

- Steering wheel, woodgrain/sandstone

ENGINE/ SYSTEMS/DRIVE

- Remote oil filter (4.3L & 5.0L MerCruiser only - standard on all other engine models)

CANVAS

- Bimini top
- Cockpit cover
- Cockpit cover & forward cover
- Convertible top
- Full canvas (requires convertible top)
- Mooring cover

TRAILER

- Tandem axle trailer w/1 axle brake (Die cut logo in fender - painted model only)
- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 4.3 GL/SX 190 hp
- 4.3 GXi/SX 225 hp
- 5.0 GL/SX 220 hp

POWER MerCruiser

- 4.3L/Alpha 190 hp
- 4.3 MPI/Alpha 220 hp
- 5.0L/Alpha 220 hp



FAST FACTS NOTES

190 HORIZON

SPECIFICATIONS*

	US	METRIC
LOA:	18'6"	5.64 m
Storage Length:	19'10"	6.05 m
Beam:	7'11"	2.41 m
Keel to W/S Shelf:	45"	1.14 m
Total Height:	4'11"	1.50 m
Total Height on Trailer:	6'7"	2.01 m
Height on Trailer w/Wakeboard tower Dn:	7'6"	2.29 m
Height on Trailer w/Wakeboard tower Up:	10'0"	3.05 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	4'0"	1.22 m
Cockpit Height (stern):	23"	58 cm
Cockpit Height (helm):	29"	74 cm
Freeboard (min.):	26"	66 cm
Draft (drive down):	31"	79 cm
Draft (drive up):	14"	36 cm
Fuel:	34 gal	129 L
Persons Capacity:	8	8
Maximum Capacity:	1300 lbs	590 kg

* Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
MC4.3L/A	190	142	2610	1180
VP4.3GL/SX	190	142	2640	1200
MC4.3MPI/A	220	164	2620	1190
VP4.3GXi/SX	225	167	2650	1200

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
190H	VP4.3 GL/SX	1755	885	40	204	150	960(S)/1075(T)
KG							
190H	VP4.3 GL/SX	796	401	18	93	68	435(S)/488(T)

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC4.3L/A/190/142	13 1/2 x 23	34 x 58	AL	48-51	77-82	150	241
VP4.3GL/SX/190/142	14 1/4 x 23	36 x 58	AL	47-50	76-80	150	241
MC4.3MPI/A/220/164	14 1/4 x 21	36 x 53	AL	50-53	80-85	150	241
VP4.3GXi/SX/225/167	14 1/4 x 21	36 x 58	AL	49-53	79-84	150	241

FUEL FLOW DATA - 190 HORIZON W/ VP4.3GL/SX & MC4.3L/A/190/142

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	46	74	17	64
WOT	48	77	18	68

FUEL FLOW DATA - 190 HORIZON W/ VP4.3GXi/SX & MC4.3MPI/A/225/168 & 220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	48	77	17	64
WOT	51	82	19	72

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



190 HORIZON OPTIONS

OPTION PACKAGE

- Boater's Choice Package*
- Cleats, pull-up
- Depth sounder
- Graphics, sport
- Steering wheel, woodgrain/sandstone

HULL/DECK

- Cleats, pull-up*
- Graphics, sport*

GEL COAT

COLOR SCHEME

- Classic color band
- Two tone†
- All White†

COCKPIT

- Carpet, cockpit, delete
- Cushions, bow fill-in
- Seat, bucket, port
- Seat, flip-up bolster, pair
- Seat, flip-up bolster, star-board (NA w/SunSport)
- Seat, lounge, starboard
- SunSport interior
- Walk-thru doors

HELM AREA

- Depth sounder*
- Steering wheel, silver/sandstone*

ENTERTAINMENT

- Stereo upgrade: Includes stereo remote w/display @ helm, four speakers and tweeters

ENGINE/SYSTEMS/DRIVE

- Remote oil filter (4.3 MerCruiser) (standard on Volvo engines and MerCruiser fuel injected engines)

CANVAS

- Bimini top
- Cockpit cover & forward cover
- Convertible top
- Forward cover (included w/full canvas)
- Full canvas (requires convertible top)
- Mooring cover

TRAILER

- Tandem axle w/1 axle brake (Die cut logo in fender, painted trailer only)
- Brakes, tandem

- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheels, aluminum

POWER Volvo Penta

- 4.3 GL/SX 190 hp
- 4.3 GXi/SX 225 hp

POWER MerCruiser

- 4.3L/Alpha 190 hp
- 4.3 MPI/Alpha 220 hp

* Included in Optional Boater's Package

† Standard



FAST FACTS NOTES

200 HORIZON

SPECIFICATIONS*

	US	METRIC
LOA:	19'8"	6.00 m
Storage Length:	21'5"	6.53 m
Beam:	8'4"	2.54 m
Keel to W/S Shelf:	47"	1.19 m
Total Height:	5'1"	1.55 m
Total Height on Trailer:	6'6"	1.98 m
Height on Trailer w/Wakeboard tower Dn:	7'6"	2.32 m
Height on Trailer w/Wakeboard tower Up:	10'0"	3.05 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	3'8"	1.12 m
Cockpit Height (stern):	26"	66 cm
Cockpit Height (helm):	29"	74 cm
Freeboard (min.):	27"	69 cm
Draft (drive down):	32"	81 cm
Draft (drive up):	15"	38 cm
Fuel:	35 gal	132 L
Persons Capacity:	8	8
Maximum Capacity:	1400 lbs	635 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	KW	Boat & Engine Weights Lbs	KG
MC4.3L/A	190	142	2920	1330
VP4.3GL/SX	190	142	2960	1350
MC4.3MPI/A	220	164	2930	1230
VP4.3GXl/SX	225	167	2970	1350
MC5.0L/A	220	164	3020	1370
VP5.0GL/SX	220	164	3060	1390
MC5.0MPI/A	260	194	3030	1375
VP5.0GXl/SX	270	201	3070	1400

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
200H	VP4.3 GXl/SX	2060	907	40	210	150	930(S)/1160(T)
KG							
200H	VP4.3 GXl/SX	934	411	18	95	68	422(S)/526(T)

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch) IN	CM	Type	Top Speed MPH	KPH	Cruise Range MI	KM
MC4.3L/A/190/142	13½ x 23	34 x 58	AL	47-50	76-81	135	217
VP4.3GL/SX/190/142	14¼ x 23	36 x 58	AL	46-49	74-79	135	217
MC4.3MPI/A/220/164	14¼ x 21	36 x 53	AL	50-53	81-85	135	217
VP4.3GXl/SX/225/167	14¼ x 21	36 x 58	AL	49-52	79-84	135	217
MC5.0L/A/220/164	14¼ x 21	36 x 53	AL	50-53	81-85	135	217
VP5.0GL/SX/220/164	14¼ x 21	36 x 53	AL	49-52	79-84	135	217
MC5.0MPI/A/260/194	14¼ x 21	36 x 53	AL	52-55	84-89	140	225
VP5.0GXl/SX/270/201	14¼ x 21	36 x 53	AL	51-54	82-87	140	225

FUEL FLOW DATA - 200 HORIZON W/ VP4.3GL/SX & MC4.3L/A/190/142

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	46	74	17	64
WOT	48	77	18	68

FUEL FLOW DATA - 200 HORIZON W/ VP4.3GXl/SX & MC4.3MPI/A/225/168 & 220/164

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	48	77	17	64
WOT	51	82	19	72

FUEL FLOW DATA - 200 HORIZON W/ VP5.0GL/SX & MC5.0L/A/220/164

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	45	72	13	49
4500	49	79	17	64
WOT	51	82	19	72



FUEL FLOW DATA - 200 HORIZON W/ VP5.0GX1/SX & MC5.0MPI/A/270/201 & 260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	33	53	8	30
3500	39	63	10	38
4600	46	74	14	53
4500	50	81	19	72
WOT	53	85	22	83

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.

200 HORIZON OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Graphics, sport
- Wakeboard tower w/ custom bimini top
- Wakeboard tower, Deluxe: Tower, bimini top, 2 board racks, 2 tower speakers, Clarion amplifier and 10" woofer
- Wakeboard tower board racks (2)

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[‡]
- All White[‡]

COCKPIT

- Carpet, cockpit delete
- Cushions, bow fill-in
- Seat, flip-up bolster, port
- Seat lounger, starboard (NA w/SunSport)
- SunSport interior (w/2 bolsters)
- Table w/mount
- Walk-thru door

HELM AREA

- Compass
- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

ENGINE/ SYSTEMS/DRIVE

- Prop, stainless exchange
- Remote oil filter (4.3L & 5.0 MerCruiser; standard on all other engines)

CANVAS

- Cockpit cover
- Cockpit cover & forward cover
- Convertible top*
- Full canvas (requires convertible top)*
- Mooring cover*

TRAILER

- Tandem axle w/1 axle brake (Die cut logo in fender, painted trailer only)
- Brakes, tandem
- Galvanized trailer w/GatorHyde™

- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 4.3 GL/SX 190 hp
- 4.3 GXI/SX 225 hp
- 5.0 GL/SX 220 hp
- 5.0 GXI/SX 270 hp

POWER MerCruiser

- 4.3L/Alpha 190 hp
- 4.3 MPI/Alpha 220 hp
- 5.0L/Alpha 220 hp
- 5.0 MPI/Alpha 260 hp

* NA w/wakeboard tower

‡ Standard

200 four winns horizon SS



LOA	BEAM	DEADRISE	DRAFT – DRIVE DOWN	FUEL CAPACITY	MAX. CAPACITY	APPROX. BOAT & ENGINE WEIGHT	TRAILER WEIGHT
19'8" 6.00 M	8'4" 2.54 M	19°	32" 81 CM	35 GAL 132 L	1,400 LBS 635 KG	2,930-3,070 LBS 1,330-1,400 KG	930 TO 1,160 LBS 422 TO 526 KG

210 four winns horizon SS



LOA	BEAM	DEADRISE	DRAFT – DRIVE DOWN	FUEL CAPACITY	MAX. CAPACITY	APPROX. BOAT & ENGINE WEIGHT	TRAILER WEIGHT
20'10" 6.35 M	8'6" 2.59 M	19°	33" 84 CM	40 GAL 151 L	1,600 LBS 726 KG	3,250-3,330 LBS 1,410-1,510 KG	1,160 LBS 526 KG

203 HORIZON FISH N SKI

SPECIFICATIONS*

	US	METRIC
LOA:	19'6"	5.95 m
LOA w/Extended Swim Platform:	21'2"	6.45 m
Storage Length:	21'9"	6.63 m
Beam:	8'5"	2.57 m
Keel to W/S Shelf:	46"	1.17 m
Total Height:	4'11"	1.50 m
Total Height on Trailer:	6'7"	2.01 m
Height on Trailer w/Wakeboard tower Dn:	7'8"	2.34 m
Height on Trailer w/Wakeboard tower Up:	10'2"	3.10 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	3'9"	1.14 m
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	29"	74 cm
Freeboard (min.):	26"	66 cm
Draft (drive down):	32"	81 cm
Draft (drive up):	15"	38 cm
Fuel:	42 gal	159 L
Persons Capacity:	9	9
Maximum Capacity:	1600 lbs	726 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	KW	Boat & Engine Weights LBS	KG
MC4.3L/A	190	142	3200	1450
VP4.3GL/SX	190	142	3240	1470
MC4.3MPI/A	220	164	3230	1470
VP4.3GX/SX	225	167	3270	1480
MC5.0L/A	220	164	3300	1500
VP5.0GL/SX	220	164	3340	1510
MC5.0MPI/A	260	194	3310	1500
VP5.0GX/SX	270	201	3350	1520

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
203H F&S	VP5.0GL/SX	2360	984	40	252	150	930(S)/1160(T)
KG							
203H F&S	VP5.0GL /SX	1070	446	18	114	68	422(S)/526(T)

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch) IN	CM	Type	Top Speed MPH	KPH	Cruise Range MI	KM
MC4.3L/A/190/142	13'1/2 x 23	34 x 58	AL	46-49	74-79	140	225
VP4.3GL/SX/190/142	14'1/4 x 23	36 x 58	AL	46-49	74-79	140	225
MC4.3MPI/A/220/164	14'1/4 x 21	36 x 53	AL	49-52	79-84	145	233
VP4.3GX/SX/225/167	14'1/4 x 21	36 x 58	AL	48-51	77-82	145	233
MC5.0L/A/220/164	14'1/4 x 21	36 x 53	AL	49-52	79-84	135	217
VP5.0GL/SX/220/164	14'1/4 x 21	36 x 53	AL	48-51	77-82	135	217
MC5.0MPI/A/260/194	14'1/4 x 21	36 x 53	AL	52-55	84-89	140	225
VP5.0GX/SX/270/201	14'1/4 x 21	36 x 53	AL	51-54	82-87	140	225

FUEL FLOW DATA - 203 HORIZON F&S W/ VP4.3GL/SX & MC4.3L/A/190/142

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	36	28	10	38
4000	42	68	14	53
WOT	47	76	18	68

FUEL FLOW DATA - 203 HORIZON F&S W/ VP4.3GX/SX & MC4.3MPI/A/225/167 & 220/164

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	9	34
4000	42	68	12	45
4500	47	76	16	60
WOT	50	81	19	72

FUEL FLOW DATA - 203 HORIZON F&S W/ VP5.0GL/SX & MC5.0L/A/220/164

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	43	72	13	49
4500	48	79	17	64
WOT	50	82	19	72



FUEL FLOW DATA - 203 HORIZON F&S W/ VP5.0GX/SX & MPI/A/270/201 & 260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	46	74	14	53
4500	51	82	19	72
WOT	53	85	22	83

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



203 HORIZON F&S OPTIONS

HULL/DECK

- Graphics, sport
- Swim platform, extended
- Trolling motor, delete
- Wakeboard tower w/ custom bimini top
- Wakeboard tower board racks (2)

GEL COAT

COLOR SCHEME

- Two tone[‡]
- All White[‡]

COCKPIT

- Bucket seats, ComfortRide, flip-up bolsters, adjustable
- Carpet, cockpit, delete
- Table w/mount
- Walk-thru door

HELM AREA

- Steering wheel, woodgrain/sandstone

ENGINE/ SYSTEMS/DRIVE

- Hour meter
- Prop, stainless exchange
- Remote oil filter (4.3L & 5.0L MerCruiser only - standard on all other engine models)

CANVAS

- Bimini top*
- Cockpit cover*
- Cockpit cover & forward cover
- Convertible top*
- Full canvas (requires convertible top)*
- Mooring cover*

TRAILER

- Tandem axle trailer w/1 axle brake (Die cut logo in fender - painted model only)
- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum (each)

POWER Volvo Penta

- 4.3 GL/SX 190 hp
- 4.3 GXi/SX 225 hp
- 5.0 GL/SX 220 hp
- 5.0GXi/SX 270 hp

POWER MerCruiser

- 4.3L/Alpha 190 hp
- 4.3 MPI/Alpha 220 hp
- 5.0L/Alpha 220 hp
- 5.0 MPI/Alpha 260 hp

* NA w/wakeboard tower

[‡] Standard

210 HORIZON

SPECIFICATIONS*

	US	METRIC
LOA:	20'10"	6.35 m
Storage Length:	22'0"	6.71 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	49"	1.24 m
Total Height:	5'4"	1.63 m
Height on Trailer:	7'1"	2.16 m
Height on Trailer w/Wakeboard tower Dn:	7'8"	2.34 m
Height on Trailer w/Wakeboard tower Up:	10'2"	3.10 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	3'9"	1.14 m
Cockpit Height (stern):	29"	74 cm
Cockpit Height (helm):	33"	84 cm
Freeboard (min.):	29"	74 cm
Draft (drive down):	33"	84 cm
Draft (drive up):	16"	41 cm
Fuel:	40 gal	151 L
Persons Capacity:	9	9
Maximum Capacity:	1600 lbs	726 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft HP	Power KW	Boat & Engine Weights Lbs	KG
MC4.3MPI/A	220	164	3170	1440
VP4.3GXi/SX	225	167	3210	1460
MC5.0L/A	220	164	3250	1470
VP5.0GL/SX	220	164	3250	1470
MC5.0MPI/A	260	194	3250	1470
VP5.0GXi/SX	270	201	3330	1510
VP5.7Gi/SX	280	209	3330	1510
MC350MPI/B1	300	224	3320	1510

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
210H	VP5.0 GXi/SX	2300	1030	40	240	150	1160
KG							
210H	VP5.0 GXi/SX	1043	468	18	109	68	526

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch) IN	CM	Type	Top Speed MPH	KPH	Cruise Range MI	KM
MC4.3MPI/A/220/164	14¹/₄ x 21	36 x 53	AL	49-52	79-84	125	201
VP4.3GXi/SX/225/167	14¹/₄ x 21	36 x 53	AL	48-51	77-82	125	201
MC5.0L/A/220/164	14¹/₄ x 21	36 x 53	AL	49-52	79-84	125	201
VP5.0GL/SX/220/164	14¹/₄ x 21	36 x 53	AL	48-51	77-82	125	201
MC5.0MPI/A/260/194	14¹/₄ x 21	36 x 53	AL	52-55	84-89	125	201
VP5.0GXi/SX/270/201	14¹/₄ x 21	36 x 53	AL	51-54	82-87	125	201
VP5.7Gi/SX/280/209	14³/₄ x 21	37 x 53	SST	53-56	85-90	125	201
MC350MPI/B1/260/194	14³/₄ x 21	37 x 53	SST	54-57	87-92	125	201

FUEL FLOW DATA - 210 HORIZON W/ VP4.3GXi/SX & MC4.3MPI/A/225/167 & 220/164

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	11	18	4	15
2500	23	37	5	19
3000	29	47	7	26
3500	37	60	10	38
4000	42	68	13	49
4500	47	76	17	64
WOT	50	80	19	68

FUEL FLOW DATA - 210 HORIZON W/ VP5.0GL/SX & MC5.0L/A/220/164

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	43	72	13	49
4500	48	79	17	64
WOT	50	82	19	72

FUEL FLOW DATA - 210 HORIZON W/ VP5.0GXi/SX & MC5.0MPI/A/270/201 & 260/194

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	9	15	5	11
2500	28	42	6	19
3000	32	52	8	30
3500	38	61	10	38
4000	46	74	14	53
4500	51	82	19	72
WOT	53	85	22	83



FUEL FLOW DATA - 210 HORIZON W/VP5.7Gi/SX/280/209 & MC350MPI/B1/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	43	8	30
3000	34	55	10	38
3500	40	64	13	49
4000	45	72	17	64
4500	51	82	21	80
WOT	55	89	23	87

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



210 HORIZON OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Graphics, sport
- Wakeboard tower w/ custom bimini top
- Wakeboard tower, Deluxe: Tower, bimini top, 2 board racks, 2 tower speakers, Clarion amplifier and 10" woofer
- Wakeboard tower board racks (2)

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[‡]
- All White[‡]

COCKPIT

- Carpet, cockpit, delete
- Cushions, bow fill-in
- Seat, flip-up bolster, port
- Seat lounger, starboard (NA w/SunSport)
- SunSport interior (w/2 bolsters)
- Table w/mount
- Walk-thru door

HELM AREA

- Compass
- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo upgrade: Includes Clarion[®] amplifier, 10" subwoofer and tweeters

ENGINE/ SYSTEMS/DRIVE

- Prop, stainless exchange
- Remote oil filter (4.3L & 5.0 Merc; standard on all other engines)
- Exhaust, thru-side, Quick & Quiet (NA w/Merc engines)

CANVAS

- Cockpit cover
- Cockpit cover & forward cover
- Convertible top*
- Full canvas (requires convertible top)*
- Mooring cover*

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 4.3 GL/SX 190 hp
- 4.3 GXi/SX 225 hp
- 5.0 GL/SX 220 hp
- 5.0 GXi/SX 270 hp
- 5.7 Gi/SX 280 hp

POWER MerCruiser

- 4.3L/Alpha 190 hp
- 4.3 MPI/Alpha 220 hp
- 5.0L/Alpha 220 hp
- 5.0 MPI/Alpha 260 hp
- 350 MPI/Bravo I 300 hp

* NA w/wakeboard tower

‡ Standard

220 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	22'0"	6.71 m
Storage Length:	23'1"	7.04 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	53"	1.35 m
Total Height:	5'7"	1.70 m
Total Height on Trailer:	7'3"	2.21 m
Height on Trailer w/Wakeboard tower Dn:	7'8"	2.34 m
Height on Trailer w/Wakeboard tower Up:	10'9"	3.28 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	4'6"	1.37 m
Cockpit Height (stern):	32"	81 cm
Cockpit Height (helm):	32"	81 cm
Freeboard (min.):	27"	69 cm
Draft (drive down):	33"	84 cm
Draft (drive up):	16"	41 cm
Fuel:	50 gal	189 L
Persons Capacity:	10	10
Maximum Capacity:	1800 lbs	816 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	KW	Boat & Engine Weights Lbs	KG
MC5.0MPI/B1	260	194	3870	1760
VP5.0GXi/SX	270	201	3910	1770
VP5.0GXi/DP	270	201	3920	1780
VP5.00Si/XDP	270	201	3870	1760
VP5.7Gi/SX	280	209	3910	1770
VP5.7Gi/DP	280	209	3920	1780
VP5.70Si/XDP	280	209	3870	1760
MC350MPI/B1	300	224	3870	1760
MC350MPI/B3	300	224	3900	1780
VP5.7GXi/SX	320	239	3910	1770
VP5.7GXi/DP	320	239	3920	1780
VP5.70SXi/XDP	320	239	3870	1760
MCMX6.2/B1	320	239	3870	1760
MCMX6.2/B3	320	239	3900	1770

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng. Battery	Fuel	Access.	Trail Wt.
LBS						
220H	VP5.7 Gi/SX	2880	1030	60	300	150
KG						
220H	VP5.7Gi/SX	1306	467	27	136	68

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch) IN CM	Type	Top Speed MPH KPH	Cruise Range MI KM
MC5.0MPI/B1/260/194	15¹/₄ x 19	39 x 48 SST	44-47 71-76	140 225
VP5.0GXi/SX/270/201	14¹/₂ x 19	37 x 48 AL	44-47 71-76	140 225
VP5.0GXi/DP/270/201	F5	F5 SST	45-48 72-77	140 225
VP5.00Si/XDP/270/201	F5	F5 SST	44-47 71-76	140 225
VP5.7Gi/SX/280/209	14³/₄ x 19	37 x 48 SST	47-50 76-81	140 225
VP5.7Gi/DP/280/209	F5	F5 SST	47-50 76-81	140 225
VP5.70Si/XDP/280/209	F5	F5 SST	46-49 74-79	140 225
MC350MPI/B1/300/224	15¹/₄ x 19	39 x 48 SST	48-51 77-82	140 225
MC350MPI/B3/300/224	26	66 SST	47-50 77-82	140 225
VP5.7GXi/SX/320/239	14³/₄ x 19	37 x 48 SST	49-52 79-84	140 225
VP5.7GXi/DP/320/239	F6	F6 SST	49-52 79-84	140 225
VP5.70SXi/XDP/320/239	F5	F5 SST	47-50 77-82	140 225
MCMX6.2/B1/320/239	15¹/₄ x 19	39 x 48 SST	49-52 79-84	140 225
MCMX6.2/B3/320/239	26	66 SST	48-51 77-82	140 225

FUEL FLOW DATA - 220 HORIZON W/ VP5.0GXi/SX/270/201 & MC5.0MPI/A/B1/260/194

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	6	23
2500	25	40	7	27
3000	30	48	9	34
3500	35	56	12	45
4000	39	63	17	64
4500	43	69	20	76
WOT	46	74	21	80

FUEL FLOW DATA - 220 HORIZON W/ VP5.0GXi/DP & 5.00Si/XDP/270/201

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	6	23
2500	26	42	7	27
3000	32	52	9	34
3500	37	60	12	45
4000	40	64	17	64
4500	44	71	20	76
WOT	47	76	21	80



FUEL FLOW DATA - 220 HORIZON W/ 5.7Gi/SX/280/209 & MC350MPI/B1/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	43	8	30
3000	32	52	10	38
3500	38	61	13	49
4000	41	66	17	64
4500	46	74	21	80
WOT	49	79	23	87

FUEL FLOW DATA - 220 HORIZON W/ 5.7Gi/DP & 5.7OSi/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	43	8	30
3000	35	56	10	38
3500	41	66	14	53
4000	44	71	18	68
4500	47	76	21	80
WOT	49	79	23	87

FUEL FLOW DATA - 220 HORIZON W/ 5.7GXi/SX/320/239 & MCMX6.2/B1/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	43	8	30
3000	33	53	10	38
3500	39	63	14	53
4000	42	68	18	68
4500	48	77	21	80
WOT	51	82	24	91

FUEL FLOW DATA - 220 HORIZON W/ 5.7GXi/DP & 5.7OSi/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	6	23
2500	27	43	8	30
3000	35	56	10	38
3500	42	68	14	53
4000	45	72	18	68
4500	49	79	21	80
WOT	51	82	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



220 HORIZON OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Docking lights
- Graphics, sport
- Wakeboard tower w/ custom bimini top
- Wakeboard tower, Deluxe: Tower, bimini top, 2 board racks, 2 tower speakers, Clarion amplifier and 10" woofer
- Wakeboard tower board racks (2)
- Windshield wiper, starboard

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone†
- All White†

COCKPIT

- Carpet, cockpit, delete
- Cushions, bow fill-in
- Engine hatch, electric lift
- Table w/mount

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

* NA w/MerCruiser; standard w/Ocean Series

† NA w/wakeboard tower

‡ Standard

ENGINE/ SYSTEMS/DRIVE

- Batteries, dual w/switch
- Engine flush-out (NA w/Neutra-Salt system)
- Exhaust, thru-side, Quick & Quiet (NA w/Merc engines)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Neutra-Salt system*
- Prop, stainless exchange (5.0 GXi/SX only)

CANVAS

- Cockpit cover
- Cockpit & forward cover
- Convertible top w/bimini†
- Full canvas (req. convertible top†)
- Mooring cover†
- Windshield connector - clear†

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes

- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 5.0 GXi/SX 270 hp
- 5.0 GXi/DP 270 hp
- 5.0 OSi/XDP 270 hp
- 5.7 Gi/SX 280 hp
- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/SX 320 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320

POWER MerCruiser

- 5.0 MPI/Bravo I 260 hp
- 350 MPI/Bravo I 300 hp
- 350 MPI/Bravo III 300 hp
- MX 6.2/Bravo I 320 hp
- MX 6.2/Bravo III 320 hp

240 HORIZON

SPECIFICATIONS*

	US	METRIC
LOA:	24'0"	7.32 m
Storage Length:	24'0"	7.32 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	54"	1.37 m
Total Height:	6'2"	1.88 m
Total Height on Trailer:	8'0"	2.44 m
Height on Trailer w/Wakeboard tower Dn:	8'4"	2.54 m
Height on Trailer w/Wakeboard tower Up:	10'11"	3.33 m
Transom Angle:	15°	15°
Deadrise:	20°	20°
Bridge Clearance:	5'0"	1.52 m
Cockpit Height (stern):	30"	76 cm
Cockpit Height (helm):	31"	79 cm
Freeboard (min.):	29"	74 cm
Draft (drive down):	35"	89 cm
Draft (drive up):	17"	43 cm
Fuel:	58 gal	220 L
Potable Water:	12 gal	45 L
Holding:	2.6 gal	9.8 L
Persons Capacity:	11	11
Maximum Capacity:	2000 lbs	907 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	Propshaft Power KW	Boat & Engine Weights Lbs	Boat & Engine Weights KG
MC5.0MPI/B1	260	194	4280	1940
MC5.0MPI/B3	260	194	4310	1950
VP5.0GX/SX	270	201	4320	1960
VP5.0GX/DP	270	201	4330	1960
VP5.00Si/XDP	270	201	4280	1940
VP5.7Gi/SX	280	209	4320	1960
VP5.7Gi/DP	280	209	4330	1960
VP5.70Si/XDP	280	209	4280	1940
MC350MPI/B1	300	224	4280	1940
MC350MPI/B3	300	224	4310	1950
VP 5.7GX/SX	320	239	4320	1960
VP 5.7GX/DP	320	239	4330	1960
VP 5.70Si/XDP	320	239	4280	1940
MCMX6.2/B1	320	239	4280	1940
MCMX6.2/B3	320	239	4310	1960

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
240H	VP 5.7 GXI/DP	3290	1040	60	300	150	1440
KG							
240H	VP 5.7 GXI/DP	1492	471	27	136	68	653

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch) IN CM	Type	Top Speed MPH	KPH	Cruise Range MI	KM
MC5.0MPI/B1/260/194	15 1/2 x 17	39 x 43 SST	42-45	68-72	130	210
MC5.0MPI/B3/260/194	24	61 SST	42-45	68-72	130	210
VP 5.0GX/SX/270/201	15 x 17	38 x 43 AL	41-44	66-71	130	210
VP 5.0GX/DP/270/201	F4	F4 SST	43-46	69-74	135	220
VP 5.00Si/XDP/270/201	F4	F4 SST	42-45	68-72	130	210
VP 5.7Gi/SX/280/209	14 3/4 x 17	37 x 43 SST	46-49	74-79	130	210
VP 5.7Gi/DP/280/209	F5	F5 SST	47-50	76-81	135	220
VP 5.70Si/XDP/280/209	F5	F5 SST	46-49	74-79	130	210
MC350MPI/B1/300/224	15 1/4 x 19	39 x 43 SST	47-50	76-81	130	210
MC350MPI/B3/300/224	26	66 SST	46-49	74-79	130	210
VP 5.7GX/SX/320/239	14 3/4 x 19	37 x 43 SST	48-51	77-82	130	210
VP 5.7GX/DP/320/239	F5	F5 SST	48-51	77-82	135	220
VP 5.70Si/XDP/320/239	F5	F5 SST	47-50	74-81	130	210
MCMX6.2/B1/320/239	15 1/4 x 19	39 x 43 SST	48-51	77-82	130	210
MCMX6.2/B3/320/239	26	66 SST	47-50	74-81	130	210

FUEL FLOW DATA - 240 HORIZON W/ VP5.0GX/SX/270/201 & MC5.0MPI/B1/260/194

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	26	42	9	34
3500	33	53	10	38
4000	37	60	14	53
4500	41	66	18	68
WOT	43	69	21	80

FUEL FLOW DATA - 240 HORIZON W/ VP5.0GX/DP, 5.00Si/XDP/270/201 & MC5.0MPI/B3/260/194

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	6	23
2500	20	33	7	27
3000	28	45	9	34
3500	32	52	10	38
4000	38	61	14	53
4500	41	66	18	68
WOT	44	71	21	80



FUEL FLOW DATA - 240 HORIZON W/ VP5.7Gi/SX/280/209 & MC350MPI/B1/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	27	43	9	34
3500	35	56	11	42
4000	39	63	15	57
4500	45	72	19	72
WOT	48	77	23	87

FUEL FLOW DATA - 240 HORIZON W/ VP5.7Gi/DP/280/209, 5.7OSi/XDP & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	6	23
2500	21	34	7	27
3000	28	45	9	34
3500	36	58	11	42
4000	41	66	15	57
4500	46	74	19	72
WOT	48	77	23	87

FUEL FLOW DATA - 240 HORIZON W/ VP5.7GXi/SX/320/239 & MCMX6.2/B1/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	13	21	8	30
3000	26	42	10	38
3500	31	50	12	45
4000	39	63	17	64
4500	45	72	21	79
WOT	49	79	24	91

FUEL FLOW DATA - 240 HORIZON W/ VP5.7GXi/DP/320/239, VP5.7OSXi/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	6	23
2500	21	34	8	30
3000	28	45	10	38
3500	34	55	12	45
4000	40	64	17	64
4500	46	74	21	79
WOT	49	79	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



240 HORIZON OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Docking lights
- Graphics, sport
- Ski pylon, removable
- Wakeboard tower w/ custom bimini top
- Wakeboard tower, Deluxe: Tower, bimini top, 2 board racks, 2 lower speakers, Clarion amplifier and 10" woofer
- Wakeboard tower board racks (2)
- Windshield wiper, starboard

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[†]
- All White[‡]

COCKPIT

- Carpet, cockpit, delete
- Cushions, bow fill-in
- Engine hatch, electric lift
- Head, pumpout (Porta-potti standard)
- Table w/mount

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion[®] amplifier, 10" subwoofer and tweeters

ENGINE/ SYSTEMS/DRIVE

- Batteries, dual w/switch
- Engine flush-out (NA w/Neutra-Salt system)
- Exhaust, thru-side, Quick & Quiet (NA w/Merc engines)
- Fire extinguishing system
- Neutra-Salt system^{*}
- Prop, stainless exchange (5.0 GXi/SX only)

CANVAS

- Camper canvas[†]
- Cockpit cover
- Cockpit & forward cover
- Mooring cover[†]
- Windshield connector - clear[†]

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 5.0 GXi/SX 270 hp
- 5.0 GXi/DP 270 hp
- 5.0 OSi/XDP 270 hp
- 5.7 Gi/SX 280 hp
- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320 hp

POWER MerCruiser

- 5.0 MPI/Bravo I 260 hp
- 5.0 MPI/Bravo III 260 hp
- 350 MPI/Bravo I 300 hp
- 350 MPI/Bravo III 300 hp
- MX 6.2/Bravo I 320 hp
- MX 6.2/Bravo III 320 hp

* NA w/MerCruiser; standard w/Ocean Series

† NA w/wakeboard tower

‡ Standard

260 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	26'0"	7.93 m
Storage Length:	26'0"	7.93 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	58"	1.47 m
Total Height:	6'4"	1.93 m
Total Height on Trailer:	7'11"	2.41 m
Height on Trailer w/Wakeboard tower Dn:	8'8"	2.64 m
Height on Trailer w/Wakeboard tower Up:	11'4"	3.45 m
Transom Angle:	15°	15°
Deadrise:	20°	20°
Bridge Clearance:	5'4"	1.63 m
Cockpit Height (stern):	32"	81 cm
Cockpit Height (helm):	34"	86 cm
Freeboard (min.):	36"	90 cm
Draft (drive down):	36"	91 cm
Draft (drive up):	19"	48 cm
Fuel:	75 gal	284 L
Potable Water:	12 gal	45 L
Holding:	2.6 gal	9.8 L
Persons Capacity:	14	14
Maximum Capacity:	Yacht	Yacht

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft HP	Power KW	Boat & Engine Weights Lbs	KG
VP5.7Gi/DP	280	209	4700	2130
VP5.7OSi/XDP	280	209	4640	2100
MC350MPI/B3	300	224	4680	2120
VP5.7GXi/DP	320	239	4700	2130
VP5.7OSXi/XDP	320	239	4640	2100
MCMX6.2/B3	320	239	4680	2120
MC496MG/B1	375	280	4860	2200
MC496MG/B3	375	280	4890	2220
VP8.1 Gi/DP	375	280	4920	2230
VP8.1 OSi/XDP	375	280	4890	2220

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng. Battery	Fuel	Access.	Trail Wt.
LBS						
260H	VP 8.1Gi/DP	3660	1260	60	450	200
KG						
260H	VP 8.1Gi/DP	1660	572	32	204	90

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch) IN	Type	Top Speed MPH	KPH	Cruise Range MI	KM
VP5.7Gi/DP/280/209	F5	F5 SST	45-48	72-77	190	310
VP5.7OSi/XDP/280/209	F5	F5 SST	44-47	71-76	190	310
MC350MPI/B3/300/224	26	66 SST	45-48	72-77	180	290
VP5.7GXi/DP/320/239	F5	F5 SST	47-50	76-80	190	310
VP5.7OSXi/XDP/320/239	F5	F5 SST	46-49	74-79	190	310
MCMX6.2/B3/320/239	26	66 SST	46-49	74-79	180	290
MC496MG/B1/375/280	14³/4 x 21	37 x 53 SST	52-55	84-89	180	290
MC496MG/B3/375/280	26	66 SST	51-54	82-87	180	290
VP8.1Gi/DP/375/280	F6	F6 SST	52-55	84-89	180	290
VP8.1OSi/XDP/375/280	F6	F6 SST	51-54	82-87	180	290

FUEL FLOW DATA - 260 HORIZON W/ VP5.7Gi/DP, 5.7OSi/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	6	23
2500	21	34	8	30
3000	29	46	9	34
3500	35	56	11	41
4000	40	64	16	61
4500	44	71	20	76
WOT	47	76	23	87

FUEL FLOW DATA - 260 HORIZON W/ VP5.7GXi/DP, 5.7OSXi/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	6	23
2500	21	34	9	34
3000	30	48	10	38
3500	35	56	12	45
4000	40	64	17	64
4500	45	72	21	79
WOT	48	77	24	91



FUEL FLOW DATA - 260 HORIZON W/ VP8.1Gi/DP, 8.10Si/ XDP/375/280 & MC496MG/B1/B3/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	20
2500	22	35	9	34
3000	34	55	12	45
3500	40	64	16	60
4000	46	74	20	76
4500	51	82	26	98
WOT	53	85	29	110

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



260 HORIZON OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Docking lights
- Graphics, sport
- Ski pylon, removable
- Trim tabs
- Wakeboard tower w/ custom bimini top
- Wakeboard tower, Deluxe: Tower, bimini top, 2 board racks, 2 tower speakers, Clarion amplifier and 10" woofer
- Wakeboard tower board racks (2)
- Windshield wiper, starboard

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[‡]
- All White[‡]

COCKPIT

- Carpet, cockpit, delete
- Cushions, bow fill-in
- Engine hatch, electric lift
- Head, pumpout (porta-potti standard)
- Table w/mount

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

ENGINE/ SYSTEMS/DRIVE

- Batteries, dual w/switch
- Engine flush-out kit (NA w/Neutra-Salt system)
- Exhaust, thru-side, Quick & Quiet (NA w/Merc engines)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Neutra-Salt system*

CANVAS

- Camper canvas[†]
- Cockpit cover
- Cockpit & forward cover
- Mooring cover[†]
- Windshield connector[†]

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel

- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320
- 8.1 Gi/DP 375 hp
- 8.1 OSi/XDP 375 hp

POWER MerCruiser

- 350 MPI/Bravo I 300 hp
- 350 MPI/Bravo III 300 hp
- MX 6.2/Bravo I 320 hp
- MX 6.2/Bravo III 320 hp
- 496 MG/Bravo I 375 hp
- 496 MG/Bravo III 375 hp

* NA w/MerCruiser; standard w/Ocean Series

[†] NA w/wakeboard tower

[‡] Standard

290 HORIZON

SPECIFICATIONS*	US	METRIC
LOA:	31'2"	9.50 m
Storage Length:	31'2"	9.50 m
Beam:	9'4"	2.84 m
Keel to W/S Shelf:	70"	1.78 m
Total Height:	9'10" w/arch 7'2" w/o arch	3.00/2.18 m
Total Height on Trailer:	11'8" w/arch 9'0" w/o arch	3.56/2.74 m
Transom Angle:	15°	15°
Deadrise:	21°	21°
Bridge Clearance:	7'8" w/arch 5' w/o arch	2.34/1.52 m
Cockpit Height (stern):	31"	79 cm
Cockpit Height (helm):	37"	94 cm
Freeboard (min.):	36"	91 cm
Draft (drive down):	37"	94 cm
Draft (drive up):	18"	46 cm
Fuel:	130 gal	492 L
Potable Water:	20 gal	76 L
Holding:	9 gal	34 L
Gray Water:	12 gal	45 L
Persons Capacity:	15	15
Maximum Capacity:	Yacht	Yacht

* Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	Lbs	KG
MC496MG/B3	375	280	6320	2870
VP8.1 Gi/DP	375	280	6350	2880
VP8.1 OSi/XDP	375	280	6320	2870
Twin MC5.0MPI/B1	260 ea	194 ea	7200	3270
Twin VP5.0 GXi/SX	270 ea	201 ea	7280	3300
Twin MCMX6.2/B1	320 ea	239 ea	7260	3290
Twin VP5.7 GXi/SX	320 ea	239 ea	7280	3300

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
290H	Twin VP5.0GXi/SX	5220	2060	120	780	200	2185
KG							
290H	Twin VP5.0GXi/SX	2368	934	64	354	90	991

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch) IN	CM	Type	Top Speed		Cruise Range	
				MPH	KPH	MI	KM
MC496MG/B3/375/280	24	66	SST	46-49	74-79	200	320
VP8.1Gi/DP/375/280	F5	F5	SST	47-50	76-80	200	320
VP8.1OSi/XDP/375/280	F5	F5	SST	46-49	74-97	200	320
Twin MC5.0MPI/B1/260/194	14 3/4 x 21	38x53	SST	54-57	87-92	180	290
Twin VP5.0GXi/SX/270/201	14 3/4 x 19	38x48	SST	53-56	85-90	180	290
Twin MCMX6.2/B1/320/239	14 5/8 x 23	37x58	SST	58-61	93-98	180	290
Twin VP5.7GXi/SX/320/239	14 3/4 x 21	38x53	SST	58-61	93-98	180	290

FUEL FLOW DATA - 290 HORIZON W/ VP8.1Gi/DP, 8.1OSi/XDP/375/280 & MC496MG/B3/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	8	20
2500	17	27	9	34
3000	29	47	12	45
3500	35	56	16	60
4000	41	66	20	76
4500	46	74	26	98
WOT	48	77	29	110

FUEL FLOW DATA - 290 HORIZON W/ TWIN VP5.0GXi/DP/270/201 & MC5.0MPI/B1/260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	12	45
2500	18	29	14	53
3000	29	47	18	68
3500	37	60	20	76
4000	43	69	28	106
4500	50	80	36	136
WOT	55	89	42	159

FUEL FLOW DATA - 290 HORIZON W/ TWIN VP5.7GXi/SX/320/239 & MCMX6.2/B1/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	12	45
2500	18	29	14	53
3000	30	48	18	68
3500	38	61	22	83
4000	45	72	30	113
4500	52	84	40	151
WOT	60	95	48	181

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



290 HORIZON OPTIONS

HULL/DECK

- Anchor roller
- Bow scuff plate
- Docking lights
- Graphics, sport
- Radar arch
- Windlass w/rope, chain & anchor
- Windshield header, stainless steel
- Windshield wiper, starboard

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[‡]
- All White[†]

COCKPIT

- Carpet, cockpit, delete
- Cushion, aft fill-in
- Cushions, bow fill-in
- Table w/mount
- Walk-thru door

HELM AREA

- Steering wheel, woodgrain/sandstone
- VHF radio

ENTERTAINMENT

- Stereo, CD changer, 6 disc
- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

HEAD AREA

- Gray water system w/holding tank
- Head, overboard discharge (req. head, VacuFlush)
- Head, pump-out (porta-potti standard)
- Head, VacuFlush

ENGINE/ SYSTEMS/DRIVE

- Dockside power
- Engine flush-out (std w 496) (NA w/Neutra-Salt system)
- Exhaust, thru-transom, Quick & Quiet
- Fire extinguishing system
- Fresh water cooling (OSI)
- Neutra-Salt system*

CANVAS

- Camper canvas[†]
- Cockpit cover
- Cockpit & forward cover
- Mooring cover[†]

TRAILER

- Brake, additional
- Tandem axle w/1 axle brake (Die cut logo in fender, painted only)
- Tri-axle w/2 brakes (req. w/twin engines)
- Galvanized trailer w/GatorHyde™

- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Wheel, aluminum

POWER Volvo Penta

- 8.1 Gi/DP 375 hp
- 8.1 OSi/XDP 375 hp
- Twin 5.0 GXi/SX 270 hp
- Twin 5.7 GXi/SX 320 hp

POWER MerCruiser

- 496 MG/Bravo III 375 hp
- Twin 5.0 MPI/Bravo I 260 hp
- Twin MX 6.2/Bravo I 320 hp

* NA w/MerCruiser; standard w/Ocean Series

[†] NA w/radar arch

[‡] Standard



FAST FACTS NOTES

FUNSHIP™

SERIES



204 FUNSHIP

SPECIFICATIONS*

	US	METRIC
LOA:	21'2"	6.45 m
Storage Length:	22'2"	6.76 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	55"	1.40 m
Total Height w/ windshield:	5'11"	1.80 m
Total Height w/ wind deflector:	5'4"	1.63 m
Total Height on trailer w/ windshield:	7'8"	2.34 m
Total Height on trailer w/ wind deflector:	6'10"	2.08 m
Height on Trailer w/Wakeboard tower Dn:	7'8"	2.34 m
Height on Trailer w/Wakeboard tower Up:	10'3"	3.12 m
Transom Angle:	13°	13°
Deadrise:	17°	17°
Bridge Clearance w/ windshield:	4'2"	1.27 m
Bridge Clearance w/ wind deflector:	3'7"	1.09 m
Cockpit Height (stern):	31"	79 cm
Cockpit Height (helm):	33"	84 cm
Freeboard (min.):	34"	86 cm
Draft (drive down):	30"	76 cm
Draft (drive up):	13"	33 cm
Fuel:	50 gal	189 L
Potable Water:	12 gal	45L
Persons Capacity:	11	11
Maximum Capacity:	1700 lbs	771 kg

* Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
MC4.3MPI/A	220	164	3660	1660
VP4.3GX/SX	225	168	3680	1670
VP4.3GX/DP	225	168	3690	1670
MC5.0L/A	220	164	3720	1690
VP5.0GL/SX	220	164	3720	1690
VP5.0GL/DP	220	164	3770	1710
MC5.0MPI/A	260	194	3720	1690
MC5.0MPI/B1	260	194	3760	1710
VP5.0GX/SX	270	201	3800	1720
VP5.0GX/DP	270	201	3810	1730
VP5.00Si/XDP	270	201	3760	1710

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
204FS	VP5.0GX/DP	2770	1040	60	300	150	1330
KG							
204FS	VP5.0GX/DP	1256	472	27	136	68	603

PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC4.3MPI/A/220/164	14½ x 19	37 x 48	AL	46-49	74-79	135	217
VP4.3GX/SX/225/168	14¼ x 21	36 x 53	AL	46-49	74-79	135	217
VP4.3GX/DP/225/168	F7	F7	SST	47-50	78-80	135	217
MC5.0L/A/220/164	14½ x 19	37 x 48	AL	46-49	74-79	125	201
VP5.0GL/SX/220/164	14½ x 19	37 x 48	AL	45-48	72-77	125	201
VP5.0GL/DP/220/164	F6	F6	SST	46-49	74-79	130	209
MC5.0MPI/A/260/194	14½ x 19	37 x 48	AL	49-52	79-84	135	217
MC5.0MPI/B1/260/194	14¾ x 21	38 x 53	SST	49-52	79-84	135	217
VP5.0GX/SX/270/201	14½ x 19	37 x 48	AL	47-50	76-80	135	217
VP5.0GX/DP/270/201	F6	F6	SST	49-52	79-84	140	225
VP5.00Si/XDP/270/201	F6	F6	SST	48-51	77-82	140	225

FUEL FLOW DATA - 204 FUNSHIP W/ VP4.3GX/SX/225/168 & MC4.3MPI/A/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	20	32	6	23
3000	28	45	8	30
3500	35	56	10	38
4000	41	66	13	49
4500	45	72	16	60
WOT	48	77	19	72

FUEL FLOW DATA - 204 FUNSHIP W/ VP5.0GL/SX/220/164 & MC5.0L/A/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	19	30	7	26
3000	27	43	10	38
3500	36	58	13	49
4000	43	69	15	57
WOT	47	76	19	72



FUEL FLOW DATA - 204 FUNSHIP W/ VP5.0GL/DP/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	19	30	7	26
3000	29	47	10	38
3500	38	61	13	49
4000	45	72	15	57
WOT	48	77	19	72

FUEL FLOW DATA - 204 FUNSHIP W/ VP5.0GX/SX/270/201 & MC5.0MPI/A/B1/260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	18	29	7	26
3000	25	40	10	38
3500	34	55	13	49
4000	41	66	15	57
4500	46	74	19	72
WOT	50	81	21	79

FUEL FLOW DATA - 204 FUNSHIP W/ VP5.0GX/DP, 5.0OSi/XDP/270/201

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	19	30	7	26
3000	27	44	10	38
3500	36	58	13	49
4000	42	68	15	57
4500	47	76	19	72
WOT	51	82	21	79

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



204 FUNSHIP OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Docking lights
- Graphics, sport
- Hull accent tape
- Wakeboard tower w/custom bimini top
- Wakeboard tower, Deluxe: Tower, bimini top, 2 board racks, 2 tower speakers, Clarion amplifier and 10" woofer
- Wakeboard tower board racks (2)
- Windscreen, plexiglass

COCKPIT

- Carpet, cockpit, delete
- Cushion, bow fill-in
- Cushion, transom walk-thru fill-in w/backrest
- Engine hatch, electric lift
- Table w/mount
- Walk-thru doors

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

ENGINE/SYSTEMS/DRIVE

- Fresh water cooling (OSI)
- Prop, stainless exchange
- Remote oil filter (5.0 Merc)

CANVAS

- Cockpit & forward cover
- Mooring cover*
- Windshield connector (NA w/windscreen)

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 4.3 GXi/SX 225 hp
- 4.3 GXi/DP 225 hp
- 5.0 GL/SX 220 hp
- 5.0 GL/DP 220 hp
- 5.0 GXi/SX 270 hp
- 5.0 GXi/DP 270 hp
- 5.0 OSI/XDP 270 hp

POWER MerCruiser

- 4.3 MPI/Alpha 220 hp
- 5.0 L/Alpha 220 hp
- 5.0 MPI/Alpha 260 hp
- 5.0 MPI/Bravo I 260 hp

* NA w/wakeboard tower



2 2 4 F U N S H I P

SPECIFICATIONS*	US	METRIC
LOA:	23'8"	7.21 m
Length w/o Swim Platform:	21'0"	6.40 m
Storage Length:	25'7"	7.80 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	55"	1.40 m
Total Height:	6'2"	1.88 m
Total Height on Trailer:	8'0"	2.44 m
Height on Trailer w/Wakeboard tower Dn:	8'0"	2.44 m
Height on Trailer w/Wakeboard tower Up:	10'10"	3.30 m
Transom Angle:	13°	13°
Deadrise:	17°	17°
Bridge Clearance:	4'6"	1.37 m
Cockpit Height (stern):	31"	79 cm
Cockpit Height (helm):	33"	84 cm
Freeboard (min.):	34"	86 cm
Draft (drive down):	31"	79 cm
Draft (drive up):	14"	36 cm
Fuel:	50 gal	189 L
Potable Water:	12 gal	45 L
Holding:	2.6 gal	9.8 L
Persons Capacity:	13	13
Maximum Capacity:	1900 lbs	862 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	KW	Boat & Engine Weights LBS	KG
MC5.0MPI/A	260	194	4170	1890
MC5.0MPI/B1	260	194	4210	1910
VP5.0GXi/SX	270	201	4250	1930
VP5.0GXi/DP	270	201	4260	1930
VP5.00Si/XDP	270	201	4210	1910
VP5.7Gi/SX	280	209	4250	1930
VP5.7Gi/DP	280	209	4260	1930
VP5.70Si/XDP	280	209	4210	1910
MC350MPI/B1	300	224	4210	1910
MC350MPI/B3	300	224	4230	1920



RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trailer Wt.
LBS							
224FS	VP 5.0GXi/DP	3220	1040	60	300	150	1330
KG							
224FS	VP 5.0GXi/DP	1461	472	27	136	68	603

PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC5.0MPI/A/260/194	14 1/2 x 19	36 x 48	AL	45-48	72-77	115	185
MC5.0MPI/B1/260/194	15 1/4 x 19	39 x 48	SST	46-49	74-79	115	185
VP5.0GXi/SX/270/201	14 1/2 x 19	36 x 48	AL	45-48	72-77	115	185
VP5.0GXi/DP/270/201	F5	F5	SST	46-49	74-79	120	193
VP5.00Si/XDP/270/201	F5	F5	SST	45-48	72-77	120	193
VP5.7Gi/SX/280/209	14 3/4 x 19	37 x 48	SST	47-50	76-81	115	185
VP5.7Gi/DP/280/209	F6	F6	SST	48-51	77-82	120	193
VP5.70Si/XDP/280/209	F6	F6	SST	47-50	76-81	120	193
MC350MPI/B1/300/224	14 3/4 x 21	38 x 53	SST	48-51	77-82	115	185
MC350MPI/B3/300/224	26	66	SST	47-50	76-81	115	185

FUEL FLOW DATA - 224 FUNSHIP W/ VP5.0GXi/SX/270/201 & MC5.0MPI/A/B1 & 260/194

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	7	11	6	23
2500	18	29	7	26
3000	25	40	10	38
3500	33	53	13	49
4000	40	64	15	57
4500	44	71	19	72
WOT	47	76	21	79

FUEL FLOW DATA - 224 FUNSHIP W/ VP5.0GXi/DP/270/201 & 5.00Si/XDP

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	8	13	6	23
2500	19	30	7	26
3000	27	44	10	38
3500	35	56	13	49
4000	41	66	15	57
4500	46	74	19	72
WOT	48	77	21	79



FUEL FLOW DATA - 224 FUNSHIP W/ VP5.7Gi/SX/280/209 & MC350MPI/B1/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	18	29	7	27
3000	26	42	10	38
3500	34	55	14	53
4000	41	66	17	64
4500	46	74	20	76
WOT	49	79	23	87

FUEL FLOW DATA - 224 FUNSHIP W/ VP5.7Gi/DP, 5.7OSi/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	20	32	7	27
3000	28	45	10	38
3500	36	58	14	53
4000	42	68	17	64
4500	46	74	20	76
WOT	49	79	23	87

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



224 FUNSHIP OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Graphics, sport
- Ski pylon, removable
- Wakeboard tower w/ custom bimini top
- Wakeboard tower, Deluxe: Tower, bimini top, 2 board racks, 2 tower speakers, Clarion amplifier and 10" woofer
- Wakeboard tower board racks (2)
- Windscreen, plexiglass

COCKPIT

- Carpet, cockpit, delete
- Cushion, bow fill-in
- Engine hatch, electric lift
- Head, pumpout (porta-potti, standard)
- Table w/mount, forward

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

ENGINE/SYSTEMS/ DRIVE

- Batteries, dual w/switch
- Engine flush-out kit (NA w/Neutra-Salt system)
- Fresh water cooling (OSI)
- Neutra-Salt system**
- Prop, stainless exchange

CANVAS

- Camper canvas*
- Cockpit & forward cover*
- Mooring cover*
- Windshield connector (clear) (NA w/ windscreen)

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes

- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 5.0 GXi/SX 270 hp
- 5.0 GXi/DP 270 hp
- 5.0 OSi/XDP 270 hp
- 5.7 Gi/SX 280 hp
- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp

POWER MerCruiser

- 5.0 MPI/Alpha 260 hp
- 5.0 MPI/Bravo I 260 hp
- 350 MPI/Bravo I 300 hp
- 350 MPI/Bravo III 300 hp

* NA w/wakeboard tower

** NA w/MerCruisers; standard w/Ocean Series

2 4 4 F U N S H I P

SPECIFICATIONS*	US	METRIC
LOA:	25'6"	7.77 m
LOA w/o Swim Platform:	22'11"	6.99 m
Storage Length:	28'7"	8.71 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	6'2"	1.57 m
Total Height:	6'4"	1.93 m
Total Height on Trailer:	8'2"	2.49 m
Height on Trailer w/Wakeboard tower Dn:	8'2"	2.49 m
Height on Trailer w/Wakeboard tower Up:	11'0"	3.35 m
Transom Angle:	13°	13°
Deadrise:	17°	17°
Bridge Clearance:	5'2"	1.57 m
Cockpit Height (stern):	31"	79 cm
Cockpit Height (helm):	35"	89 cm
Freeboard (min.):	30"	76 cm
Draft (drive down):	33"	84 cm
Draft (drive up):	17"	43 cm
Fuel:	65 gal	246 L
Potable Water:	12 gal	45 L
Holding:	2.6 gal	9.8 L
Persons Capacity:	14	14
Maximum Capacity:	2050 lbs	930 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	KW	Boat & Engine Weights LBS	KG
MC5.0MPI/B3	260	194	4680	2120
VP5.0GX/DP	270	201	4700	2130
VP5.00Si/XDP	270	201	4660	2110
VP5.7Gi/DP	280	209	4700	2130
VP5.70Si/XDP	280	209	4660	2110
MC350MPI/B3	300	224	4680	2120
MCMX6.2/B3	320	239	4680	2120
VP5.7GX/DP	320	239	4700	2130
VP5.70SX/DP	320	239	4660	2110

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trailer Wt.
LBS							
244FS	VP 5.7Gi/DP	3660	1040	60	390	150	1790
KG							
244FS	VP 5.7Gi/DP	1660	472	27	177	68	812

PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC5.0MPI/B3/260/194	26	66	SST	44-47	71-76	150	240
VP5.0GX/DP/270/201	F5	F5	SST	45-48	72-77	155	250
VP5.00Si/XDP/270/201	F5	F5	SST	44-47	71-76	155	250
VP5.7Gi/DP/280/209	F5	F5	SST	46-49	74-79	155	250
VP5.70Si/XDP/280/209	F5	F5	SST	45-48	72-77	155	250
MC350MPI/B3/300/224	26	66	SST	46-49	74-79	150	240
MCMX6.2/B3/320/239	26	66	SST	48-51	77-82	150	240
VP5.7GX/DP/320/239	F6	F6	SST	49-52	79-84	155	250
VP5.70SX/DP/320/239	F6	F6	SST	48-51	77-82	155	250

FUEL FLOW DATA - 244 FUNSHIP W/ VP5.0GX/DP, 5.00Si/XDP/270/201 & MC5.0MPI/B3/260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	19	30	7	26
3000	27	44	10	38
3500	35	56	13	49
4000	39	63	15	57
4500	43	69	19	72
WOT	46	74	21	79

FUEL FLOW DATA - 244 FUNSHIP WITH VP5.7Gi/DP, 5.70Si/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	23	37	7	22
3000	31	50	11	42
3500	38	61	13	49
4000	41	66	16	60
4500	45	72	21	79
WOT	47	76	23	87



FUEL FLOW DATA - 244 FUNSHIP WITH VP5.7GX/DP, 5.7OSXi/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	23	37	7	22
3000	32	52	11	42
3500	39	63	13	49
4000	45	72	16	60
4500	48	77	21	79
WOT	50	81	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



244 FUNSHIP OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Graphics, sport
- Ski pylon, removable
- Wakeboard tower w/ custom bimini top
- Wakeboard tower, Deluxe: Tower, bimini top, 2 board racks, 2 tower speakers, Clarion amplifier and 10" woofer
- Wakeboard tower board racks (2)
- Windscreen, plexiglass

COCKPIT

- Carpet, cockpit, delete
- Cushion, bow fill-in
- Engine hatch, electric lift
- Head, pumpout
- Table w/mount, forward

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

ENGINE/ SYSTEMS/DRIVE

- Batteries, dual w/switch
- Engine flush-out kit (NA w/Neutra-Salt system)
- Fresh water cooling (OSI)
- Neutra-Salt system**

CANVAS

- Bimini, forward*
- Camper canvas* (Requires forward bimini top)
- Cockpit & forward cover
- Mooring cover*

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 5.0 GXi/DP 270 hp
- 5.0 OSi/XDP 270 hp
- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320 hp

POWER MerCruiser

- 5.0 MPI/Bravo III 260 hp
- 350 MPI/Bravo III 300 hp
- MX 6.2/Bravo III 320 hp

* NA w/wakeboard tower

** NA w/MerCruisers; standard w/Ocean Series



274 FUNSHIP

SPECIFICATIONS*

	US	METRIC
LOA w/Extended Swim Platform:	28'2"	8.59 m
LOA:	25'6"	7.77 m
Beam:	8'6"	2.59 m
Storage Length:	28'2"	8.59 m
Keel to W/S Shelf:	6'0"	1.52 m
Total Height:	6'4"	1.93 m
Total Height on Trailer:	8'2"	2.49 m
Transom Angle:	14°	14°
Deadrise:	17°	17°
Bridge Clearance:	5'2"	1.57 m
Cockpit Height (stern):	29"	74 cm
Cockpit Height (helm):	37"	94 cm
Freeboard (min.):	31"	79 cm
Draft (drive down):	34"	86 cm
Draft (drive up):	17"	43 cm
Fuel:	80 gal	303 L
Potable Water:	12 gal	45 L
Holding:	2.6 gal	9.8 L
Persons Capacity:	15	15
Maximum Capacity:	2300 lbs	1043 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
VP5.7Gi/DP	280	209	5220	2370
VP5.70Si/XDP	280	209	5170	2350
MC350MPI/B3	300	224	5200	2360
MCMX6.2/B3	320	239	5200	2360
VP5.7GXi/DP	320	239	5220	2370
VP5.70SXi/XDP	320	239	5170	2350
MC496MG/B3	375	280	5380	2440
VP8.1Gi/DP	375	280	5410	2450
VP8.10Si/XDP	375	280	5380	2440

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trailer Wt.
LBS							
274FS	VP 5.7GXi/DP	4180	1040	60	480	150	1860
KG							
274FS	VP 5.7GXi/DP	1896	472	27	218	68	844



PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
VP5.7Gi/DP/280/209	F5	F5	SST	45-48	72-77	160	260
VP5.70Si/XDP/280/209	F5	F5	SST	44-47	71-76	160	260
MC350MPI/B3/300/224	24	61	SST	45-48	72-77	150	240
MCMX6.2/B3/320/239	26	66	SST	46-49	74-77	150	240
VP5.7GXi/DP/320/239	F5	F5	SST	47-50	76-81	160	260
VP5.70SXi/XDP/320/239	F5	F5	SST	46-49	74-77	160	260
MC496MG/B3/375/280	26	66	SST	50-53	81-85	150	240
VP8.10Si/XDP/375/280	F6	F6	SST	50-53	81-85	150	240
VP8.1Gi/DP/375/280	F6	F6	SST	51-54	82-87	150	240

FUEL FLOW DATA - 274 FUNSHIP W/ VP5.7Gi/DP, 5.70Si/XDP/280/209

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	23	37	6	23
3000	29	47	7	26
3500	35	56	10	38
4000	40	64	13	49
4500	44	71	17	64
WOT	46	74	23	87

FUEL FLOW DATA - 274 FUNSHIP WITH MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	14	5	19
2500	20	32	6	23
3000	25	40	7	27
3500	32	52	10	38
4000	38	61	13	49
4500	43	69	17	64
WOT	47	75	23	87

FUEL FLOW DATA - 274 FUNSHIP W/ VP 5.7GXi/DP, 5.70SXi/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	5	19
2500	23	37	6	23
3000	29	47	7	26
3500	35	56	10	38
4000	41	66	14	53
4500	45	72	18	68
WOT	48	77	24	91



FUEL FLOW DATA - 274 FUNSHIP W/ VP8.1Gi/DP, 8.1OSi/XDP/375/280 & MC496MG/B3/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	22	35	9	34
3000	34	55	12	45
3500	40	64	16	60
4000	45	72	20	76
4500	50	80	26	98
WOT	52	84	29	110

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



274 FUNSHIP OPTIONS

HULL/DECK

- Bow scuff plate
- Cleats, pull-up
- Graphics, sport
- Ski pylon, removable

COCKPIT

- Carpet, cockpit, delete
- Cushion, bow fill-in
- Engine hatch, electric lift (std w/496 & 8.1 engines)
- Head, pumpout (porta-potti, standard)
- Table w/mount, forward

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

ENGINE/ SYSTEMS/DRIVE

- Batteries, dual w/switch
- Engine flush-out kit (Standard on 496; NA w/Neutra-Salt system)
- Fresh water cooling (OSI)
- Neutra-Salt system*

CANVAS

- Bimini, forward
- Camper canvas (Requires forward bimini top)
- Cockpit cover & forward cover
- Mooring cover

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320 hp
- 8.1 Gi/DP 375 hp
- 8.1 OSi/XDP 375 hp

POWER MerCruiser

- 350 MPI/Bravo III 300 hp
- MX 6.2/Bravo III 320 hp
- 496 MG/Bravo III 375 hp

* NA w/MerCruisers; standard w/Ocean Series

SUNDOWNER®

S E R I E S





215 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	23'0"	7.01 m
Storage Length:	23'0"	7.01 m
Maximum Sleeping Depth:	78"	1.98 m
Maximum Sleeping Width:	65"	1.65 m
Beam:	8'1"	2.46 m
Keel to W/S Shelf:	60"	1.52 m
Total Height:	6'0"	1.83 m
Total Height on Trailer:	7'5"	2.26 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	5'5"	1.65 m
Cabin Height:	4'5"	1.35 m
Cockpit Height (stern):	32"	81 cm
Cockpit Height (helm):	35"	89 cm
Freeboard (min.):	34"	86 cm
Draft (drive down):	34"	86 cm
Draft (drive up):	17"	43 cm
Fuel:	35 gal	132 L
Potable Water:	12 gal	45 L
Holding:	2.6 gal	9.8 L
Persons Capacity:	9	9
Maximum Capacity:	1500 lbs	680 kg

* Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	KW	Boat & Engine Weights LBS	KG
MC5.0L/A	220	164	3730	1690
VP5.0GL/SX	220	164	3730	1690
MC5.0MPI/A	260	194	3730	1690
MC5.0MPI/B1	260	194	3770	1710
VP5.0GX/SX	270	201	3810	1730
VP5.0GX/DP	270	201	3820	1730
VP5.0OSX/XDP	270	201	3770	1710
VP5.7Gi/SX	280	209	3810	1730
VP5.7Gi/DP	280	209	3820	1730
VP5.70Si/XDP	280	209	3770	1710
MC350MPI/B1	300	224	3770	1710
MC350MPI/B3	300	224	3800	1720



RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
215S	VP 5.0GX/DP	2780	1040	60	210	150	1150
KG							
215S	VP 5.0GX/DP	1261	472	27	95	68	508

PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch) IN	CM	Type	Top Speed		Cruise Range	
				MPH	KPH	MI	KM
MC5.0L/A/220/164	14¹/₂ x 19	37 x 48	AL	43-46	69-74	110	177
VP5.0GL/SX/220/164	14¹/₂ x 19	37 x 48	AL	43-46	69-74	110	177
MC5.0MPI/A/260/194	14¹/₂ x 19	37 x 48	AL	47-50	76-80	115	185
MC5.0MPI/B1/260/194	15¹/₄ x 19	39 x 48	SST	48-51	77-82	115	185
VP5.0GX/SX/270/201	14¹/₂ x 19	37 x 48	AL	47-50	76-80	115	185
VP5.0GX/DP/270/201	F6	F6	SST	48-51	77-82	120	193
VP5.0OSi/XDP/270/201	F6	F6	SST	47-50	76-80	120	193
VP5.7Gi/SX/280/209	14³/₄ x 19	37 x 48	SST	50-53	80-85	115	185
VP5.7Gi/DP/280/209	F6	F6	SST	50-53	80-85	120	193
VP5.70Si/XDP/280/209	F6	F6	SST	49-52	79-84	120	193
MC350MPI/B1/300/224	14³/₄ x 21	38 x 53	SST	51-54	82-87	115	185
MC350MPI/B3/300/224	28	71	SST	51-54	82-87	115	185

FUEL FLOW DATA - 215 SUNDOWNER W/ VP5.0GL/SX/220/164 & MC5.0L/A/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	5	19
2500	11	18	6	23
3000	26	42	8	31
3500	33	53	9	34
4000	38	61	13	45
4500	43	69	17	64
WOT	45	72	19	72

FUEL FLOW DATA - 215 SUNDOWNER W/ VP5.0GX/SX/270/201 & MC5.0MPI/A/B1/260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	27	44	9	34
3500	34	55	10	38
4000	40	64	14	53
4500	45	72	18	68
WOT	49	79	21	80



FUEL FLOW DATA - 215 SUNDOWNER W/ VP5.0GX/DP, 5.0OSi/XDP//270/201

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	6	23
2500	21	34	7	27
3000	29	47	9	34
3500	34	55	10	38
4000	41	66	14	53
4500	45	72	18	68
WOT	49	79	22	83

FUEL FLOW DATA - 215 SUNDOWNER W/ VP5.7Gi/SX/280/209 & MC350MPI/B1/300/224

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	8	13	6	23
2500	12	19	7	27
3000	28	45	9	34
3500	35	56	11	42
4000	42	68	15	57
4500	48	77	19	72
WOT	52	84	23	87

FUEL FLOW DATA - 215 SUNDOWNER W/ VP5.7Gi/DP, 5.7OSi/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	11	18	6	23
2500	21	34	7	27
3000	29	47	9	34
3500	35	56	11	42
4000	43	69	15	57
4500	48	77	19	72
WOT	52	84	23	87

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



215 SUNDOWNER OPTIONS

HULL/DECK

- Bow scuff plate
- Graphics, sport
- Windshield wiper, starboard

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[‡]
- All White[‡]

COCKPIT

- Carpet, cockpit, delete
- Cushion, aft fill-in
- Head, pumpout (porta-potti, standard)
- Stove, one burner, butane
- Table w/mount

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

ENGINE/ SYSTEMS/DRIVE

- Batteries, dual w/switch
- Engine flush-out (NA w/Neutra-Salt system)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Prop, stainless exchange
- Remote oil filter (5.0 L Merc; standard on all other engines)
- Neutra-Salt system*

CANVAS

- Camper canvas**
- Cockpit cover
- Mooring cover
- Windshield connector

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 5.0 GL/SX 220 hp
- 5.0 GL/DP 240 hp
- 5.0 GXi/SX 270 hp
- 5.0 GXi/DP 270 hp
- 5.0 OSi/XDP 270 hp
- 5.7 Gi/SX 280 hp
- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp

POWER MerCruiser

- 5.0 L/Alpha 220 hp
- 5.0 MPI/Alpha 260 hp
- 5.0 MPI/Bravo I 260 hp
- 350 MPI/Bravo I 300 hp
- 350 MPI/Bravo III 300 hp

* NA w/MerCruisers; standard w/Ocean Series

** Includes windshield connector

‡ Standard



255 SUNDOWNER

SPECIFICATIONS*	US	METRIC
LOA:	26'9"	8.15 m
Storage Length:	26'9"	8.15 m
Maximum Sleeping Depth:	94"	2.39 m
Maximum Sleeping Width:	77"	1.96 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	66"	1.68 m
Total Height:	6'10"	2.08 m
Total Height on Trailer:	8'4"	2.54 m
Transom Angle:	15°	15°
Deadrise:	20°	20°
Bridge Clearance:	6'3"	1.91 m
Cabin Height:	4'5"	1.35 m
Cockpit Height (stern):	33"	84 cm
Cockpit Height (helm):	37"	94 cm
Freeboard (min.):	38"	97 cm
Draft (drive down):	36"	91 cm
Draft (drive up):	19"	48 cm
Fuel:	65 gal	246 L
Potable Water:	12 gal	45 L
Holding:	2.6 gal	9.8 L
Persons Capacity:	12	12
Maximum Capacity:	2500 lbs	1134 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
VP5.7Gi/DP	280	209	4700	2130
VP5.7OSi/XDP	280	209	4650	2100
MC350MPI/B3	300	224	4680	2120
MCMX6.2/B3	320	239	4680	2120
VP5.7GXi/DP	320	239	4700	2130
VP5.7OSXi/XDP	320	239	4650	2100
MC496MG/B3	375	280	4880	2210
VP8.1Gi/DP	375	280	4910	2230
VP8.1OSi/XDP	375	280	4880	2210



RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
255S	VP 5.7Gi/DP	3660	1040	60	390	250	1370
KG							
255S	VP 5.7Gi/DP	1660	472	27	177	113	622

PERFORMANCE

Power HP/ KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
VP5.7Gi/DP/280/209	F5	F5	SST	46-49	74-79	190	305
VP5.7OSi/XDP/280/209	F5	F5	SST	45-48	72-77	190	305
MC350MPI/B3/300/224	26	66	SST	46-49	74-79	180	290
MCMX6.2/B3/320/239	26	66	SST	47-50	77-80	180	290
VP5.7GXi/DP/320/239	F6	F6	SST	48-51	77-82	190	305
VP5.7OSi/XDP/320/239	F6	F6	SST	47-50	77-80	190	305
MC496MG/B3/375/280	28	71	SST	51-54	82-87	170	275
VP8.1Gi/DP/375/280	F7	F7	SST	52-55	84-89	170	275
VP8.1OSi/XDP/375/280	F7	F7	SST	51-54	82-87	170	275

FUEL FLOW DATA - 255 SUNDOWNER W/ VP5.7Gi/DP, 5.7OSi/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	6	23
2500	21	34	7	27
3000	30	48	9	34
3500	35	56	11	42
4000	39	63	15	57
4500	43	69	19	72
WOT	47	76	23	87

FUEL FLOW DATA - 255 SUNDOWNER W/ VP5.7GXi/DP, 5.7OSXi/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	6	23
2500	21	34	7	27
3000	31	50	9	34
3500	36	58	11	42
4000	40	64	15	57
4500	45	72	19	72
WOT	49	79	24	91



FUEL FLOW DATA - 255 SUNDOWNER W/ VP8.1Gi/DP, 8.10Si/XDP/375/280 & MC496MG/B3/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	8	30
2500	22	35	9	34
3000	34	55	12	45
3500	41	66	16	60
4000	47	76	20	76
4500	51	82	26	98
WOT	53	85	29	110

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



255 SUNDOWNER OPTIONS

HULL/DECK

- Bow scuff plate
- Graphics, sport
- Trim tabs
- Windshield wiper, starboard

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two Tone†
- All White†

COCKPIT

- Carpet, cockpit, delete
- Cushion, aft fill-in
- Head, enclosed
- Head, pumpout (porta-potti, standard)
- Stove, one burner, butane
- Table w/mount

HELM AREA

- Steering wheel, woodgrain/sandstone

ENTERTAINMENT

- Stereo remote w/ display @ transom
- Stereo upgrade: Includes Clarion® amplifier, 10" subwoofer and tweeters

ENGINE/ SYSTEMS/DRIVE

- Batteries, dual w/switch
- Dockside power
- Engine flush-out (NA w/Neutra-Salt system)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Neutra-Salt system*

CANVAS

- Camper canvas**
- Cockpit cover
- Mooring cover
- Windshield connector

TRAILER

- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel – aluminum or galvanized
- Trailer, delete
- Wheel, aluminum

POWER Volvo Penta

- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320 hp
- 8.1 Gi/DP 375 hp
- 8.1 OSi/XDP 375 hp

POWER MerCruiser

- 350 MPI/Bravo III 300 hp
- MX 6.2/Bravo III 320 hp
- 496 MG/Bravo III 375 hp

* NA w/MerCruisers; standard w/Ocean Series

** Includes windshield connector

† Standard

VISTA[®]

SERIES



248 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	26'2"	7.98 m
Length w/o Swim Platform:	23'10"	7.27 m
Maximum Sleeping Depth (V-Berth):	84"	2.13 m
Maximum Sleeping Width (V-Berth):	78"	1.98 m
Maximum Sleeping Depth (Mid Cabin):	73"	1.85 m
Maximum Sleeping Width (Mid Cabin):	53"	1.35 m
Beam:	8'6"	2.55 m
Keel to W/S Shelf:	6'10"	2.08 m
Total Height:	8'5"	2.57 m
Total Height on Trailer:	10'0"	3.05 m
Transom Angle:	15°	15°
Deadrise:	17°	17°
Bridge Clearance:	6'9"	2.06 m
Cockpit Height (stern):	23"	58 cm
Cockpit Height (helm):	27"/37"	69 cm/94 cm
Headroom (max.):	5'10"	1.78 m
Freeboard (min.):	47"	1.19 m
Draft (drive down):	36"	91 cm
Draft (drive up):	19"	48 cm
Fuel:	70 gal	265 L
Potable Water:	20 gal	76 L
Holding - Portapotty:	2.6 gal	9.8 L
Holding - Tank:	16 gal	60 L
Passengers:	10	10
Maximum Capacity:	2350 lbs	1066 kg

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power HP	KW	Boat & Engine Weights LBS	KG
MC5.0MPI/B3	260	194	6020	2730
VP5.0 GXI/DP	270	201	6040	2740
VP5.0 OSI/XDP	270	201	5990	2720
VP5.7 Gi/DP	280	209	6040	2740
VP5.7 OSI/XDP	280	209	5990	2720
MC350MPI/B3	300	224	6020	2730
MCMX6.2/B3	320	239	6020	2730
VP5.7 GXI/DP	320	239	6040	2740
VP5.7 OSXI/XDP	320	239	5990	2720

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
248V	VP5.7 Gi/DP	5000	1040	120	420	250	1620
KG							
248V	VP5.7 Gi/DP	2268	472	54	190	113	735

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch) IN	Type	Top Speed MPH	KPH	Cruise Range MI	KM
MC5.0MPI/B3/260/194	22	F3	37-40	60-64	150	240
VP5.0GX/DP/270/201	F3	F3	38-41	61-66	160	260
VP5.0OSI/XDP/270/201	F3	F3	37-40	60-64	160	260
VP5.7Gi/DP/280/209	F4	F4	42-45	68-72	160	260
VP5.7OSI/XDP/280/209	F4	F4	41-44	66-71	160	260
MC350MPI/B3/300/224	24	F3	41-44	66-71	150	240
MCMX6.2/B3/320/239	24	F3	42-45	68-72	150	240
VP5.7GX/DP/320/239	F4	F4	43-46	69-74	160	260
VP5.7OSXI/XDP/320/239	F4	F4	42-45	68-72	160	260

FUEL FLOW DATA - 248 VISTA W/ MC5.0MPI/B3/260/194

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	7	11	5	19
2500	8	13	7	27
3000	17	27	9	34
3500	25	40	11	42
4000	31	50	13	49
4500	36	58	18	68
WOT	38	61	21	79

FUEL FLOW DATA - 248 VISTA W/ VP5.0GX/DP/270/201 & VP5.0OSI/XDP/270/201

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	8	13	5	19
2500	9	14	6	23
3000	19	31	8	30
3500	26	42	10	38
4000	31	50	12	45
4500	36	58	17	64
WOT	39	63	21	80



FUEL FLOW DATA - 248 VISTA W/ VP5.7Gi/DP/280/209, VP5.7OSi/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	7	27
3000	20	32	9	34
3500	28	45	11	42
4000	34	55	13	49
4500	39	63	18	68
WOT	43	69	23	87

FUEL FLOW DATA - 248 VISTA W/ VP5.7GXi/DP/320/239, VP5.7OSXi/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	7	27
3000	20	32	9	34
3500	28	45	11	42
4000	34	55	14	53
4500	40	64	20	76
WOT	44	71	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



248 VISTA OPTIONS

HULL/DECK

- Anchor w/rope & chain
- Flexiteek swim platform
- Light, spot/flood, remote
- Sunpads, deck
- Windshield wiper, starboard

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone†
- All White†

COCKPIT

- Carpet, cockpit, delete
- Cushion, aft fill-in

HELM AREA

- Navigation package: Includes Raymarine VHF-48, Raynav 300 GPS
- Steering wheel, woodgrain/sandstone
- VHF radio

ENTERTAINMENT

- CD changer, 6-disc
- Stereo remote w/ display @ transom
- TV, flat screen and DVD player, cabin

CABIN & GALLEY

- Air conditioning/heating
- Microwave oven
- Pillow package

INTERIOR

FABRIC SCHEME

- Black Stone
- Natural Shell
- Nautical Blue

HEAD AND SHOWER AREA

- Gray water system w/holding tank
- Head, overboard discharge
- Head, Vacu-flush
- Tank level indicators

ENGINE/ SYSTEMS/DRIVE

- Engine flush-out kit (NA w/Neutra-Salt system)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Gas vapor detector
- Neutra-Salt system*

CANVAS

- Cockpit cover

TRAILER

- Tandem axle trailer w/1 axle brake - Die cut logo in fender
- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes

- Spare tire & wheel
- Spare tire & wheel - aluminum or galvanized
- Wheel, aluminum

CUSTOMER CARE

- Sea Key system

POWER Volvo Penta

- 5.0 GXi/DP 270 hp
- 5.0 OSi/XDP 270 hp
- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320 hp

POWER MerCruiser

- 5.0 MPI/Bravo III 260 hp
- 350 MPI/Bravo III 300 hp
- MX 6.2 Bravo III 320 hp

* NA w/MerCruisers; standard w/Ocean Series

† Standard

258 VISTA

SPECIFICATIONS*

	US	METRIC
LOA:	26'0"	7.92 m
Maximum Sleeping Depth (V-Berth):	84"	2.13 m
Maximum Sleeping Width (V-Berth):	78"	1.98 m
Maximum Sleeping Depth (Mid Cabin):	73"	1.85 m
Maximum Sleeping Width (Mid Cabin):	53"	1.35 m
Beam:	8'6"	2.55 m
Keel to W/S Shelf:	6'10"	2.08 m
Total Height:	8'5"	2.57 m
Total Height on Trailer:	10'0"	3.05 m
Transom Angle:	15°	15°
Deadrise:	17°	17°
Bridge Clearance:	6'11"	2.11 m
Cockpit Height (stern):	23"	58 cm
Cockpit Height (helm):	27"/37"	69 cm / 94 cm
Headroom (max.):	5'10"	1.78 m
Freeboard (min.):	47"	1.19 m
Draft (drive down):	36"	91 cm
Draft (drive up):	19"	48 cm
Fuel:	70 gal	265 L
Potable Water:	16 gal	60 L
Holding - Portapotty:	2.6 gal	9.8 L
Holding -Tank:	16 gal	60 L
Passengers:	10	10
Maximum Capacity:	Yacht	Yacht

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
MC5.0MPI/B3	260	194	6100	2770
VP5.0 GXi/DP	270	201	6120	2780
VP5.0 OSI/XDP	270	201	6070	2750
VP5.7 Gi/DP	280	209	6120	2780
VP5.7 OSI/XDP	280	209	6070	2750
MC350MPI/B3	300	224	6100	2770
MCMX6.2/B3	320	239	6100	2770
VP5.7 GXi/DP	320	239	6120	2780
VP5.7 OSXi/XDP	320	239	6070	2750

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
258V	VP5.7 Gi/DP	5080	1040	120	420	250	1690
KG							
258V	VP5.7 Gi/DP	2304	472	54	190	113	766

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
MC5.0MPI/B3/260/194	22	56	SST	36-39	58-63	150	240
VP5.0GXi/DP/270/201	F3	F3	SST	37-40	60-64	160	260
VP5.0OSi/XDP/270/201	F3	F3	SST	36-39	58-63	160	260
VP5.7Gi/DP/280/209	F4	F4	SST	40-43	64-69	160	260
VP5.7OSi/XDP/280/209	F4	F4	SST	39-42	63-68	160	260
MC350MPI/B3/300/224	24	61	SST	39-42	63-68	150	240
MCMX6.2/B3/320/239	24	61	SST	40-43	64-69	150	240
VP5.7GXi/DP/320/239	F4	F4	SST	41-44	66-71	160	260
VP5.7OSXi/XDP/320/239	F4	F4	SST	40-43	64-69	160	260

FUEL FLOW DATA - 258 VISTA W/ MC5.0MPI/B3/ 260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	7	11	5	19
2500	8	13	7	27
3000	17	27	9	34
3500	24	39	11	42
4000	30	48	13	49
4500	35	56	18	68
WOT	37	60	21	79

FUEL FLOW DATA - 258 VISTA W/ VP5.0GXi/DP/270/201 & VP5.0OSi/XDP/270/201

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	6	23
3000	19	31	8	30
3500	26	42	10	38
4000	31	50	12	45
4500	35	56	17	64
WOT	38	61	21	80



FUEL FLOW DATA - 258 VISTA W/ VP5.7Gi/DP/280/209, VP5.7OSi/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	7	27
3000	20	32	9	34
3500	28	45	11	42
4000	33	53	13	49
4500	38	61	18	68
WOT	41	66	23	87

FUEL FLOW DATA - 258 VISTA W/ VP5.7GXi/DP/320/239, VP5.7OSXi/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	5	19
2500	9	14	7	27
3000	20	32	9	34
3500	28	45	11	42
4000	34	55	14	53
4500	39	63	20	76
WOT	42	68	24	91

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



258 VISTA OPTIONS

HULL/DECK

- Anchor w/rope & chain
- Flexiteek swim platform
- Light spot/flood remote
- Sunpads, deck
- Windshield wiper, starboard

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[‡]
- All White[‡]

COCKPIT

- Carpet, cockpit, delete
- U-shape stern seating

HELM AREA

- Navigation Package: Includes Raymarine VHF-48, RC435 GPS/Plotter
- Steering wheel, woodgrain/sandstone
- VHF radio

ENTERTAINMENT

- CD changer, 6-disc
- Stereo remote w/ display @ transom
- Stereo upgrade includes: Clarion[®] amplifier, 10" subwoofer & tweeters
- TV, flat screen and DVD player, cabin

CABIN & GALLEY

- Air conditioning/heating
- Pillow package

INTERIOR

FABRIC SCHEME

- Black Stone
- Natural Shell
- Nautical Blue

HEAD AND

SHOWER AREA

- Gray water system w/holding tank
- Head, overboard discharge
- Head, Vacu-flush
- Tank level indicators

ENGINE/

SYSTEMS/DRIVE

- Engine flush-out kit (NA w/Neutra-Salt system)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Gas vapor detector
- Generator (includes AC), 3kw @110VAC, 4kw @230 VAC (NA w/Gray water system)
- Neutra-Salt system*

CANVAS

- Cockpit cover

TRAILER

- Tandem axle trailer w/1 axle brake - Die cut logo in fender
- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel - aluminum or galvanized
- Wheel, aluminum

CUSTOMER CARE

- Sea Key system

POWER Volvo Penta

- 5.0 GXi/DP 270 hp
- 5.0 OSi/XDP 270 hp
- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320 hp

POWER MerCruiser

- Twin 350 MPI/Bravo III 300 hp
- Twin MX 6.2 Bravo III 320 hp

* NA w/MerCruisers; standard w/Ocean Series

[‡] Standard

288 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	30'0"	9.14 m
Maximum Sleeping Depth (V-Berth):	62"	1.57 m
Maximum Sleeping Width (V-Berth):	80"	2.03 m
Maximum Sleeping Depth (Mid Cabin):	54"	1.37 m
Maximum Sleeping Width (Mid Cabin):	74"	1.88 m
Beam:	9'8"	2.95 m
Keel to W/S Shelf:	7'7"	2.31 m
Keel to Top of Windshield:	9'4"	2.85 m
Total Height:	11'2" w/arch	3.40 m
Transom Angle:	15°	15°
Deadrise:	18°	18°
Bridge Clearance:	9'4" w/arch	2.85 m
Cockpit Height (stern):	27"	69 cm
Cockpit Height (helm):	26"	66 cm
Headroom (max):	6'3"	1.91 m
Freeboard (min.):	47"	1.19 m
Draft (drive down):	38"	97 cm
Draft (drive up):	27"	68 cm
Fuel:	120 gal	454 L
Potable Water:	27 gal	102 L
Holding:	25 gal	95 L
Passengers:	10	10
Maximum Capacity:	Yacht	Yacht

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
Twin MC4.3MPI/B3	220 ea	164 ea	10010	4540
Twin VP4.3GX/DP	225 ea	168 ea	10010	4520
Twin VP4.30Si/XDP	225 ea	168 ea	9970	4520
Twin MC5.0MPI/B3	260 ea	194 ea	10150	4620
Twin VP5.0GX/SX	270 ea	201 ea	10170	4590
Twin VP5.0GX/DP	270 ea	201 ea	10190	4600
Twin VP5.00Si/XDP	270 ea	201 ea	10090	4580

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
LBS						
288V	Twin 5.0GX/DP	8110	2080	180	720	750
KG						
288V	Twin 5.0GX/DP	3679	943	82	327	344

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
TwinMC4.3MPI/B3/220/164	24	61	SST	41-44	66-71	190	310
TwinVP4.3GX/DP/225/168	F7	F7	SST	42-45	68-72	190	310
TwinVP4.30Si/XDP/25/168	F7	F7	SST	41-44	66-71	190	310
TwinMC5.0MPI/B3/260/194	24	61	SST	44-47	71-76	190	310
TwinVP5.0GX/SX/270/201	14³/₄ x 19	38x48	SST	44-47	71-76	180	290
TwinVP5.0GX/DP/270/201	F5	F5	SST	45-48	72-77	190	310
TwinVP5.00Si/XDP/270/201	F5	F5	SST	44-47	71-76	190	310

FUEL FLOW DATA - 288 VISTA W/ TWIN VP4.3GX/DP/225/168, VP4.30Si/XDP/225/168 & MC4.3MPI/B3/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	14	7	26
2500	12	19	12	45
3000	23	37	16	60
3500	31	50	20	76
4000	36	58	26	98
4500	41	66	32	121
WOT	43	69	36	136

FUEL FLOW DATA - 288 VISTA W/ TWIN VP5.0GX/SX/270/201

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	14	8	30
2500	15	24	12	45
3000	24	39	14	53
3500	29	47	19	72
4000	36	58	24	91
4500	42	68	32	121
WOT	45	72	40	151



FUEL FLOW DATA - 288 VISTA W/ TWIN VP5.0GX/DP/270/201, VP5.00Si/DP/270/201 & MC5.0MPI/B3/260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	8	30
2500	19	31	12	45
3000	28	45	14	53
3500	32	52	19	72
4000	40	64	22	83
4500	43	69	32	121
WOT	46	74	40	151

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



288 VISTA OPTIONS

HULL/DECK

- Flexiteek swim platform
- Light, spot/flood, remote
- Sunpads, deck
- Windlass w/rope, chain and anchor
- Windshield header, stainless steel
- Windshield wiper, port

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[‡]
- All White[‡]

COCKPIT

- Carpet, cockpit, delete
- Cushion, aft fill-in

HELM AREA

- Navigation Package: Includes Raymarine VHF-215, RC435 GPS/Plotter
- VHF radio

ENTERTAINMENT

- CD changer, 6-disc
- Stereo remote w/ display @ transom
- Stereo upgrade includes: Clarion[®] amplifier, 10" subwoofer & tweeters

CABIN & GALLEY

- Air conditioning/heating
- Stove alcohol/electric

Interior

Fabric Scheme

- Black Stone
- Natural Shell
- Nautical Blue

HEAD AND

SHOWER AREA

- Gray water system w/holding tank
- Head, overboard discharge
- Head, Vacu-flush
- Tank level indicators

ENGINE/ SYSTEMS/DRIVE

- Engine flush-out kit (NA w/Neutra-Salt system)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Gas vapor detector
- Generator, 5kw @110VAC, 4kw @230 VAC (NA w/Gray water system)
- Neutra-Salt system*

CANVAS

- Cockpit cover

CUSTOMER CARE

- Sea Key system

POWER Volvo Penta

- Twin 4.3 GXI/DP 225 hp
- Twin 4.3 OSI/XDP 225 hp
- Twin 5.0 GXI/SX 270 hp
- Twin 5.0 GXI/DP 270 hp
- Twin 5.0 OSI/XDP 270 hp

POWER MerCruiser

- Twin 4.3 MPI/Bravo III 220 hp
- Twin 5.0 MPI/Bravo III 260 hp

* NA w/MerCruisers; standard w/Ocean Series

‡ Standard

278 VISTA

SPECIFICATIONS*

	US	METRIC
LOA:	28'4"	8.64 m
Maximum Sleeping Depth (V-Berth):	90"	2.29 m
Maximum Sleeping Width (V-Berth):	74"	1.88 m
Maximum Sleeping Depth (Mid Cabin):	76"	1.93 m
Maximum Sleeping Width (Mid Cabin):	60"	1.52 m
Beam:	8'6"	2.59 m
Keel to W/S Shelf:	7'1"	2.16 m
Total Height:	11'4" w/arch 8'9" wo/arch	3.45/2.67 m
Total Height on Trailer:	13'4" w/arch 10'9" wo/arch	4.06/3.28 m
Transom Angle:	15°	15°
Deadrise:	17°	17°
Bridge Clearance:	9'7" w/arch 7'0" wo/arch	2.92/2.13 m
Cockpit Height (stern):	24"	61 cm
Cockpit Height (helm):	27"/37"	69 cm / 94 cm
Headroom (max):	6'	1.83 m
Freeboard (min.):	48"	1.22 m
Draft (drive down):	39"	99 cm
Draft (drive up):	22"	56 cm
Fuel:	85 gal	321 L
Potable Water:	21 gal	79 L
Holding:	21 gal	79 L
Gray Water:	17 gal	65 L
Passengers:	10	10
Maximum Capacity:	Yacht	Yacht

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
VP5.7Gi/DP	280	209	6930	3140
VP5.70Si/XDP	280	209	6880	3120
MC350MPI/B3	300	224	6910	3130
MCMX6.2/B3	320	239	6910	3130
VP5.7GXi/DP	320	239	6930	3140
VP5.70Si/XDP	320	239	6880	3120
VP8.1Gi/DP	375	280	7100	3220
VP8.10Si/XDP	375	280	7070	3210

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.	Trail Wt.
LBS							
278V	VP5.7GXi/DP	5890	1040	120	510	350	1680
KG							
278V	VP5.7GXi/DP	2672	472	54	231	158	762

PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch) IN CM	Type	Top Speed		Cruise Range	
			MPH	KPH	MI	KM
VP5.7Gi/DP/280/209	F4	F4	SST	40-43	64-69	170 274
VP5.70Si/XDP/280/209	F4	F4	SST	40-43	64-69	170 274
MC350MPI/B3/300/224	22	56	SST	40-43	64-69	150 240
MCMX6.2/B3/320/239	22	56	SST	41-44	66-71	150 240
VP5.7GXi/DP/320/239	F4	F4	SST	41-44	66-71	160 258
VP5.70Si/XDP/320/239	F4	F4	SST	41-44	66-71	160 258
VP8.1Gi/DP/375/280	F5	F5	SST	44-47	71-76	160 258
VP8.10Si/XDP/375/280	F5	F5	SST	44-47	71-76	160 258

FUEL FLOW DATA - 278 VISTA W/ VP5.7Gi/DP/280/209, VP5.70Si/XDP/280/209 & MC350MPI/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	11	18	8	30
3000	24	42	11	42
3500	31	50	14	53
4000	35	58	17	64
4500	37	63	20	76
WOT	41	66	23	87

FUEL FLOW DATA - 278 VISTA W/ VP5.7GXi/DP/320/239, VP5.70Si/XDP/320/239 & MCMX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	8	13	6	23
2500	11	18	8	30
3000	24	42	11	42
3500	31	50	14	53
4000	35	58	17	64
4500	38	61	20	76
WOT	42	68	24	91



FUEL FLOW DATA - 278 VISTA W/ VP8.1Gi/DP/375/280, VP8.1OSi/XDP/375/280

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	15	7	27
2500	13	21	10	38
3000	30	48	12	45
3500	35	56	16	53
4000	40	64	21	79
4500	44	71	26	98
WOT	45	72	30	113

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



278 VISTA OPTIONS

HULL/DECK

- Flexiteek swim platform
- Light, spot/flood, remote
- Radar arch
- Sunpads, deck
- Windlass w/rope, chain and anchor

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone[‡]
- All White[‡]

COCKPIT

- Carpet, cockpit, delete
- Cushion, aft fill-in

HELM AREA

- Navigation Package:
Includes Raymarine VHF-48, RC435 GPS/Plotter
- Steering wheel, woodgrain/sandstone
- VHF radio

ENTERTAINMENT

- CD changer, 6-disc
- Stereo remote w/ display @ transom
- Stereo upgrade includes: Clarion® amplifier, 10" subwoofer & tweeters
- TV, flat screen and DVD player, cabin

CABIN & GALLEY

- Air conditioning/heating
- Pillow package
- Stove alcohol/electric

Interior

Fabric Scheme

- Black Stone
- Natural Shell
- Nautical Blue

HEAD AND

SHOWER AREA

- Gray water system w/holding tank
- Head, overboard discharge
- Head, Vacu-flush
- Tank level indicators

ENGINE/

SYSTEMS/DRIVE

- Engine flush-out kit (NA w/Neutra-Salt system)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Gas vapor detector
- Generator, (includes AC) 5kw @110VAC, 4kw @230 VAC (NA w/Gray water system)
- Neutra-Salt system*

CANVAS

- Cockpit cover
- Cockpit cover w/arch

TRAILER

- Tandem axle trailer w/1 axle brake - Die cut logo in fender
- Brakes, tandem
- Galvanized trailer w/GatorHyde™
- Rugged duty towing package includes heavy duty tires and electric brakes
- Spare tire & wheel
- Spare tire & wheel - aluminum or galvanized
- Wheel, aluminum

CUSTOMER CARE

- Sea Key system

POWER Volvo Penta

- 5.7 Gi/DP 280 hp
- 5.7 OSi/XDP 280 hp
- 5.7 GXi/DP 320 hp
- 5.7 OSXi/XDP 320 hp
- 8.1 Gi/DP 375 hp
- 8.1 OSi/XDP 375 hp

POWER MerCruiser

- 350 MPI/Bravo III 300 hp
- MX 6.2 Bravo III 320 hp

* NA w/MerCruisers; standard w/Ocean Series

‡ Standard

318 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	33'0"	10.06 m
Maximum Sleeping Depth (V-Berth):	80"	2.03 m
Maximum Sleeping Width (V-Berth):	74"	1.88 m
Maximum Sleeping Depth (Mid Cabin):	72"	1.83 m
Maximum Sleeping Width (Mid Cabin):	52"	1.32 m
Beam:	10'9"	3.28 m
Keel to W/S Shelf:	7'3"	2.21 m
Keel to Top of Windshield:	9'5"	2.87 m
Total Height:	12'2" w/arch	3.71 m
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	10'6" w/arch	3.20 m
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	29"	74 cm
Headroom (max):	6'5"	1.96 m
Freeboard (min.):	47"	1.19 m
Draft (drive down):	38"	97 cm
Draft (drive up):	26"	66 cm
Fuel:	170 gal	644 L
Potable Water:	35 gal	132 L
Holding:	27 gal	104 L
Passengers:	11	11
Maximum Capacity:	Yacht	Yacht
Air Conditioning/heater:	10,000 BTU	10,000BTU

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
Twin MC4.3MPI/B3	220 ea	164 ea	10960	4970
Twin VP4.3GX/DP	225 ea	168 ea	10960	4970
Twin VP4.30Si/XDP	225 ea	168 ea	10920	4950
Twin MC5.0MPI/B3	260 ea	194 ea	11160	5060
Twin VP5.0GX/DP	270 ea	201 ea	11200	5080
Twin VP5.00Si/XDP	270 ea	201 ea	11100	5030
Twin VP5.7Gi/DP	280 ea	209 ea	11200	5080
Twin VP5.70Si/XDP	280 ea	209 ea	11100	5030
Twin 350MPI/B3	300 ea	224 ea	11160	5060

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
LBS						
318V	Twin 5.0GX/DP	9120	2080	180	1020	750
KG						
318V	Twin 5.0GX/DP	4137	943	82	463	344

PERFORMANCE

Power HP/KW	Propeller (Dia x Pitch)		Top Speed		Cruise Range		
	IN	CM	MPH	KPH	MI	KM	
TwinMC4.3MPI/B3/220/164	22	56	SST	38-41	61-66	240	390
TwinVP4.3GX/DP/225/168	F5	F5	SST	39-42	63-68	240	390
TwinVP4.30Si/XDP/25/168	F5	F5	SST	38-41	61-66	240	390
TwinMC5.0MPI/B3/260/194	22	56	SST	41-44	66-71	240	390
TwinVP5.0GX/DP/270/201	F4	F4	SST	42-45	68-72	240	390
Twin VP5.00Si/XDP/270/201	F4	F4	SST	41-44	66-71	240	390
TwinVP5.7Gi/DP/280/209	F5	F5	SST	45-48	72-77	240	390
TwinVP5.70Si/XDP/280/209	F5	F5	SST	44-47	71-76	240	390
TwinMC350MPI/B3/300/224	24	61	SST	45-48	72-77	240	390

FUEL FLOW DATA - 318 VISTA W/ TWIN VP4.3GX/DP/225/168, VP4.30Si/XDP/225/168 & MC4.3MPI/B3/220/164

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	14	7	26
2500	12	19	12	45
3000	23	37	16	60
3500	29	47	20	76
4000	34	55	26	98
4500	38	61	32	121
WOT	40	64	36	136

FUEL FLOW DATA - 318 VISTA W/ TWIN VP5.0GX/DP/270/201, VP5.00Si/DP/270/201 & MC5.0MPI/B3/260/194

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	8	30
2500	19	31	12	45
3000	26	42	14	53
3500	30	48	19	72
4000	37	60	22	83
4500	41	66	32	121
WOT	43	69	40	151



FUEL FLOW DATA - 318 VISTA W/ TWIN VP5.7Gi/DP/280/209, VP5.7QSi/XDP/280/209 & MC350/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	9	34
2500	19	31	14	53
3000	26	42	18	68
3500	31	50	24	91
4000	38	61	30	114
4500	43	69	38	144
WOT	46	74	46	174

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



318 VISTA OPTIONS

HULL/DECK

- Flexiteek swim platform
- Light, spot/flood, remote
- Sunpads, deck
- Windlass w/rope, chain and anchor
- Windshield header, stainless steel

GEL COAT COLOR SCHEME

- Classic Color Band
- Two tone
- All White

COCKPIT

- Carpet, cockpit, delete
- Flexiteek cockpit
- Refrigerator, cockpit (exchange for icemaker)

HELM AREA

- Navigation Package I: Includes Raymarine C80 GPS/Chartplotter/Depth/VHF-215
- Navigation Package II: Includes Nav. Package I and 2kw Raydome

ENTERTAINMENT

- CD changer, 6-disc
- Stereo remote w/display @ transom
- Stereo upgrade includes: Clarion® amplifier, 10" subwoofer & tweeters

CABIN & GALLEY

- Mattress, innerspring (V-berth)
- Stove alcohol/electric

INTERIOR FABRIC SCHEME

- Black Stone
- Natural Shell
- Nautical Blue

HEAD AND SHOWER AREA

- Gray water system w/holding tank
- Head, overboard discharge

ENGINE/SYSTEMS/DRIVE

- Engine flush-out kit (NA w/Neutra-Salt system)
- Fire extinguishing system
- Fresh water cooling (OSI)
- Gas vapor detector
- Generator, 5kw @110VAC, 4kw @230 VAC
- Neutra-Salt system*

CANVAS

- Cockpit cover

CUSTOMER CARE

- Sea Key system

POWER Volvo Penta

- Twin 4.3 GXi/DP 225 hp
- Twin 4.3 OSi/XDP 225 hp
- Twin 5.0 GXi/DP 270 hp
- Twin 5.0 OSi/XDP 270 hp
- Twin 5.7 Gi/DP 280 hp
- Twin 5.7 OSi/XDP 280 hp

POWER MerCruiser

- Twin 4.3 MPI/Bravo III 220 hp
- Twin 5.0 MPI/Bravo III 260 hp
- Twin 350 MPI/Bravo III 300 hp

* NA w/MerCruisers; standard w/Ocean Series

3 2 8 V I S T A

SPECIFICATIONS*	US	METRIC
LOA:	35'11"	10.69 m
Length w/o Swim Platform:	32'11"	10.03 m
Maximum Sleeping Depth (V-Berth):	76"	1.93 m
Maximum Sleeping Width (V-Berth):	94"	2.39 m
Maximum Sleeping Depth (Mid Cabin):	77"	1.96 m
Maximum Sleeping Width (Mid Cabin):	66"	1.68 m
Beam:	11'9"	3.58 m
Keel to W/S Shelf:	7'11"	2.41 m
Keel to top of Windshield:	9'4"	2.85 m
Total Height:	11'8" w/arch	3.56 m w/arch
Transom Angle:	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	9'6" w/arch	2.90 m w/arch
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	26'/37"	66/94 cm
Headroom (max):	6'2"	1.88 m
Freeboard (min.):	45"	1.14 m
Draft (drive down):	39"	99 cm
Draft (drive up):	28"	71 cm
Fuel:	220 gal	833 L
Potable Water:	45 gal	170 L
Holding:	28 gal	106 L
Passengers:	12	12
Maximum Capacity:	Yacht	Yacht
Air conditioning/heater	12,000 BTU	12,000 BTU

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
Twin VP5.7Gi/DP	280 ea	209 ea	12500	5670
Twin VP5.70Si/XDP	280 ea	209 ea	12500	5670
Twin MC350MPI/B3	300 ea	224 ea	12500	5670
Twin VP5.7GXi/DP	320 ea	239 ea	12500	5670
Twin VP5.70SXi/XDP	320 ea	239 ea	12500	5670
Twin MCMX6.2/B3	320 ea	239 ea	12500	5670

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
LBS						
328V	Twin VP5.7Gi/DP	10420	2080	180	1320	1000
KG						
328V	Twin VP5.7Gi/DP	4730	943	82	599	454

PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin VP5.7Gi/DP/280/209	F5	F5	SST	43-46	69-74	280	450
Twin VP5.70Si/XDP/280/209	F5	F5	SST	42-45	68-72	280	450
Twin MC350MPI/B3/300/224	24	61	SST	42-45	68-72	280	450
Twin VP5.7GXi/DP/320/239	F5	F5	SST	44-47	71-76	280	450
Twin VP5.70SXi/XDP/320/239	F5	F5	SST	43-46	69-74	280	450
Twin MCMX6.2/B3/320/239	24	61	SST	43-46	69-74	280	450

FUEL FLOW DATA - 328 VISTA W/ TWIN VP5.7Gi/DP/280/209, VP5.70SXi/XDP/280/209 & MC350/B3/300/224

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	10	38
2500	17	27	15	57
3000	26	42	20	76
3500	32	52	25	95
4000	37	60	32	121
4500	42	68	39	147
WOT	44	71	46	174

FUEL FLOW DATA - 328 VISTA W/ TWIN VP5.7GXi/DP/320/239, VP5.70SXi/XDP/320/239 & MX6.2/B3/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	10	16	10	38
2500	17	27	15	57
3000	26	42	20	76
3500	32	52	25	95
4000	37	60	33	125
4500	42	68	40	151
WOT	45	72	48	181

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



328 VISTA OPTIONS

HULL/DECK

- Flexiteek swim platform
- Sunpads, deck
- Windshield header, stainless steel

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone
- All White

COCKPIT

- Carpet, cockpit, delete
- Flexiteek cockpit
- Refrigerator, exchange for icemaker

HELM AREA

- Navigation Package I: Includes Raymarine C70 GPS/Plotter/Depth/Radar, VHF-215
- Navigation Package II: Includes Nav. Package I and 2kw Raydome

ENTERTAINMENT

- CD changer, 6-disc
- Stereo remote w/ display @ transom

CABIN & GALLEY

- Mattress, innerspring (V-berth)
- Stove alcohol/electric

INTERIOR

FABRIC SCHEME

- Black Stone
- Natural Shell
- Nautical Blue

HEAD AND

SHOWER AREA

- Gray water system w/holding tank
- Head, additional 30-gallon holding tank
- Head, overboard discharge

ENGINE/

SYSTEMS/DRIVE

- Engine flush-out kit (NA w/Neutra-Salt system)
- Fresh water cooling (OSI)
- Gas vapor detector
- Generator, 5kw @110VAC, 4kw @230 VAC
- Neutra-Salt system*

CANVAS

- Cockpit cover

CUSTOMER CARE

- Sea Key system

POWER Volvo Penta

- Twin 5.7 Gi/DP 280 hp
- Twin 5.7 OSi/XDP 280 hp
- Twin 5.7 GXi/DP 320 hp
- Twin 5.7 OSXi/XDP 320 hp

POWER MerCruiser

- Twin 350 MPI/Bravo III 300hp
- Twin MX 6.2/Bravo III 320 hp

* NA w/MerCruisers; standard w/Ocean Series



FAST FACTS NOTES

3 4 8 V I S T A

SPECIFICATIONS*

	US	METRIC
LOA:	37'0"	11.28 m
Maximum Sleeping Depth (V-Berth):	74"	1.88 m
Maximum Sleeping Width (V-Berth):	78"	1.98 m
Maximum Sleeping Depth (Mid Cabin):	72"	1.83 m
Maximum Sleeping Width (Mid Cabin):	66"	1.68 m
Beam:	12'0"	3.66 m
Keel to Top of Windshield:	9'4"	2.85 m
Keel to W/S Shelf:	7'11"	2.41 m
Total Height:	12'5" w/arch	3.78 m w/arch
Transom Angle (Sterndrive):	15°	15°
Deadrise:	19°	19°
Bridge Clearance:	10'3" w/arch	3.13 m w/arch
Cockpit Height (stern):	28"	71 cm
Cockpit Height (helm):	30"/44"	76/112 cm
Headroom (max):	6'4"	1.93 m
Freeboard (min.):	45"	1.14 m
Draft:	40"	102 cm
Fuel:	230 gal	871 L
Potable Water:	51 gal	193 L
Holding:	30 gal	113 L
Passengers:	12	12
Maximum Capacity:	Yacht	Yacht
Generator:	5.0 kw @ 110 VAC 4.0 kw @ 220 VAC	
Air Conditioning/heater:	12,000 BTU	12,000 BTU

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft HP	Power KW	Boat & Engine Weights LBS	KG
Twin VP5.7Gi/DP	280 ea	209 ea	14500	6580
Twin VP5.70Si/XDP	280 ea	209 ea	14500	6580
Twin MC350MPI/B3	300 ea	224 ea	14500	6580
Twin MCMX6.2/B3	320 ea	239 ea	14500	6580
Twin VP5.7GXi/DP	320 ea	239 ea	14500	6580
Twin VP5.70SXi/XDP	320 ea	239 ea	14500	6580
Twin MCMX6.2	320 ea	239 ea	14800	6710
Twin VP5.7GXi	320 ea	239 ea	14800	6710
Twin CR6.0MPI	375 ea	280 ea	14800	6710

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
LBS						
348V	Twin VP5.7GXi	12720	2080	180	1380	1000
KG						
348V	Twin VP5.7GXi	5770	943	82	626	454

PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch) IN CM	Type	Top Speed		Cruise Range		
			MPH	KPH	MI	KM	
Twin VP5.7Gi/DP/280/209	F4	F4	SST	40-43	64-69	210	340
Twin VP5.70Si/XDP/280/209	F4	F4	SST	38-41	61-66	210	340
Twin MC350MPI/B3/300/224	22	56	SST	40-43	64-69	210	340
Twin VP5.7GXi/DP/320/239	F4	F4	SST	41-44	68-71	210	340
Twin VP5.70SXi/XDP/320/239	F4	F4	SST	39-42	63-68	210	340
Twin MCMX6.2/B3/320/224	22	56	SST	41-44	68-71	210	340
Twin MCMX6.2/320/239	18x24	46x61	Nibral	34-37	55-60	170	270
Twin VP5.7GXi/320/239	18x24	46x61	Nibral	34-37	55-60	170	270
Twin CR6.0MPI/375/280	18x25	46x64	Nibral	36-39	58-63	170	270

FUEL FLOW DATA - 348 VISTA W/ TWIN VP5.7Gi/DP/280/209, VP5.70Si/XDP/280/209 & MC350/B3/300/224

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	10	38
2500	17	27	15	57
3000	25	40	20	76
3500	31	50	25	95
4000	36	58	32	121
4500	39	63	39	147
WOT	41	66	46	174

FUEL FLOW DATA - 348 VISTA W/ TWIN VP5.7GXi/DP/320/239, VP5.70Si/XDP/320/239 & MX6.2/B3/320/239

Engine Speed - RPM	Boat Speed MPH	KPH	Fuel Flow GPH	LPH
2000	10	16	10	38
2500	17	17	15	57
3000	25	40	20	76
3500	31	50	25	95
4000	36	58	33	125
4500	40	64	40	151
WOT	42	68	48	181



FUEL FLOW DATA - 348 VISTA W/ TWIN VP5.7GX/320/239 & MCMX6.2/320/239

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	10	38
2500	16	26	18	68
3000	23	37	25	95
3500	28	45	30	113
4000	32	52	36	136
4500	34	55	42	159
WOT	36	58	48	181

FUEL FLOW DATA - 348 VISTA W/ TWIN CR6.0MPI/375/290

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	11	18	10	38
2500	16	26	18	68
3000	23	37	25	95
3500	29	47	30	113
4000	33	53	36	136
4500	35	56	42	159
5000	37	60	48	181
WOT	38	61	54	204

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



348 VISTA OPTIONS

HULL/DECK

- Flexiteek swim platform
- Sunpads, deck
- Windshield header, stainless steel

GEL COAT COLOR SCHEME

- Classic Color Band
- Two tone
- All White

COCKPIT

- Carpet, cockpit, delete
- Flexiteek cockpit
- Refrigerator, exchange for icemaker

HELM AREA

- Navigation Package I: Includes Raymarine C80 GPS/Plotter/Depth/Radar w/2kw Radome, VHF-215
- Navigation Package II: Includes Nav. Package I and ST6001 Autopilot (inboard only)

ENTERTAINMENT

- Stereo remote w/ display @ transom
- TV, flat screen (mid cabin)

CABIN & GALLEY

- Central vacuum cleaner
- Mattress, innerspring (V-berth)
- Private stateroom

INTERIOR

FABRIC SCHEME

- Black Stone
- Natural Shell
- Nautical Blue

HEAD AND

SHOWER AREA

- Gray water system w/holding tank
- Head, overboard discharge

ENGINE/ SYSTEMS/DRIVE

- Engine flush-out kit (NA w/Neutra-Salt system)
- Fresh water cooling (OSI)
- Gas vapor detector
- Neutra-Salt system*
- Spare shaft w/coupler & propellers

CANVAS

- Cockpit cover

CUSTOMER CARE

- Sea Key system

POWER Inboard

- Volvo Penta
 - Twin 5.7 GXi 320 hp
- MerCruiser
 - Twin MX 6.2 320 hp
- Crusader
 - Twin 6.0 MPI 375 hp

POWER Sterndrive

- MerCruiser
 - Twin 350 MPI/Bravo III 370 hp
 - Twin MX 6.2/Bravo III 320 hp

Volvo Penta

- Twin 5.7 Gi/DP 280 hp
- Twin 5.7 OSi/XDP 280 hp
- Twin 5.7 GXi/DP 320 hp
- Twin 5.7 OSXi/XDP 320 hp

* NA w/MerCruisers; standard w/Ocean Series

378 VISTA

SPECIFICATIONS*	US	METRIC
LOA:	41'3"	12.57 m
Length w/o Swim Platform:	37'9"	11.51 m
Maximum Sleeping Depth (V-Berth):	80"	2.03 m
Maximum Sleeping Width (V-Berth):	66"	1.68 m
Maximum Sleeping Depth (Mid Cabin):	62"	1.57 m
Maximum Sleeping Width (Mid Cabin):	81"	2.06 m
Beam:	12'9"	3.89 m
Keel to W/S Shelf:	9'3"	2.82 m
Keel to Top of Windshield:	10'11"	3.33 m
Total Height:	13'4" w/arch	4.07 m w/arch
Deadrise:	19'	19"
Bridge Clearance:	11'6" w/arch	3.51 m w/arch
Cockpit Height (stern):	30"	76 cm
Cockpit Height (helm):	25"	64 cm
Headroom (max):	6'5"	1.96 m
Freeboard (min.):	58"	1.47 m
Draft (static):	42"	107 cm
Fuel:	300 gal	1136 L
Potable Water:	66 gal	250 L
Holding:	42 gal	159 L
Gray Water:	45 gal	170 L
Passengers:	14	14
Maximum Capacity:	Yacht	Yacht
Air Conditioning/Heater:	16,000 BTU	16,000 Btu
Generator: gasoline	7.3 kw @ 110 VAC	
	6.5 kw @ 220 VAC	
diesel	8.0 kw @ 110 VAC	
	6.5 kw @ 220 VAC	

*Dimensional diagram is located on page 167.

POWER RATINGS & WEIGHTS

Engine Type	Propshaft Power		Boat & Engine Weights	
	HP	KW	LBS	KG
Twin VPIPS400	295 ea	220 ea	20800	9440
Twin VPIPS500	352 ea	262 ea	20800	9450
Twin VPD6-370	362 ea	270 ea	20100	9120
Twin MC8.1S	370 ea	276 ea	18500	8390
Twin VP8.1Gi	375 ea	280 ea	18500	8390
Twin CAT3126	385 ea	287 ea	21300	9660

RECOMMENDED ENGINE(S)/EQUIPMENT AVG. WEIGHTS

Model	Eng. Type	Boat	Eng.	Battery	Fuel	Access.
LBS						
378V	Twin VP8.1Gi	16160	2340	240	1800	1300
KG						
378V	Twin VP8.1Gi	7330	1060	109	816	590

PERFORMANCE

Power HP / KW	Propeller (Dia x Pitch)		Type	Top Speed		Cruise Range	
	IN	CM		MPH	KPH	MI	KM
Twin VPIPS400/295/220	T3	T3	Nibral	35-37	52-55	320	520
Twin VPIPS500/352/262	T6	T6	Nibral	41-43	66-69	320	520
Twin VPD6-362/272	22x24	56x61	Nibral	34-36	54-58	320	520
Twin MC8.1S/370/276	21x24	53x61	Nibral	35-37	56-60	220	350
Twin VP8.1Gi/375/280	21x24	53x61	Nibral	35-37	56-60	220	350
Twin CAT3126/385/287	22x28	56x71	Nibral	36-38	58-61	320	520

FUEL FLOW DATA - 378 VISTA W/ TWIN VPD6-370/365/272

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1000	7	11	2	8
1500	10	16	5	19
2000	13	21	13	49
2500	22	35	19	72
3000	31	50	29	110
3500	34	54	38	144
WOT	35	56	41	155

FUEL FLOW DATA - 378 VISTA W/ TWIN VP8.1Gi/375/280 & MC8.1S/370/276

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
2000	9	14	11	42
2500	10	16	18	68
3000	18	29	23	87
3500	24	39	28	106
4000	30	48	36	136
4500	33	53	56	213
WOT	35	56	62	234

FUEL FLOW DATA - 378 VISTA W/ TWIN CAT3126/385/287

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1000	8	13	5	19
1500	11	18	13	49
2000	22	35	22	83
2500	33	53	28	106
WOT	37	60	41	155



FUEL FLOW DATA - 378 VISTA W/ TWIN VP IPS 400/295/220

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1000	7	11	2	8
1500	10	16	5	19
2000	13	21	12	45
2500	23	37	18	68
3000	29	47	24	91
3500	35	56	31	117
WOT	36	58	34	129

FUEL FLOW DATA - 378 VISTA W/ TWIN VP IPS 500/352/262

Engine Speed - RPM	Boat Speed		Fuel Flow	
	MPH	KPH	GPH	LPH
1000	7	11	2	8
1500	10	16	5	19
2000	15	24	14	53
2500	26	42	19	72
3000	34	56	28	106
3500	40	64	38	144
WOT	42	68	42	159

Performance and Fuel Flows may vary widely due to Boat Weight, Load, Atmospheric Conditions, Engine Conditions, Weight Distribution, Sea Conditions, Propeller, Boat Bottom Condition, Trim Angle and Operator Technique.



378 VISTA OPTIONS

HULL/DECK

- Bow thruster
- Flexiteek swim platform
- Hard top
- Sunpads, deck, Sunbrella™

GEL COAT

COLOR SCHEME

- Classic Color Band
- Two tone
- All White

COCKPIT

- Aft seat storage box
- Carpet, cockpit, delete
- Flexiteek cockpit

HELM AREA

- Navigation Package: Includes Raymarine C80 GPS/Plotter/Depth/Radar w/4kw Raydome, VHF-215 and ST6001 Autopilot

ENTERTAINMENT

- Satellite TV system (hard top only)

CABIN & GALLEY

- Freezer, exchange for refrigerator
- Private stateroom

INTERIOR

FABRIC SCHEME

- Black Stone
- Natural Shell
- Nautical Blue

HEAD AND

SHOWER AREA

- Gray water system w/holding tank
- Head, overboard discharge

ENGINE/

SYSTEMS/DRIVE

- Spare shaft w/coupler & propellers

CANVAS

- Cockpit cover

CUSTOMER CARE

- Sea Key system

POWER Volvo Penta®

- Twin 8.1 Gi 375 hp
- Twin D6-370 370hp
- Twin IPS 400 (diesel)
- Twin IPS 500(diesel)

POWER MerCruiser®

- Twin 8.1 S 370 hp

POWER Caterpillar®

- Twin 3126 385 hp



180 HORIZON Single Axle Trailer

	(Model#D0180BS)	
	US	METRIC
Length w/ Tongue	20'10"	6.35 m
Length w/ Tongue Folded	17'5"	5.31 m
Length w/ Boat	24'2"	7.37 m
Width	8'0"	2.44 m
Empty Weight w/ spare	755 lbs	343 kg
Carrying Capacity	2,744 lbs	1,244 kg
GVWR (Gross Vehicle Weight Rating)	3,500 lbs	1,588 kg
GAWR (Gross Axle Weight Rating)	3,500 lbs	1,588 kg
Height (Top of Windshield w/ Boat on Trailer)	6'2"	1.88 m
Height (Rugged Tow)	6'3 1/2"	1.92 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Single	Single
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	18 1/2"	47 cm
Ball Towing Height (Rugged tow)	20"	51 cm



180 HORIZON w/ V6 Single Axle Trailer

	(Model#D0180BSV6)	
	US	METRIC
Length w/ Tongue	20'10"	6.35 m
Length w/ Tongue Folded	17'5"	5.31 m
Length w/ Boat	24'2"	7.37 m
Width	8'0"	2.44 m
Empty Weight w/ spare	831 lbs	377 kg
Carrying Capacity	4,169 lbs	1,891 kg
GVWR (Gross Vehicle Weight Rating)	5,000 lbs	2,268 kg
GAWR (Gross Axle Weight Rating)	5,000 lbs	2,268 kg
Height (Top of Windshield w/ Boat on Trailer)	6'3"	1.91 m
Height (Rugged Tow)	6'3"	1.91 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Single	Single
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	24"	61 cm
Ball Towing Height (Rugged tow)	24"	61 cm



183 HORIZON F&S Single Axle Trailer

	(Model#D0183ES)	
	US	METRIC
Length w/ Tongue	20'10"	6.35 m
Length w/ Tongue Folded	17'5"	5.31 m
Length w/ Boat	24'2"	7.37 m
Width	8'0"	2.44 m
Empty Weight w/ spare	960 lbs	435 kg
Carrying Capacity	4,041 lbs	1,833 kg
GVWR (Gross Vehicle Weight Rating)	5,000 lbs	2,268 kg
GAWR (Gross Axle Weight Rating)	5,000 lbs	2,268 kg
Height (Top of Windshield w/ Boat on Trailer)	6'2"	1.88 m
Height (Rugged Tow)	6'3 1/2"	1.92 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Single	Single
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5 1/2" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	24"	61 cm
Ball Towing Height (Rugged tow)	24"	61 cm



183 HORIZON F&S Tandem Axle Trailer

	(Model#D0183ET)	
	US	METRIC
Length w/ Tongue	20'10"	6.35 m
Length w/ Tongue Folded	17'5"	5.31 m
Length w/ Boat	24'2"	7.37 m
Width	8'0"	2.44 m
Empty Weight w/ spare	1,075 lbs	488 kg
Carrying Capacity	5,927 lbs	2,688 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	6'6"	1.98 m
Height (Rugged Tow)	6'7 1/2"	2.02 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 225/75R14-C
Tire Pressure (Standard)	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4 1/2" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22 1/2"	57 cm



190 HORIZON Single Axle Trailer

	(Model# D0190CS)	
	US	METRIC
Length w/ Tongue	20'10"	6.35 m
Length w/ Tongue Folded	17'5"	5.31 m
Length w/ Boat	24'2"	7.37 m
Width	8'0"	2.44 m
Empty Weight w/ spare	960 lbs	435 kg
Carrying Capacity	4,041 lbs	1,833 kg
GVWR (Gross Vehicle Weight Rating)	5,000 lbs	2,268 kg
GAWR (Gross Axle Weight Rating)	5,000 lbs	2,268 kg
Height (Top of Windshield w/ Boat on Trailer)	6'6"	1.98 m
Height (Rugged Tow)	6'7½"	2.02 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Single	Single
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	24"	61 cm
Ball Towing Height (Rugged tow)	24"	61 cm



190 HORIZON Tandem Axle Trailer

	(Model# D0190CT)	
	US	METRIC
Length w/ Tongue	20'10"	6.35 m
Length w/ Tongue Folded	17'5"	5.31 m
Length w/ Boat	24'2"	7.37 m
Width	8'0"	2.44 m
Empty Weight w/ spare	1,073 lbs	488 kg
Carrying Capacity	5,927 lbs	2,688 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	6'6"	1.98 m
Height (Rugged Tow)	6'7½"	2.02 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm

200 HORIZON Single Axle Trailer

	(Model #D0200VS)	
	US	METRIC
Length w/ Tongue	21'5"	6.53 m
Length w/ Tongue Folded	18'0"	5.49 m
Length w/ Boat	24'9"	7.54 m
Width	8'6"	2.59 m
Empty Weight w/ spare	930 lbs	422 kg
Carrying Capacity	4,075 lbs	1,848 kg
GVWR (Gross Vehicle Weight Rating)	5,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	5,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	7'0"	2.13 m
Height (Rugged Tow)	7'0"	2.13 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Single	Single
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	24"	61 cm
Ball Towing Height (Rugged tow)	24"	61 cm

200 HORIZON Tandem Axle Trailer

	(Model #D0200VT)	
	US	METRIC
Length w/ Tongue	21'5"	6.53 m
Length w/ Tongue Folded	18'0"	5.49 m
Length w/ Boat	24'9"	7.54 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,160 lbs	526 kg
Carrying Capacity	5,843 lbs	2,650 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	7'0"	2.13 m
Height (Rugged Tow)	7'1½"	2.16 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm



203 HORIZON F&S Single Axle Trailer

	(Model # D0203GS)	
	US	METRIC
Length w/ Tongue	21'5"	6.53 m
Length w/ Tongue Folded	18'0"	5.49 m
Length w/ Boat	24'9"	7.54 m
Width	8'6"	2.59 m
Empty Weight w/ spare	930 lbs	422 kg
Carrying Capacity	4,075 lbs	1,848 kg
GVWR (Gross Vehicle Weight Rating)	5,000 lbs	2,268 kg
GAWR (Gross Axle Weight Rating)	5,000 lbs	2,268 kg
Height (Top of Windshield w/ Boat on Trailer)	7'0"	2.13 m
Height (Rugged Tow)	7'0"	2.13 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 205/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Single	Single
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	24"	61 cm
Ball Towing Height (Rugged tow)	24"	61 cm



203 HORIZON F&S Tandem Axle Trailer

	(Model # D0203GT)	
	US	METRIC
Length w/ Tongue	21'5"	6.53 m
Length w/ Tongue Folded	18'0"	5.49 m
Length w/ Boat	24'9"	7.54 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,160 lbs	526 kg
Carrying Capacity	5,843 lbs	2,650 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	7'0"	2.13 m
Height (Rugged Tow)	7'1½"	2.16 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm



210 HORIZON Tandem Axle Trailer

(Model # D0210WT)

	US	METRIC
Length w/ Tongue	22'9"	6.93 m
Length w/ Tongue Folded	19'4"	5.89 m
Length w/ Boat	26'1"	7.96 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,160 lbs	526 kg
Carrying Capacity	5,843 lbs	2,650 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	7'0"	2.13 m
Height (Rugged Tow)	7'1½"	2.16 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm



220 HORIZON Tandem Axle Trailer

(Model # D0220AT)

	US	METRIC
Length w/ Tongue	22'9"	6.93 m
Length w/ Tongue Folded	19'3"	5.87 m
Length w/ Boat	26'1"	7.96 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,240 lbs	563 kg
Carrying Capacity	5,765 lbs	2,615 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	7'0"	2.13 m
Height (Rugged Tow)	7'1½"	2.16 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm



240 HORIZON Tandem Axle Trailer

(Model # D0240HT)

	US	METRIC
Length w/ Tongue	23'1"	7.4 m
Length w/ Tongue Folded	19'8"	5.99 m
Length w/ Boat	27'1"	8.25 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,440 lbs	653 kg
Carrying Capacity	5,560 lbs	2,522 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	8'1"	2.46 m
Height (Rugged Tow)	8'2½"	2.5 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	2,600 lbs	1,179 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm



260 HORIZON Tandem Axle Trailer

	(Model # D0260JT)	
	US	METRIC
Length w/ Tongue	26'4"	8.03 m
Length w/ Tongue Folded	21'8"	6.60 m
Length w/ Boat	31'0"	9.45 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,450 lbs	658 kg
Carrying Capacity	8,550 lbs	3,881 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,535 kg
GAWR (Gross Axle Weight Rating)	10,000 lbs	4,535 kg
Height (Top of Windshield w/ Boat on Trailer)	8'3"	2.51 m
Height (Rugged Tow)	8'3"	2.51 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	2,600 lbs	1,179 kg
Ball Size	2 5/16"	6 cm
Ball Towing Height	24½"	62.23 cm
Ball Towing Height (Rugged tow)	24½"	62.23 cm



290 HORIZON Tandem Axle Trailer

(Model # D0290ESE)

	US	METRIC
Length w/ Tongue	29'3"	8.92 m
Length w/ Tongue Folded	24'7"	7.50 m
Length w/ Boat	33'3"	10.13 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,902 lbs	863 kg
Carrying Capacity	9,098 lbs	4,126 kg
GVWR (Gross Vehicle Weight Rating)	11,000 lbs	4,989 kg
GAWR (Gross Axle Weight Rating)	11,000 lbs	4,989 kg
Height (Top of Windshield w/ Boat on Trailer)	8'9"	2.82 m
Height (Rugged Tow)	8'9"	2.82 m
Tire Size / Range (Standard)	ST 225/75R15-E	ST 225/75R15-E
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	80 PSI COLD	550 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	5,500 lbs	2,494 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	2,600 lbs	1,179 kg
Ball Size	2½"	6 cm
Ball Towing Height	21½"	54.6 cm
Ball Towing Height (Rugged tow)	21½"	54.6 cm



290 HORIZON Tri-Axle Trailer

(Model # D0290ETE)

	US	METRIC
Length w/ Tongue	29'3"	8.92 m
Length w/ Tongue Folded	24'7"	7.50 m
Length w/ Boat	33'3"	10.13 m
Width	8'6"	2.59 m
Empty Weight w/ spare	2,185 lbs	991 kg
Carrying Capacity	12,815 lbs	5,812 kg
GVWR (Gross Vehicle Weight Rating)	15,000 lbs	6,803 kg
GAWR (Gross Axle Weight Rating)	15,000 lbs	6,803 kg
Height (Top of Windshield w/ Boat on Trailer)	8'9"	2.82 m
Height (Rugged Tow)	8'9"	2.82 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tri-Axle	Tri-Axle
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	3,200 lbs	1,451 kg
Ball Size	2 5/16"	6 cm
Ball Towing Height	21½"	54.6 cm
Ball Towing Height (Rugged tow)	21½"	54.6 cm



204 FUNSHIP Tandem Axle Trailer

	(Model #D0204KT)	
	US	METRIC
Length w/ Tongue	22'8"	6.91 m
Length w/ Tongue Folded	19'3"	5.87 m
Length w/ Boat	26'0"	7.92 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,330 lbs	603 kg
Carrying Capacity	5,675 lbs	2,574 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	7'6"	2.29 m
Height (Rugged Tow)	7'7½"	2.32 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm



224 FUNSHIP Tandem Axle Trailer

(Model # D0224MT)

	US	METRIC
Length w/ Tongue	22'8"	6.91 m
Length w/ Tongue Folded	19'3"	5.87 m
Length w/ Boat	26'0"	7.92 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,330 lbs	603 kg
Carrying Capacity	5,675 lbs	2,574 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	7'4"	2.24 m
Height (Rugged Tow)	7'5½"	2.27 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm



244 FUNSHIP Tandem Axle Trailer

	244 (T) Funship (Model #D0244NT)	
	US	METRIC
Length w/ Tongue	25'5"	7.75 m
Length w/ Tongue Folded	20'9"	6.32 m
Length w/ Boat	28'9"	8.76 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,790 lbs	812 kg
Carrying Capacity	8,214 lbs	3,725 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,535 kg
GAWR (Gross Axle Weight Rating)	10,000 lbs	4,535 kg
Height (Top of Windshield w/ Boat on Trailer)	8'1"	2.46m
Height (Rugged Tow)	8'1"	2.46 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R14-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	2,600 lbs	1,179 kg
Ball Size	2 5/16"	6 cm
Ball Towing Height	24½"	62.23 cm
Ball Towing Height (Rugged tow)	24½"	62.23 cm



274 FUNSHIP Tandem Axle Trailer

(Model # D0274XT)

	US	METRIC
Length w/ Tongue	30'8"	9.35 m
Length w/ Tongue Folded	26'0"	7.92 m
Length w/ Boat	34'8"	10.57 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,860 lbs	844 kg
Carrying Capacity	8,214 lbs	3,726 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,535 kg
GAWR (Gross Axle Weight Rating)	10,000 lbs	4,535 kg
Height (Top of Windshield w/ Boat on Trailer)	8'4"	2.54 m
Height (Rugged Tow)	8'4"	2.54 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	2,600 lbs	1,179 kg
Ball Size	2 5/16"	6 cm
Ball Towing Height	24½"	62.23 cm
Ball Towing Height (Rugged tow)	24½"	62.23 cm



215 SUNDOWNER Tandem Axle Trailer

	(Model # D0215RT)	
	US	METRIC
Length w/ Tongue	21'5"	6.53 m
Length w/ Tongue Folded	18'0"	5.49 m
Length w/ Boat	24'9"	7.54 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,150 lbs	508 kg
Carrying Capacity	5,853 lbs	2,654 kg
GVWR (Gross Vehicle Weight Rating)	7,000 lbs	3,175 kg
GAWR (Gross Axle Weight Rating)	7,000 lbs	3,175 kg
Height (Top of Windshield w/ Boat on Trailer)	7'4"	2.24 m
Height (Rugged Tow)	7'5½"	2.27 m
Tire Size / Range (Standard)	ST 205/75R14-C	ST 205/75R14-C
Tire Size / Range (Rugged Tow)	ST 215/75R14-C	ST 215/75R14-C
Tire Pressure	50 PSI COLD	350 KPA COLD
Tire Pressure (Rugged Tow)	50 PSI COLD	350 KPA COLD
Tire Capacity (Standard)	1,760 lbs	798 kg
Tire Capacity (Rugged Tow)	1,870 lbs	848 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	3,500 lbs	1,588 kg
Hub	5 Lug 4½" Bolt Pattern	5 Lug 11 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,000 lbs	454 kg
Winch	1,800 lbs	818 kg
Ball Size	2"	5 cm
Ball Towing Height	21"	53.3 cm
Ball Towing Height (Rugged tow)	22½"	57 cm



255 SUNDOWNER Tandem Axle Trailer

(Model # D0255TT)

	US	METRIC
Length w/ Tongue	26'4"	8.03 m
Length w/ Tongue Folded	21'8"	6.60 m
Length w/ Boat	31'0"	9.45 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,370 lbs	622 kg
Carrying Capacity	8,634 lbs	3,916 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,535 kg
GAWR (Gross Axle Weight Rating)	10,000 lbs	4,535 kg
Height (Top of Windshield w/ Boat on Trailer)	8'3"	2.51 m
Height (Rugged Tow)	8'3"	2.51 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	2,600 lbs	1,179 kg
Ball Size	2⁵/₁₆"	6 cm
Ball Towing Height	24½"	62.23 cm
Ball Towing Height (Rugged tow)	24½"	62.23 cm



248 VISTA

Tandem Axle Trailer

	(Model #D0248BT)	
	US	METRIC
Length w/ Tongue	26'4"	8.03 m
Length w/ Tongue Folded	21'8"	6.60 m
Length w/ Boat	30'4"	9.25 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,618 lbs	734 kg
Carrying Capacity	8,382 lbs	3,801 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,535 kg
GAWR (Gross Axle Weight Rating)	10,000 lbs	4,535 kg
Height (Top of Windshield w/ Boat on Trailer)	10'0"	3.05 m
Height (Rugged Tow)	10'0"	3.05 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R14-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	2,600 lbs	1,179 kg
Ball Size	2 5/16"	6 cm
Ball Towing Height	24½"	62.23 cm
Ball Towing Height (Rugged tow)	24½"	62.23 cm



258 VISTA Tandem Axle Trailer

(Model # D0258UT)

	US	METRIC
Length w/ Tongue	26'4"	8.03 m
Length w/ Tongue Folded	21'8"	6.60 m
Length w/ Boat	30'4"	9.25 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,618 lbs	734 kg
Carrying Capacity	8,382 lbs	3,801 kg
GVWR (Gross Vehicle Weight Rating)	10,000 lbs	4,535 kg
GAWR (Gross Axle Weight Rating)	10,000 lbs	4,535 kg
Height (Top of Windshield w/ Boat on Trailer)	10'0"	3.05 m
Height (Rugged Tow)	10'0"	3.05 m
Tire Size / Range (Standard)	ST 225/75R15-D	ST 225/75R15-D
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	65 PSI COLD	450 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	5,000 lbs	2,268 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	2,600 lbs	1,179 kg
Ball Size	2 5/16"	6 cm
Ball Towing Height	24½"	62.23 cm
Ball Towing Height (Rugged tow)	24½"	62.23 cm



278 VISTA

Tandem Axle Trailer

(Model #D0278YT)

	US	METRIC
Length w/ Tongue	29'0"	8.84 m
Length w/ Tongue Folded	24'4"	7.42 m
Length w/ Boat	34'0"	10.36 m
Width	8'6"	2.59 m
Empty Weight w/ spare	1,741 lbs	790 kg
Carrying Capacity	9,259 lbs	4,199 kg
GVWR (Gross Vehicle Weight Rating)	11,000 lbs	4,989 kg
GAWR (Gross Axle Weight Rating)	11,000 lbs	4,989 kg
Height (Top of Windshield w/ Boat on Trailer)	10'8"	3.25 m
Height (Rugged Tow)	10'8"	3.25 m
Tire Size / Range (Standard)	ST 225/75R15-E	ST 225/75R15-E
Tire Size / Range (Rugged Tow)	ST 225/75R15-E	ST 225/75R15-E
Tire Pressure	80 PSI COLD	550 KPA COLD
Tire Pressure (Rugged Tow)	80 PSI COLD	550 KPA COLD
Tire Capacity (Standard)	2,540 lbs	1,152 kg
Tire Capacity (Rugged Tow)	2,830 lbs	1,283 kg
Lug Nut Torque	90-120 ft/lbs	120.6 NM-162.8NM
Axle	Tandem	Tandem
Axle Rating (Per axle)	5,500 lbs	2,494 kg
Hub	6 Lug 5½" Bolt Pattern	6 Lug 14 cm Pattern
Wheel Type	Silver	Silver
Jack Capacity	1,500 lbs	680 kg
Winch	3,200 lbs	1,451 kg
Ball Size	2 5/16"	6 cm
Ball Towing Height	24½"	62.23 cm
Ball Towing Height (Rugged tow)	24½"	62.23 cm



STERN DRIVE SPECIFICATIONS

ENGINE	MerCruiser 3.0L/A	
	US	METRIC
Power (propshaft)	135 hp	101 kw
Displacement	181 cu. in.	3.0 L
Cylinders	4	4
Bore / Stroke	4.00" x 3.60"	102 mm x 91 mm
Compression Ratio	9.3:1	9.3:1
Main Bearings	5	5
Fuel System	2 V carb TKS	2 V carb TKS
Ignition System	EST analog	EST analog
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm
DRIVE UNIT		
Model	Alpha	Alpha
Gear Ratio	2.00:1	2.00:1
Gear Ratio, High Altitude	NA	NA
Shift	Dog F-N-R	Dog F-N-R
DIMENSIONS		
Length	34"	86 cm
*Height - Above Crankshaft Centerline	20"	51 cm
Total Weight	670 lbs	304 kg
STANDARD / OPTIONAL FEATURES		
Power Trim	STD	STD
Power Steering	STD	STD
Dog Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	NA	NA
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation	NA	NA
Remote Oil Filter	NA	NA
Engine Oil Cooler	NA	NA
MerCathode	OPT	OPT
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

* Dimensional diagram is located on page 167.



STERN DRIVE SPECIFICATIONS

ENGINE	Volvo Penta 3.0 GL/SX	
	US	METRIC
Power (propshaft)	135 hp	101 kw
Displacement	181 cu. in.	3.0 L
Cylinders	4	4
Bore / Stroke	4.00" x 3.60"	102 mm x 91 mm
Compression Ratio	9.2:1	9.2:1
Main Bearings	5	5
Fuel System	2 V carb	2 V carb
Ignition System	NA	NA
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4200-4600 rpm	4200-4600 rpm
DRIVE UNIT		
Model	SX	SX
Gear Ratio	2.18:1	2.18:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R
DIMENSIONS		
Length	33¾"	86 cm
*Height - Above Crankshaft Centerline	19"	48 cm
Total Weight	670 lbs	304 kg
STANDARD / OPTIONAL FEATURES		
Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation	NA	NA
Remote Oil Filter	NA	NA
Engine Oil Cooler	NA	NA
Active Corrosion System	OPT	OPT
Volvo Penta 2-Year Limited Factory Warranty	STD	STD



FAST FACTS NOTES



STERN DRIVE SPECIFICATIONS

ENGINE	MerCruiser 4.3L/A	
	US	METRIC
Power (propshaft)	190 hp	142 kw
Displacement	262 cu. in.	4.3 L
Cylinders	6	6
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	4	4
Fuel System	2 V carb TKS	2 V carb TKS
Ignition System	Thunderbolt V	Thunderbolt V
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm
DRIVE UNIT		
Model	Alpha	Alpha
Gear Ratio	1.81:1	1.81:1
Gear Ratio, High Altitude	2.00:1	2.00:1
Shift	Dog F-N-R	Dog F-N-R
DIMENSIONS		
Length	33"	84 cm
*Height - Above Crankshaft Centerline	21"	53 cm
Total Weight	848 lbs	385 kg
STANDARD / OPTIONAL FEATURES		
Power Trim	STD	STD
Power Steering	STD	STD
Dog Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	NA	NA
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation	NA	NA
Remote Oil Filter	OPT	OPT
Engine Oil Cooler	NA	NA
MerCathode	OPT	OPT
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

* Dimensional diagram is located on page 167.

STERN DRIVE SPECIFICATIONS

ENGINE	Volvo Penta 4.3GL/SX	
	US	METRIC
Power (propshaft)	190 hp	142 kw
Displacement	262 cu. in.	4.3 L
Cylinders	6	6
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	4	4
Fuel System	2 V carb	2 V carb
Ignition System	NA	NA
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4200-4600 rpm	4200-4600 rpm
DRIVE UNIT		
Model	SX	SX
Gear Ratio	1.79:1	1.79:1
Gear Ratio, High Altitude	N/A	N/A
Shift	Cone F-N-R	Cone F-N-R
DIMENSIONS		
Length	32¼"	82 cm
*Height - Above Crankshaft Centerline	20¼"	51 cm
Total Weight (SX/ Duoprop)	885 lbs	401 kg
STANDARD / OPTIONAL FEATURES		
Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation	NA	NA
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
Active Corrosion System	OPT	OPT
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.

STERN DRIVE SPECIFICATIONS

ENGINE	MerCruiser 5.0L/A	
	US	METRIC
Power (propshaft)	220 hp	164 kw
Displacement	305 cu. in.	5.0 L
Cylinders	8	8
Bore / Stroke	3.74" x 3.48"	95 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	2 V carb TKS	2 V carb TKS
Ignition System	Thunderbolt V	Thunderbolt V
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm
DRIVE UNIT		
Model	Alpha	Alpha
Gear Ratio	1.62:1	1.62:1
Gear Ratio, High Altitude	1.81:1	1.81:1
Shift	Dog F-N-R	Dog F-N-R
DIMENSIONS		
Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight	946 lbs	430 kg
STANDARD / OPTIONAL FEATURES		
Power Trim	STD	STD
Power Steering	STD	STD
Dog Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	NA	NA
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation	NA	NA
Remote Oil Filter	OPT	OPT
Engine Oil Cooler	NA	NA
MerCathode	OPT	OPT
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

STERN DRIVE SPECIFICATIONS

ENGINE Volvo Penta 5.0GL/SX/5.0GL/DP

	US	METRIC
Power (propshaft)	220 hp	164 kw
Displacement	305 cu. in.	5.0L
Cylinders	8	8
Bore / Stroke	3.74" x 3.48"	95 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	2 V carb	2 V carb
Ignition System	NA	NA
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm

DRIVE UNIT

Model	SX/ Duoprop	SX/ Duoprop
Gear Ratio	1.60:1/1.95:1	1.60:1/1.95:1
Gear Ratio, High Altitude	1.66:1/NA	1.66:1/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	36³/₄"	93 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX/Duoprop)	948 lbs/995 lbs	446 kg/451 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX/Duoprop)	NA/NA	NA/NA
Contra Rotation (SX/Duoprop)	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
Active Corrosion System	OPT	OPT
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.

STERN DRIVE SPECIFICATIONS

ENGINE MerCruiser 4.3MPI/A/4.3MPI/B3

	US	METRIC
Power (propshaft)	220 hp	164 kw
Displacement	262 cu. in.	4.3 L
Cylinders	6	6
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	4	4
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm

DRIVE UNIT

Model	Alpha/Bravo3	Alpha/Bravo3
Gear Ratio	1.81:1/2.43:1	1.81:1/2.43:1
Gear Ratio, High Altitude	2.00:1/NA	2.00:1/NA
Shift	Dog/Cone F-N-R	Dog/Cone F-N-R

DIMENSIONS

Length	33"	84 cm
*Height - Above Crankshaft Centerline	21"	53 cm
Total Weight (Alpha/Bravo3)	865/921 lbs	393/419 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Dog Clutch Shifting	STD/NA	STD/NA
Cone Clutch Shifting	NA/STD	NA/STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	NA/STD	NA/STD
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation (A/B3)	NA/NA	NA/NA
Contra Rotation (A/B3)	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
MerCathode	OPT/STD	OPT/STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 4.36XI/SX/4.36XI/DP**

	US	METRIC
Power (propshaft)	225 hp	168 kw
Displacement	262 cu. in.	4.3 L
Cylinders	6	6
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	4	4
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm

DRIVE UNIT

Model	SX/Duoprop	SX/Duoprop
Gear Ratio	1.79:1/2.32:1	1.79:1/2.32:1
Gear Ratio, High Altitude	NA/NA	NA/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	32 1/4"	82 cm
*Height - Above Crankshaft Centerline	20 1/4"	51 cm
Total Weight (SX/ Duoprop)	907/916 lbs	411/415 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX/ Duoprop)	STD/NA	STD/NA
Contra Rotation (SX/ Duoprop)	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
Active Corrosion System	OPT	OPT
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.

STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 4.30Si/XDP**

	US	METRIC
Power (propshaft)	225 hp	168 kw
Displacement	262 cu. in.	4.3 L
Cylinders	6	6
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	4	4
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm

DRIVE UNIT

Model	XDP	XDP
Gear Ratio	2.32:1	2.32:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	32 1/4"	82 cm
*Height - Above Crankshaft Centerline	20 1/4"	51 cm
Total Weight (SX/ Duoprop)	880 lbs	399 kg

STANDARD / OPTIONAL FEATURES

Composite Drive & Transom Assembly	STD	STD
Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
Neutra-Salt	STD	STD
Fresh Water Cooling	OPT	OPT
EDP Painted Exhaust Manifolds and Risers	STD	STD
Coated Oil Pan	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Fasteners	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

STERN DRIVE SPECIFICATIONS

ENGINE **MerCruiser 5.0MPI/A/5.0MPI/B1**

	US	METRIC
Power (propshaft)	260 hp	194 kw
Displacement	305 cu. in.	5.0 L
Cylinders	8	8
Bore / Stroke	3.74" x 3.48"	95 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4,600-5,000 rpm

DRIVE UNIT

Model	Alpha/Bravo1	Alpha/Bravo1
Gear Ratio	1.62:1/1.65:1	1.62:1/1.65:1
Gear Ratio, High Altitude	1.81:1/NA	1.81:1/NA
Shift	Dog/Cone F-N-R	Dog/Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (Alpha/Bravo1)	952 lbs/993 lbs	433 kg/451 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Dog Clutch Shifting	STD/NA	STD/NA
Cone Clutch Shifting	NA/STD	NA/STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	NA/STD	NA/STD
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
MerCathode	OPT/STD	OPT/STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

* Dimensional diagram is located on page 167.

STERN DRIVE SPECIFICATIONS

ENGINE **MerCruiser 5.0MPI/B3**

	US	METRIC
Power (propshaft)	260 hp	194 kw
Displacement	305 cu. in.	5.0 L
Cylinders	8	8
Bore / Stroke	3.74" x 3.48"	95 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5,000 rpm	4,600-5,000 rpm

DRIVE UNIT

Model	Bravo3	Bravo3
Gear Ratio	2.20:1/2.43:1	2.20:1/2.43:1
Gear Ratio, High Altitude	2.43:1	2.43:1
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight	1,019 lbs	463 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Contra Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
MerCathode	STD	STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD



STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 5.0GXI/SX/5.0GXI/DP**

	US	METRIC
Power (propshaft)	270 hp	201 kw
Displacement	305 cu. in.	5.0 L
Cylinders	8	8
Bore / Stroke	3.74" x 3.48"	95 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	SX/ Duoprop	SX/ Duoprop
Gear Ratio	1.60:1/1.95:1	1.60:1/1.95:1
Gear Ratio, High Altitude	1.66:1/NA	1.66:1/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX/ Duoprop)	1031 lbs/1040 lbs	468 kg/472 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX/ Duoprop)	STD/NA	STD/NA
Contra Rotation (SX/ Duoprop)	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
Active Corrosion System	OPT	OPT
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.



STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 5.00Si/XDP**

	US	METRIC
Power (propshaft)	270 hp	201 kw
Displacement	305 cu. in.	5.0 L
Cylinders	8	8
Bore / Stroke	3.74" x 3.48"	95 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	XDP	XDP
Gear Ratio	1.96:1	1.96:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX/ Duoprop)	990 lbs	449 kg

STANDARD / OPTIONAL FEATURES

Composite Drive & Transom Assembly	STD	STD
Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
Neutra-Salt	STD	STD
Fresh Water Cooling	OPT	OPT
EDP Painted Exhaust Manifolds and Risers	STD	STD
Coated Oil Pan	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Fasteners	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
Volvo Penta 2-Year Limited Factory Warranty	STD	STD



STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 5.7Gi/SX/5.7Gi/DP**

	US	METRIC
Power (propshaft)	280 hp	209 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	SX / Duoprop	SX / Duoprop
Gear Ratio	1.51:1/1.95:1	1.51:1/1.95:1
Gear Ratio, High Altitude	1.60:1/NA	1.60:1/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX / Duoprop)	1031 lbs/1040 lbs	468 kg/472 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX/ Duoprop)	STD/NA	STD/NA
Contra Rotation (SX/ Duoprop)	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
Active Corrosion System	OPT	OPT
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.



STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 5.70Si / XDP**

	US	METRIC
Power (propshaft)	280 hp	209 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	XDP	XDP
Gear Ratio	1.96:1	1.96:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX / Duoprop)	990 lbs	449 kg

STANDARD / OPTIONAL FEATURES

Composite Drive & Transom Assembly	STD	STD
Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
Neutra-Salt	STD	STD
Fresh Water Cooling	OPT	OPT
EDP Painted Exhaust Manifolds and Risers	STD	STD
Coated Oil Pan	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Fasteners	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

STERN DRIVE SPECIFICATIONS

ENGINE **MerCruiser 350MPI/B1/350MPI/B3**

	US	METRIC
Power (propshaft)	300 hp	224 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4800-5200 rpm	4800-5200 rpm

DRIVE UNIT

Model	Bravo1/Bravo3	Bravo1/Bravo3
Gear Ratio	1.65:1/2.20:1	1.65:1/2.20:1
Gear Ratio, High Altitude	NA/2.43:1	NA/2.43:1
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (Bravo1/Bravo3)	993 lbs/1019 lbs	451 kg/463 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation	STD/NA	STD/NA
Contra Rotation	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
MerCathode	STD	STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

* Dimensional diagram is located on page 167.

STERN DRIVE SPECIFICATIONS

ENGINE **DTS MerCruiser 350MPI/B1/350MPI/B3**

	US	METRIC
Power (propshaft)	300 hp	224 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4800-5200 rpm	4800-5200 rpm

DRIVE UNIT

Model	Bravo1/Bravo3	Bravo1/Bravo3
Gear Ratio	1.65:1/2.20:1	1.65:1/2.20:1
Gear Ratio, High Altitude	NA/2.43:1	NA/2.43:1
Shift	DTS Cone F-N-R	DTS Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (Bravo1/Bravo3)	993 lbs/1019 lbs	451 kg/463 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Digital Throttle and Shift	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation	STD/NA	STD/NA
Contra Rotation	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
MerCathode	STD	STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD



STERN DRIVE SPECIFICATIONS

ENGINE **MerCruiser MX6.2/B1/MX6.2/B3**

	US	METRIC
Power (propshaft)	320 hp	239 kw
Displacement	377 cu. in.	6.2 L
Cylinders	8	8
Bore / Stroke	4.0" x 3.75"	102 mm x 95 mm
Compression Ratio	9.0:1	9.0:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4800-5200 rpm	4800-5200 rpm

DRIVE UNIT

Model	Bravo1/Bravo3	Bravo1/Bravo3
Gear Ratio	1.65:1/2.20:1	1.65:1/2.20:1
Gear Ratio, High Altitude	NA/2.43:1	NA/2.43:1
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (Bravo1/Bravo3)	993 lbs/1019kg	451 kg/463kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation	STD/NA	STD/NA
Contra Rotation	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	NA	NA
MerCathode	STD	STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

* Dimensional diagram is located on page 167.



STERN DRIVE SPECIFICATIONS

ENGINE **DTS MerCruiser MX6.2/B1/MX6.2/B3**

	US	METRIC
Power (propshaft)	320 hp	239 kw
Displacement	377 cu. in.	6.2 L
Cylinders	8	8
Bore / Stroke	4.0" x 3.75"	102 mm x 95 mm
Compression Ratio	9.0:1	9.0:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4800-5200 rpm	4800-5200 rpm

DRIVE UNIT

Model	Bravo1/Bravo3	Bravo1/Bravo3
Gear Ratio	1.65:1/2.20:1	1.65:1/2.20:1
Gear Ratio, High Altitude	NA/2.43:1	NA/2.43:1
Shift	DTS Cone F-N-R	DTS Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX / Duooprop)	993 lbs/1019 lbs	451 kg/463 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Digital Throttle and Shift	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation	STD/NA	STD/NA
Contra Rotation	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
MerCathode	STD	STD
MerCruiser 2-Year limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 5.7GX/SX/5.7GX/DP**

	US	METRIC
Power (propshaft)	320 hp	239 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	SX / Duoprop	SX / Duoprop
Gear Ratio	1.51:1/1.95:1	1.51:1/1.95:1
Gear Ratio, High Altitude	N/A	N/A
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX / Duoprop)	1031 lbs/1040 lbs	468 kg/472 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation (SX / Duoprop)	STD/NA	STD/NA
Contra Rotation (SX / Duoprop)	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Active Corrosion System	OPT	OPT
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.

STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 5.70SX/DP**

	US	METRIC
Power (propshaft)	320 hp	239 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

DRIVE UNIT

Model	XDP	XDP
Gear Ratio	1.96:1	1.96:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (SX/ Duoprop)	990 lbs	449 kg

STANDARD / OPTIONAL FEATURES

Composite Drive & Transom Assembly	STD	STD
Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
Neutra -Salt	STD	STD
Fresh Water Cooling	OPT	OPT
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Coated Oil Pan	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Fasteners	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Limited Factory Warranty	STD	STD



STERN DRIVE SPECIFICATIONS

ENGINE **MerCruiser 496MAG/B1/496/B3**

	US	METRIC
Power (propshaft)	375 hp	280 kw
Displacement	496 cu. in.	8.1 L
Cylinders	8	8
Bore / Stroke	4.25" x 4.38"	108 mm x 111 mm
Compression Ratio	9.1:1	9.1:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm

DRIVE UNIT

Model	Bravo1/Bravo3	Bravo1/Bravo3
Gear Ratio	1.50:1/2.00:1	1.50:1/2.00:1
Gear Ratio, High Altitude	NA/NA	NA/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	37"	94 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight (Bravo1/Bravo3)	1199 lbs/1225 lbs	544 kg/557 kg

STANDARD / OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	NA	NA
Drive Saver Coupler	NA	NA
Counter Rotation	STD/NA	STD/NA
Contra Rotation	NA/STD	NA/STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
MerCathode	STD	STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

* Dimensional diagram is located on page 167.



STERN DRIVE SPECIFICATIONS

ENGINE **Volvo Penta 8.1 GI/DP**

	US	METRIC
Power (propshaft)	375 hp	280 kw
Displacement	496 cu. in.	8.1 L
Cylinders	8	8
Bore / Stroke	4.25" x 4.38"	108 mm x 111 mm
Compression Ratio	9.1:1	9.1:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Elec Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4200-4600 rpm	4200-4600 rpm

DRIVE UNIT

Model	Duoprop	Duoprop
Gear Ratio	1.78:1	1.78:1
Gear Ratio, High Altitude	NA/NA	NA/NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	38½"	98cm
*Height - Above Crankshaft Centerline	21¼"	54 cm
Total Weight	1258 lbs	571 kg

STANDARD OPTIONAL FEATURES

Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Active Corrosion System	STD	STD
Volvo Penta 2-Year Limited Factory Warranty	STD	STD



STERN DRIVE SPECIFICATIONS

ENGINE

Volvo Penta 8.10Si/XDP

	US	METRIC
Power (propshaft)	375 hp	280 kw
Displacement	496 cu. in.	8.1 L
Cylinders	8	8
Bore / Stroke	4.25" x 4.38"	108 mm x 111 mm
Compression Ratio	9.1:1	9.1:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4200-4600 rpm	4200-4600 rpm

DRIVE UNIT

Model	Duoprop	Duoprop
Gear Ratio	1.78:1	1.78:1
Gear Ratio, High Altitude	NA	NA
Shift	Cone F-N-R	Cone F-N-R

DIMENSIONS

Length	38¹/₂"	98 cm
*Height - Above Crankshaft Centerline	21¹/₄"	54 cm
Total Weight	1230 lbs	557 kg

STANDARD / OPTIONAL FEATURES

Composite Drive & Transom Assembly	STD	STD
Power Trim	STD	STD
Power Steering	STD	STD
Cone Clutch Shifting	STD	STD
Neutra -Salt	STD	STD
Fresh Water Cooling	OPT	OPT
4-Anode Saltwater Protection	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Coated Oil Pan	STD	STD
Hydraulic Shock Absorbers	STD	STD
Engine Mounted Water Pump	STD	STD
Stainless Steel Heli-Coil® Inserts	STD	STD
Drive Saver Coupler	STD	STD
Contra Rotation (Duoprop)	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.



INBOARD SPECIFICATIONS

ENGINE

MerCruiser MX6.2

	US	METRIC
Power (propshaft)	320 hp	239 kw
Displacement	377 cu. in.	6.2 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.75"	102 mm x 95 mm
Compression Ratio	9.0:1	9.0:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm

TRANSMISSION

Model	ZF 63 IV	ZF 63 IV
Gear Ratio	2.51:1	2.51:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R

DIMENSIONS

Length	47"	119 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight	1010 lbs	459 kg

STANDARD / OPTIONAL FEATURES

Hydraulic Multi-Disk Clutch Shifting	STD	STD
Fresh Water Cooling	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD



INBOARD SPECIFICATIONS

ENGINE	Volvo Penta 5.7GXl	
	US	METRIC
Power (propshaft)	320 hp	239 kw
Displacement	350 cu. in.	5.7 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.48"	102 mm x 88 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4600-5000 rpm	4600-5000 rpm
TRANSMISSION		
Model	ZF 63 IV	ZF 63 IV
Gear Ratio	2.51:1	2.51:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R
DIMENSIONS		
Length	49"	124 cm
*Height - Above Crankshaft Centerline	22"	56 cm
Total Weight	1014 lbs	460 kg
STANDARD / OPTIONAL FEATURES		
Hydraulic Multi-Disk Clutch Shifting	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Fresh Water Cooling	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.



INBOARD SPECIFICATIONS

ENGINE	Volvo Penta D6-370	
	US	METRIC
Power (propshaft)	362 hp	270 kw
Displacement	336 cu. in.	5.5 L
Cylinders	6	6
Bore / Stroke	4.05" X 4.33"	103 mm X 110 mm
Compression Ratio	17.5:1	17.5:1
Main Bearings	7	7
Fuel System	Common-rail Direct	Common-rail Direct
	Fuel Injection	Fuel Injection
Aspiration	Turbocharged, Aftercooled	Turbocharged, Aftercooled
Alternator	115 amps/ 1620 watts	115 amps/ 1620 watts
Full Throttle Operating Range	3500-3600 rpm	3500-3600 rpm
TRANSMISSION		
Model	ZF 80 IV	ZF 80 IV
Gear Ratio	2.00:1	2.00:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R
DIMENSIONS		
Length	56"	142 cm
*Height - Above Crankshaft Centerline	30¾"	78 cm
Total Weight	1628 lbs	738 kg
STANDARD / OPTIONAL FEATURES		
Electronic Vessel Control, Shifting, Throttle	STD	STD
Hydraulic Multi-Disk Clutch Shifting	STD	STD
Fresh Water Cooling	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Engine Mounted Strainer	STD	STD
Volvo Penta 2-Year, 5-Year Major Engine Components, Limited Factory Warranty	STD	STD

INBOARD SPECIFICATIONS

ENGINE	MerCruiser 8.1S	
	US	METRIC
Power (propshaft)	370 hp	276 kw
Displacement	496 cu. in.	8.1 L
Cylinders	8	8
Bore / Stroke	4.25" x 4.38"	108 mm x 111 mm
Compression Ratio	9.1:1	9.0:1
Main Bearings	5	5
Fuel System	MPI	MPI
Ignition System	ECM 555	ECM 555
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4400-4800 rpm	4400-4800 rpm
TRANSMISSION		
Model	ZF 63 IV	ZF 63 IV
Gear Ratio	2.51:1	2.51:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R
DIMENSIONS		
Length	49"	124 cm
*Height - Above Crankshaft Centerline	24"	61 cm
Total Weight	1180 lbs	535 kg
STANDARD / OPTIONAL FEATURES		
Hydraulic Multi-Disk Clutch Shifting	STD	STD
Fresh Water Cooling	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
MerCruiser 2-Year Limited Factory Warranty	STD	STD
MerCruiser 3-Year Limited Corrosion Warranty	STD	STD

* Dimensional diagram is located on page 167.

INBOARD SPECIFICATIONS

ENGINE	Crusader 6.0 MPI	
	US	METRIC
Power (propshaft)	375 hp	280 kw
Displacement	364 cu. in.	6.0 L
Cylinders	8	8
Bore / Stroke	4.00" x 3.62"	101 mm x 92 mm
Compression Ratio	9.4:1	9.4:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	70 amps/988 watts	70 amps/988 watts
Full Throttle Operating Range	4800-5300 rpm	4800-5300 rpm
TRANSMISSION		
Model	ZF 63 IV	ZF 63 IV
Gear Ratio	2.51:1	2.51:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R
DIMENSIONS		
Length	43¹/₂"	110 cm
*Height - Above Crankshaft Centerline	24"	61 cm
Total Weight	1011 lbs	459 kg
STANDARD / OPTIONAL FEATURES		
Hydraulic Multi-Disk Clutch Shifting	STD	STD
Fresh Water Cooling	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Crusader 3-Year Limited Factory Warranty	STD	STD



INBOARD SPECIFICATIONS

ENGINE **Volvo Penta 8.1Gi**

	US	METRIC
Power (propshaft)	375 hp	280 kw
Displacement	496 cu. in.	8.1 L
Cylinders	8	8
Bore / Stroke	4.25" x 4.37"	108 mm x 111 mm
Compression Ratio	9.1:1	9.1:1
Main Bearings	5	5
Fuel System	Multiport EFI	Multiport EFI
Ignition System	Electronic Engine Management System	
Alternator	65 amps/917 watts	65 amps/917 watts
Full Throttle Operating Range	4200-4600 rpm	4200-4600 rpm

TRANSMISSION

Model	ZF 63 IV	ZF 63 IV
Gear Ratio	2.51:1	2.51:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R

DIMENSIONS

Length	50"	127 cm
*Height - Above Crankshaft Centerline	21"	53 cm
Total Weight	1236 lbs	561 kg

STANDARD / OPTIONAL FEATURES

Hydraulic Multi-Disk Clutch Shifting	STD	STD
Fresh Water Cooling	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Volvo Penta 2-Year Limited Factory Warranty	STD	STD

* Dimensional diagram is located on page 167.



INBOARD SPECIFICATIONS

ENGINE **Caterpillar 3126 385**

	US	METRIC
Power (propshaft)	385 hp	287 kw
Displacement	442 cu. in.	7.2 L
Cylinders	6	6
Bore / Stroke	4.33" x 5.00"	110 mm x 127 mm
Compression Ratio	15:1	15:1
Main Bearings	7	7
Fuel System	Mechanical Direct	Mechanical Direct
	Fuel Injection	Fuel Injection
Alternator	105 amps/1400 watts	105 amps/1400 watts
Full Throttle Operating Range	2750-2850 rpm	2750-2850 rpm

TRANSMISSION

Model	ZF 80 IV	ZF 80 IV
Gear Ratio	1.64:1	1.64:1
Shift	Multi-disc F-N-R	Multi-disc F-N-R

DIMENSIONS

Length	61"	155 cm
*Height - Above Crankshaft Centerline	25"	64 cm
Total Weight	2060 lbs	934 kg

STANDARD / OPTIONAL FEATURES

Hydraulic Multi-Disk Clutch Shifting	STD	STD
Fresh Water Cooling	STD	STD
EDP Painted Exhaust Manifolds and Risers	STD	STD
Counter Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Caterpillar 5-Year Limited Factory Warranty	STD	STD

INBOARD SPECIFICATIONS

ENGINE		
Volvo Penta IPS 400		
	US	METRIC
Power (propshaft)	295 hp	217 kw
Displacement	336 cu. in.	5.5 L
Cylinders	6	6
Bore / Stroke	4.05" x 4.33"	103 mm x 110 mm
Compression Ratio	17.5:1	17.5:1
Main Bearings	7	7
Fuel System	Common-Rail Direct Fuel Injection	Common-Rail Direct Fuel Injection
Aspiration	Turbocharged, Aftercooled	
Alternator	115 amps/1620 watts	115 amps/1620 watts
Full Throttle Operating Range	3500-3600 rpm	3500-3600 rpm
TRANSMISSION		
Model	IPS	IPS
Gear Ratio	1.94:1	1.94:1
Shift	EVC Multi-disc	EVC Multi-disc
DIMENSIONS		
Length	86"	216 cm
*Height - Above Crankshaft Centerline	30¾"	78 cm
Total Weight	1940 lbs	880 kg
STANDARD / OPTIONAL FEATURES		
Electronic Vessel Control		
Shifting, Throttle, Steering	STD	STD
Nickel-Aluminum Bronze Underwater Unit	STD	STD
Fresh Water Cooling	STD	STD
Contra Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Engine Mounted Strainer	STD	STD
Volvo Penta 2-Year, 5-Year Major Engine Components, Limited Factory Warranty	STD	STD




* Dimensional diagram is located on page 167.

INBOARD SPECIFICATIONS

ENGINE		
Volvo Penta IPS 500		
	US	METRIC
Power (propshaft)	352 hp	259 kw
Displacement	336 cu. in.	5.5 L
Cylinders	6	6
Bore / Stroke	4.05" x 4.33"	103 mm x 110 mm
Compression Ratio	17.5:1	17.5:1
Main Bearings	7	7
Fuel System	Common-Rail Direct Fuel Injection	Common-Rail Direct Fuel Injection
Aspiration	Turbocharged, Supercharged, Aftercooled	
Alternator	115 amps/1620 watts	115 amps/1620 watts
Full Throttle Operating Range	3500-3600 rpm	3500-3600 rpm
TRANSMISSION		
Model	IPS	IPS
Gear Ratio	1.94:1	1.94:1
Shift	EVC Multi-disc	EVC Multi-disc
DIMENSIONS		
Length	86"	216 cm
*Height - Above Crankshaft Centerline	30¾"	78 cm
Total Weight	1980 lbs	900 kg
STANDARD / OPTIONAL FEATURES		
Electronic Vessel Control		
Shifting, Throttle, Steering	STD	STD
Nickel-Aluminum Bronze Underwater Unit	STD	STD
Fresh Water Cooling	STD	STD
Contra Rotation	STD	STD
Remote Oil Filter	STD	STD
Engine Oil Cooler	STD	STD
Engine Mounted Strainer	STD	STD
Volvo Penta 2-Year, 5-Year Major Engine Components, Limited Factory Warranty	STD	STD



DIMENSIONAL DATA

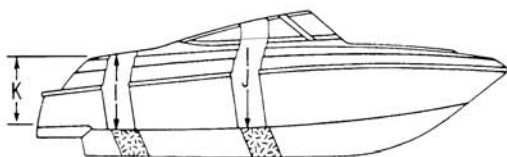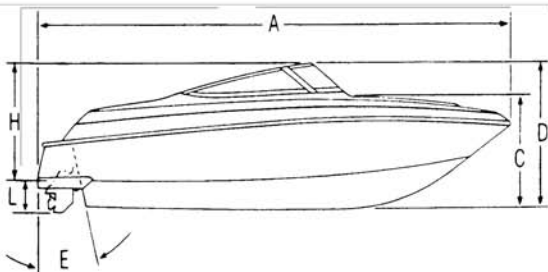

- A. LOA**
- B. BEAM**
- C. KEEL TO W/S SHELF**
- D. TOTAL HEIGHT**
- E. TRANSOM ANGLE**
- F. DEAD RISE**
- G. OB TRANSOM HEIGH.**
- H. BRIDGE CLEARANCE**
- I. COCKPIT HEIGHT STERN**
- J. COCKPIT HEIGHT HELM**
- K. FREEBOARD**
- L. DRAFT**
- M. STORAGE LENGTH - With outdrive in raised position**


WINNING EDGE™**FOUR WINNS 2006 MODEL YEAR LIFETIME LIMITED WARRANTY**

Four Winns Boats, L.L.C., warrants to you, the first North American retail owner, that it will repair or replace defects in materials or workmanship it finds to its satisfaction to occur within the applicable Warranty Periods and subject to the exclusions ("This Warranty Does Not Cover") section set forth below.

Exterior Cosmetic Gel Coat Limited Warranty: One (1) year coverage for cracking, crazing and fading except that Four Winns shall have no liability or responsibility to correct or repair any damage if the original gel surface has been altered in any way, including repair, application of any coating other than marine anti-fouling bottom paint, improper surface preparation for paint, or excessive sanding or sandblasting.

Trailer Limited Warranty: One (1) year coverage for defects in trailer components (excluding tires and paint).

Non-Structural Parts and Components Limited Warranty: Two(2) year coverage for defects in non-structural parts and components.

Osmotic Hull Blister Limited Warranty: Five year coverage against hull blistering caused by osmosis subject to the prorated schedule contained herein. The warranty provided in this section is applicable only to the original retail owner and is VOID if the original factory gel coat surface has been altered by excessive sanding, scraping, sandblasting or accident repair. A marine barrier coating with proper surface preparation is required if the boat is bottom painted or if the boat is left in fresh or salt water for more than 60 days in any 90 day period. In the event of osmotic blistering, Four Winns, will at its option repair or cause to be repaired any hull damage and apply a marine barrier coating to the affected surface area(s). For the purpose of determining coverage, osmotic blisters are defined as those blisters larger than 1/8" diameter and with a depth of 1/16" or greater which occur on the hull below the waterline. Repairs will be made (at Four Winns discretion) by the selling dealer, a designated repair facility, or the Four Winns factory. The following prorated schedule shall apply in any case of warranty coverage for parts and materials only. The repairs for osmotic blistering must be pre-approved by Four Winns prior to the commencement of any work. Four Winns must also pre-approve method and cost of the repairs.

Less than two (2) years from date of delivery	100%
Two (2) to three (3) years from date of delivery	75%
Three (3) to four (4) years from date of delivery	50%
Four (4) to five (5) years from date of delivery	25%

Warranty coverage shall be limited to one repair not to exceed \$145 per foot of boat length prior to prorating.

Structural Component Lifetime Limited Warranty: For as long as you own the boat. A structural defect shall be defined as defect that causes the hull or deck to be unsafe or unfit for use under normal operating conditions. For the purpose of this coverage, the hull is defined as the single fiberglass molded shell and integral fiberglass structural components including stringers, transom and related structural components which are below the hull flange. The deck is defined as the single fiberglass molded shell and integral fiberglass structural components above the hull flange.


WINNING EDGE™**Four Winns L.L.C.**

925 Frisbie Street • Cadillac, MI 49601
Phone: 231-775-1343 • Fax: 231-779-2345
ATTN: Customer Service Dept.

An action for breach of warranty shall be barred unless it is commenced within four (4) years from the date the cause of action accrues. An action for breach of any duty or obligation to repair or replace shall be barred unless it is commenced within one year from the date the cause of action accrues regardless of the time remaining in the Warranty Period.

THIS WARRANTY DOES NOT COVER:

1. A new boat purchased from any party other than an authorized Four Winns dealer.
2. A boat, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability.
3. Engines, outdrive, controls, propellers, batteries, appliances and other equipment or accessories that are warranted by manufacturers other than Four Winns.
4. Finished surfaces on mirrors, window glass, varnishes, paints, fabrics, chromium plated and stainless steel finishes, because of the varying effects resulting from different climactic and use conditions.
5. The cost of removal or reinstatement of parts or disassembly of units to repair or replace components covered by this warranty.
6. Any boat that has been misused, used in a negligent manner, used for racing, used for rental, charter, military or other commercial purposes, used without normal maintenance, improper lifting or trailering, operated contrary to any instruction furnished by Four Winns, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.
7. Any representation relating to speed, range, fuel consumption or other estimated performance characteristic.
8. Loss of time, inconvenience, boat payments, retail charges, travel expense, loss of use, in-and-out-of-water charges, towing and storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
9. Dealer preparation, cleaning, final adjustments and alignments in preparing the boat for delivery or commissioning.
10. Leakage around windshield, hatches or other designed openings.
11. Fit and adjustment of exterior canvas tops, enclosures, and weather covers.
12. Sacrificial deterioration of anti-fouling paint or zinc anodes.
13. Damage resulting from electrolysis or corrosion of any nature from any source.
14. Improper set up of boat on trailer or modification of trailer to accommodate other manufacturer's boats.
15. Trailer paint defects caused by fading, peeling, chipping, scratches, and rusting attributed to normal usage.


WINNING EDGE™

The sole exclusive remedy under this warranty is the repair or replacement of the warranted defects in materials or workmanship, and does not include incidental or consequential damages that are specifically DISCLAIMED. Note: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. The express limited warranty described above is exclusive.

Under the laws of certain states, there may be no implied warranties from Four Winns applicable to your boat, and all implied warranties (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) are excluded where they do not arise under applicable state law. Any **IMPLIED WARRANTIES** arising under applicable state law are **LIMITED TO THE DURATION OF THE APPLICABLE SECTION OF THIS WRITTEN WARRANTY ON ALL WARRANTED PARTS AND COMPONENTS.** ALL IMPLIED WARRANTIES, IF ANY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED AND EXCLUDED AFTER THESE PERIODS. IN NO EVENT SHALL ANY IMPLIED WARRANTY EXTEND BEYOND THE APPLICABLE STATUTE OF LIMITATIONS. There are no warranties that extend beyond the description on the face hereof. NOTE: SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS THAT VARY FROM STATE TO STATE.

This document contains the entire warranty given by Four Winns. Four Winns does not authorize any person or persons, including Four Winns dealers, to change the terms of this express limited warranty, which is Four Winns' only warranty. Four Winns reserves the right to change or improve the design or manufacture of Four Winns boats without obligation to modify any boat previously manufactured.

Four Winns Boats, L.L.C.

925 Frisbie Street
Cadillac, MI 49601
231.775.1343

WHAT OWNER SHALL DO

In the event of a failure of a PRODUCT covered by this PLAN, PRODUCT must be returned to the original selling dealer or to a dealer authorized to service the PRODUCT. The cost of returning PRODUCT to and from dealer will be paid for by owner.

Owner agrees throughout the full term of the PLAN to follow the maintenance schedules as set forth in PRODUCT Owner's Manual. Receipts showing dates and services performed must be kept and furnished to dealer if requested by FOUR WINNS.


WINNING EDGE™**GENERAL PROVISIONS**

FOUR WINNS responsibility in respect to this PLAN is limited to paying for repairs or replacement of a part or parts found to be defective in materials or workmanship, and no claims for breach of this PLAN will be cause for cancellation or rescission of the sale of PRODUCT.

Owner's registration card shall be presented to the dealer whenever owner requests service.

This PLAN is limited expressly to the terms and conditions herein set forth and cannot be modified or amended except by written agreement between FOUR WINNS and owner.

WHAT TO DO IN THE EVENT OF A CLAIM FOR SERVICE UNDER THIS PLAN

1. Customer **must return product to the original selling dealer.** If dealer is no longer selling the Four Winns product or if customer has moved to another location, then customer should call Four Winns for assistance to locate the nearest Four Winns dealer in his area.
 - A. Dealer will call and receive authorization number for repairs.
 - B. Upon completion of repairs, customer to pay dealer any monies due for non-covered items.
 - C. Purchaser assumes all liability for payment of non-authorized repairs.
 - D. Customer must sign the Four Winns warranty claim form.

IMPORTANT: SUBLET REPAIRS

2. If customer is unable to return to selling dealer and needs to sublet warranty repairs, the Four Winns Dealer will be responsible for choosing a qualified and reputable organization. The Four Winns Dealer is responsible for all work performed by the sublet repair outlet. The dealer shall:
 - A. Call the claims department at Four Winns, Cadillac, Michigan.
 - B. Provide a written estimate to be submitted to Four Winns before work commences. **DO NOT** agree to any repairs until you receive a claim authorization number!
 - C. Sublet repairs, which have been initiated because of lack of dealer service facilities, will be the responsibility of the dealer.
 - D. Attach copy of the sublet bill to the claim. Include a photo of the repair.



WINNING EDGE™



PRE-DELIVERY SERVICE

- A. The Dealer, prior to delivering a new Four Winns boat to the owner, is to make a complete inspection and perform all necessary pre-delivery services. Conscientious completion of the pre-delivery inspection on each Four Winns product by the dealer is a must! The cost of the pre-delivery inspection is the responsibility of the boat purchaser.
- B. Before delivery is made, the dealer is to complete the "Pre-Delivery Service Record" portion of the warranty by making the inspection and checking off appropriate items from the list.
- C. After completion of the necessary work, sign the form where indicated. The new owner must also sign the pre-delivery service record portion.
- D. Additional service, such as a 20 hour service check, is recommended to reduce possible future problems and build customer confidence in the dealer and Four Winns product. Cost of this service, which is normally the customer's responsibility, can be negotiated between the dealer and customer if the dealer so chooses.

POWER TRAIN/GENERATOR WARRANTY

Any matter involving the power train is the responsibility of the engine manufacturer or its authorized representative. Power train warranty is according to that offered by the manufacturer of the product, or its authorized representative in the specific country and should be addressed to it.



925 FRISBIE STREET | CADILLAC, MI 49601 | 231-775-1351

www.fourwinns.com

PART # 090-2527-06